

THE NUCLEAR REGULATORY ACT No. 29 of 2019

IN EXERCISE of the powers conferred by Section 98 of the Nuclear Regulatory Act No.29 Of 2019, the Cabinet Secretary responsible for matters relating to health, makes the following Regulations—

NUCLEAR REGULATORY (SAFE TRANSPORT OF RADIOACTIVE MATERIALS) REGULATIONS, 2021

ARRANGEMENT OF THE REGULATIONS

Regulation

PART I: PRELIMINARY

1. Citation.
2. Interpretation
3. Objective
4. Scope
5. Application

PART II: GENERAL PROVISIONS

6. Radiation Protection.
7. Emergency Response
8. Management System
9. Compliance Assurance.
10. Non Compliance With Limits on Dose Rate or Contamination.
11. Special Arrangement
12. Training.

PART III: ACTIVITY LIMITS

13. UN Numbers.

14. Basic Values for Radionuclides.
15. Determination of Basic Radionuclide Values

PART IV: CLASSIFICATION OF MATERIALS

16. Low Specific Activity (LSA)
17. Surface Contaminated Object (SCO)
18. Special Form Radioactive Material
19. Low Dispersible Radioactive Material
20. Fissile Material
21. Uranium Hexafluoride

PART V: CLASSIFICATION OF PACKAGES

22. Excepted Package
23. Type A Package
24. Type B(U); Type B(M); Type C
25. Special Arrangement

PART VI: REQUIREMENTS AND CONTROLS FOR TRANSPORT

26. Before First Shipment.
27. Before Each Shipment
28. Transport of [with] other goods
29. Other Dangerous Properties of Contents
30. Contamination and Leaking Packages
31. Transport of Excepted Packages
32. Transport of LSA and SCO in Industrial Packages or Unpackaged
33. Transport Index (TI)
34. Criticality Safety Index (CSI)
35. Limits on TI, CSI and Dose Rate
36. Categories
37. Marking
38. Labeling

39. Placarding

PART VII: CONSIGNOR RESPONSIBILITIES

40. Particulars of a Consignment.

41. Consignor's Declaration

42. Information for Carriers

43. Notification to Competent Authority

44. Possession of Certificates and Instructions.

PART VIII: TRANSPORT AND STORAGE IN-TRANSIT

45. Segregation.

46. Stowage

47. Additional Requirements for Fissile Material

48. Additional Requirements for Rail and Road

49. Additional Requirements for transport by Vessels

50. Additional Requirements for transport by Air

51. Additional Requirements for transport by Post

52. CUSTOMS OPERATIONS

53. UNDELIVERABLE CONSIGNMENTS.

54. Retention of Transport Documents By Carriers.

PART IX: REQUIREMENTS FOR RADIOACTIVE MATERIALS.

55. Special Form Radioactive Material.

56. Low Dispersible Radioactive Material.

57. Fissile Excepted Material.

PART X: REQUIREMENTS FOR PACKAGINGS AND PACKAGES.

58. General Requirements for All Packagings and Packages.

59. Additional Requirements for Packages Transported by Air

60. Excepted Packages
61. Industrial Packages Types IP-1, IP-2, IP-3
62. Additional Requirements for Types IP-2, IP-3
63. Packages Containing Uranium Hexafluoride
64. Type A Package
65. Type B(U) Package
66. Type B(M) Package
67. Type C Packages
68. Packages Containing Fissile Material
69. Content Specification for Fissile Material
70. Geometry and Temperature Requirements
71. Individual Package in Isolation
72. Package Arrays
73. Determination of CSI for Packages

PART XI: TEST PROCEDURES

74. Demonstration of Compliance
75. Leaching Test for LDRM
76. Leaching Test Methods
77. Leaching and Volumetric Leakage Assessment
78. Test for SFRM
79. Tests for LDRM

PART XII: TEST FOR PACKAGES

80. Preparation of Specimen for Testing
81. Testing for Containment, Shielding and CSI
82. Target for Drop Test
83. Test for Packagings of Uranium Hexafluoride
84. Test for Normal Transport Conditions
85. Test for Type A Packages Containing Liquid and Gases
86. Test for Accident Conditions of Transport

87. Enhanced Water Immersion Test for Type B(U), (M)
88. Water Leakage Test for Packages containing Fissile Material
89. Test for Type C Packages

*PART XIII: APPROVALS AND ADMINISTRATIVE
REQUIREMENTS*

90. General requirements
91. Approval of SFRM and LDRM
92. Approval of Fissile Excepted Materials

PART XIV: APPROVAL OF PACKAGE DESIGNS

93. Package Designs to contain Uranium Hexafluoride
94. Type B (U) and Type C Package Designs
95. Type B (M) Package Designs
96. Package Designs to Contain Fissile Material
97. Approval of Alternative Activity Limits for an Exempt Consignment of Instruments or Articles
98. Notification and Registration of Serial Numbers
99. Approval of Shipments
100. Approval of Shipments under Special Arrangement

PART XV: CERTIFICATES OF APPROVAL

101. Competent Authority Identification Marks
102. Certificate for SFRM and LDRM
103. Certificate for Fissile Excepted Material
104. Certificate for Special Arrangement
105. Certificate for Shipment
106. Certificate for Package Design
107. Certificate for Alternative Activity Limits for an Exempt Consignment of Instruments or Articles
108. Validation of Certificates
109. Transition Arrangements

SCHEDULES

PART I : PRELIMINARY

Citation.

1. These Regulations may be cited as The Nuclear Regulatory (Safe Transport of Radioactive Materials) Regulations, 2021.

Interpretation.

2. In these Regulations, unless the context otherwise requires, the following definitions shall apply for the purposes of these Regulation:

“A1” shall mean the activity value of *special form radioactive material* that is listed in Table 2 or derived in Section IV and is used to determine the activity limits for the requirements of these Regulations.

“A2” shall mean the activity value of *radioactive material*, other than *special form radioactive material*, that is listed in Table 2 or as derived and is used to determine the activity limits for the requirements of these Regulations.

“*Authority*” has the meaning assigned to it in the Act.

“*Cargo Aircraft*” shall mean any *aircraft*, other than a passenger *aircraft*, that carries goods or property.

“*Passenger Aircraft*” shall mean an *aircraft* that carries any person other than a crew member, a *carrier’s* employee in an official capacity, an authorized representative of an appropriate national authority, or a person accompanying a *consignment* or other cargo.

“*Multilateral Approval*” shall mean *approval* by the relevant *competent authority* of the country of origin of

the *design* or *shipment*, as applicable, and also, where the *consignment* is to be transported *through or into* any other country, *approval* by the *competent authority* of that country.

“*Unilateral Approval*” shall mean an *approval* of a *design* that is required to be given by the *competent authority* of the country of origin of the *design* only.

“*Carrier*” shall have the meaning assigned to it in the Act.

“*Competent authority*” shall mean any body or authority designated or otherwise recognized as such for any purpose in connection with these Regulations.

“*Compliance assurance*” shall mean a systematic programme of measures applied by a *competent authority* that is aimed at ensuring that the provisions of these Regulations are met in practice.

“*Confinement system*” shall mean the assembly of *fissile material* and *packaging* components specified by the designer and agreed to by the *competent authority* as intended to preserve criticality safety.

“*Consignee*” shall mean any person, organization or government that is entitled to take delivery of a *consignment*.

“*Consignment*” shall mean any *package* or *packages*, or load of *radioactive material*, presented by a *consignor* for transport.

“*Consignor*” shall mean any person, organization or government that prepares a *consignment* for transport.

“*Containment system*” shall mean the assembly of components of the *packaging* specified by the designer as intended to retain the *radioactive material* during transport.

“*Contamination*” shall for purpose of these Regulations mean the presence of a radioactive substance on a surface in quantities in excess of 0.4 Bq/cm² for beta and gamma emitters and *low toxicity alpha emitters*, or 0.04 Bq/cm²

for all other alpha emitters

“*Non-fixed Contamination*” shall mean *contamination* that can be removed from a surface during routine conditions of transport.

“*Fixed contamination*” shall mean *contamination* other than *non-fixed contamination*.

“*Conveyance*” shall mean:

- (a) For transport by road or rail: any *vehicle*;
- (b) For transport by water: any *vessel*, or any hold, compartment, or *defined deck area* of a *vessel*;
- (c) For transport by air: any *aircraft*.

“*Criticality safety index (CSI)*” assigned to a *package*, *overpack* or *freight container* containing *fissile material* shall mean a number that is used to provide control over the accumulation of *packages*, *overpacks* or *freight containers* containing *fissile material*.

“*Defined deck area*” shall mean the area of the weather deck of a *vessel*, or of a *vehicle* deck of a roll-on/roll-off ship or ferry, that is allocated for the stowage of *radioactive material*.

“*Design*” shall mean the description of *special form radioactive material*, *low dispersible radioactive material*, *package* or *packaging and fissile material* excepted under Regulation 20(1)(f). that enables such an item to be fully identified. The description may include specifications, engineering drawings, reports demonstrating compliance with regulatory requirements, and other relevant documentation.

“*Dose rate*” shall mean the ambient dose equivalent or the directional dose equivalent, as appropriate, per unit time, measured at the point of interest.

“*Exclusive use*” shall mean the sole use, by a single *consignor*, of a *conveyance* or of a *large freight container*, in respect of which all initial, intermediate and final loading and unloading and *shipment* are carried out in accordance with the directions of the *consignor* or

consignee, where so required by these Regulations.

“*Fissile nuclides*” shall mean uranium-233, uranium-235, plutonium-239 and plutonium-241.

“*Fissile material*” shall mean a material containing any of the *fissile nuclides*. Excluded from the definition of *fissile material* are the following:

- (a) *Natural uranium* or *depleted uranium* that is un-irradiated;
- (b) *Natural uranium* or *depleted uranium* that has been irradiated in thermal reactors only;
- (c) Material with *fissile nuclides* less than a total of 0.25 g;
- (d) Any combination of (a), (b) and/or (c).

These exclusions are only valid if there is no other material with *fissile nuclides* in the *package* or in the *consignment* if shipped unpackaged.

“*Freight container*” shall mean an article of transport equipment that is of a permanent character and is strong enough to be suitable for repeated use; specially designed to facilitate the transport of goods by one or other modes of transport without intermediate reloading, designed to be secured and/or readily handled, and having fittings for these purposes. The term *freight container* does not include the *vehicle*.

“*Small freight container*” shall mean a *freight container* that has an internal volume of not more than 3 m³. A *large freight container* shall mean a *freight container* that has an internal volume of more than 3 m³.

“*Intermediate bulk container (IBC)*” shall mean a portable *packaging* that:

- (a) Has a capacity of not more than 3 m³;
- (b) Is designed for mechanical handling;
- (c) Is resistant to the stresses produced during handling and transport, as determined by tests.

“*Low dispersible radioactive material (LDRM)*” shall mean either a solid *radioactive material* or a solid *radioactive material* in a sealed capsule that has limited dispersibility and is not in powder form.

“Low specific activity (LSA)” material shall mean *radioactive material* that by its nature has a limited *specific activity*, or *radioactive material* for which limits of estimated average *specific activity* apply. External shielding materials surrounding the *LSA material* shall not be considered in determining the estimated average *specific activity*.

“Low toxicity alpha emitters” are: *natural uranium, depleted uranium, natural thorium, uranium-235, uranium-238, thorium-232, thorium-228 and thorium-230* when contained in ores, or in physical and chemical concentrates; or alpha emitters with a half-life of less than 10 days.

“Management system” shall mean a set of interrelated or interacting elements for establishing policies and objectives and enabling the objectives to be achieved in an efficient and effective manner.

“Maximum normal operating pressure” shall mean the maximum pressure above atmospheric pressure at mean sea level that would develop in the *containment system* in a period of one year under the conditions of temperature and solar radiation corresponding to the environmental conditions in the absence of venting, external cooling by an ancillary system, or operational controls during transport.

“Overpack” shall mean an enclosure used by a single *consignor* to contain one or more *packages*, and to form one unit for convenience of handling and stowage during transport.

“Package” shall mean the complete product of the packing operation, consisting of the *packaging* and its contents prepared for transport. The types of *package* covered by these Regulations that are subject to the activity limits and material restrictions and meet the corresponding requirements are:

- (a) *Excepted package*;
- (b) *Industrial package Type 1 (Type IP-1)*;
- (c) *Industrial package Type 2 (Type IP-2)*;
- (d) *Industrial package Type 3 (Type IP-3)*;
- (e) *Type A package*;

- (f) *Type B(U) package;*
- (g) *Type B(M) package;*
- (h) *Type C package.*

“*Packaging*” shall mean one or more receptacles and any other components or materials necessary for the receptacles to perform containment and other safety functions.

“*Radiation protection programme*” shall mean systematic arrangements that are aimed at providing adequate consideration of radiation protection measures.

“*Radioactive contents*” shall mean the *radioactive material* together with any contaminated or activated solids, liquids and gases within the *packaging*.

“*Radioactive material*” shall mean any material containing radionuclides where both the activity concentration and the total activity in the *consignment* exceed the values specified in Regulations 14 to 15(5).

“*Shipment*” shall mean the specific movement of a *consignment* from origin to destination.

“*Special arrangement*” shall mean those provisions, approved by the *competent authority*, under which *consignments* that do not satisfy all the applicable requirements of these Regulations may be transported.

“*Special form radioactive material*” shall mean either an indispersible solid *radioactive material* or a sealed capsule containing *radioactive material*.

“*Specific activity*” of a radionuclide shall mean the activity per unit mass of that nuclide. The *specific activity* of a material shall mean the activity per unit mass of the material in which the radionuclides are essentially uniformly distributed.

“*Surface contaminated object (SCO)*” shall mean a solid object that is not itself radioactive but which has *radioactive material* distributed on its surface.

“*Tank*” shall mean a portable *tank* (including a *tank*

container), a road *tank vehicle*, a rail *tank wagon* or a receptacle that contains solids, liquids, or gases, having a capacity of not less than 450 L when used for the transport of gases.

“*Through or into*” shall mean *through or into* the countries in which a *consignment* is transported but specifically excludes countries over which a *consignment* is carried by air, provided that there are no scheduled stops in those countries.

“*Transport index (TI)*” assigned to a *package*, *overpack* or *freight container*, or to unpackaged *LSA-I*, *SCO-I* or *SCO-III*, shall mean a number that is used to provide control over radiation exposure.

“*Unirradiated thorium*” shall mean thorium containing not more than 10^{-7} g of uranium-233 per gram of thorium-232.

“*Unirradiated uranium*” shall mean *uranium* containing not more than 2×10^3 Bq of plutonium per gram of uranium-235, not more than 9×10^6 Bq of fission products per gram of uranium-235 and not more than 5×10^{-3} g of uranium-236 per gram of uranium-235.

Uranium — natural, depleted, enriched

“*Natural uranium*” shall mean *uranium* (which may be chemically separated) containing the naturally occurring distribution of *uranium* isotopes (approximately 99.28% uranium-238 and 0.72% uranium-235, by mass).

“*Depleted uranium*” shall mean *uranium* containing a lesser mass percentage of uranium-235 than *natural uranium*.

“*Enriched uranium*” shall mean *uranium* containing a greater mass percentage of uranium-235 than 0.72%. In all cases, a very small mass percentage of uranium-234 is present.

“*Vehicle*” shall mean a road *vehicle* (including an articulated *vehicle*, i.e. a tractor and semi-trailer combination), railroad car or railway wagon. Each trailer

	<p>shall be considered as a separate <i>vehicle</i>.</p> <p>“<i>Vessel</i>” shall mean any sea-going <i>vessel</i> or inland waterway craft used for carrying cargo.</p>
Objective.	<p>3. The object of these Regulations is to establish requirements that must be satisfied to ensure safety and to protect people, property, and the environment from harmful effects of ionizing radiation during the transport of <i>radioactive material</i>. This protection is achieved by requiring:</p> <ul style="list-style-type: none"> (a) Containment of the <i>radioactive contents</i>; (b) Control of external <i>dose rate</i>; (c) Prevention of criticality; (d) Prevention of damage caused by heat.
Scope.	<p>4.(1) The regulations shall apply to the transport of <i>radioactive material</i> by all modes on land, water, or in the air, including transport that is incidental to the use of the <i>radioactive material</i>.</p> <p>4(2).These regulations shall not apply to any of the following:</p> <ul style="list-style-type: none"> (a) <i>Radioactive material</i> that is an integral part of the means of transport. (b) <i>Radioactive material</i> moved within an establishment that is subject to appropriate safety regulations in force in the establishment and where the movement does not involve public roads or railways. (c) <i>Radioactive material</i> implanted or incorporated into a person or live animal for diagnosis or treatment. (d) <i>Radioactive material</i> in or on a person who is to be transported for medical treatment because the person has been subject to accidental or deliberate intake of <i>radioactive material</i> or to <i>contamination</i>. (e) <i>Radioactive material</i> in consumer products that have received regulatory <i>approval</i>, following their sale to the end user. (f) Natural material and ores containing naturally occurring radionuclides, which may have been processed, provided the activity concentration of the material does not exceed 10 times the values specified in Table 2, or calculated in accordance with Regulation 15(1).(a) and 15.(2) –15(5). For

	<p>natural materials and ores containing naturally occurring radionuclides that are not in secular equilibrium the calculation of the activity concentration shall be performed in accordance with Regulation 15(3).</p> <p>(g) Non-radioactive solid objects with radioactive substances present on any surface in quantities not in excess of the levels defined as <i>Contamination</i>.</p>
Application.	<p>5.(1) These Regulations apply to all operations and conditions associated with, and involved in, the movement of <i>radioactive material</i>; these include the <i>design</i>, manufacture, maintenance and repair of <i>packaging</i>; and the preparation, consigning, loading, carriage including in-transit storage, <i>shipment</i> after storage, unloading and receipt at the final destination of loads of <i>radioactive material</i> and <i>packages</i>.</p> <p>5(2). These regulations shall apply in addition to any other existing legislation on transport of radioactive materials..</p>
	<p>PART II: GENERAL PROVISIONS</p>
Radiation Protection.	<p>6(1) Doses to persons shall be below the relevant dose limits. Protection and safety shall be optimized in order that the magnitude of individual doses, the number of persons exposed and the likelihood of incurring exposure shall be kept as low as reasonably achievable, economic and social factors being taken into account, within the restriction that the doses to individuals are subject to dose constraints.</p> <p>6(2) A <i>radiation protection programme</i> shall be established for the transport of <i>radioactive material</i>. The nature and extent of the measures to be employed in the programme shall be related to the magnitude and likelihood of radiation exposure. The programme shall incorporate the requirements of Regulations 6(1), 6(3) – 7(2), 12(1) and. 45(1). Programme documents shall be available, on request, for inspection by the relevant <i>competent authority</i>.</p> <p>6(3) For occupational exposures arising from transport</p>

	<p>activities, where it is assessed that the effective dose either:</p> <p>(a) Is likely to be between 1 and 6 mSv in a year, a dose assessment programme via workplace monitoring or individual monitoring shall be conducted; or</p> <p>(b) Is likely to exceed 6 mSv in a year, individual monitoring shall be conducted.</p> <p>When workplace monitoring or individual monitoring is conducted, appropriate records shall be kept.</p>
<p>Emergency Response.</p>	<p>7(1) In the event of a nuclear or radiological emergency during the transport of <i>radioactive material</i>, provisions as established by relevant national and/or international organizations shall be observed to protect people, property and the environment. <i>Consignors</i> and <i>carriers</i> shall establish, in advance, arrangements for preparedness and response in accordance with the national and/or international requirements and in a consistent and coordinated manner with the national and/or international emergency arrangements and emergency management system.</p> <p>7(2) The arrangements for preparedness and response shall be based on the graded approach and shall take into consideration the identified hazards and their potential consequences, including the formation of other dangerous substances that may result from the reaction between the contents of a <i>consignment</i> and the environment in the event of a nuclear or radiological emergency.</p>
<p>Management System.</p>	<p>8.A <i>management system</i> based on international, national or other standards acceptable to the <i>Authority</i> shall be established and implemented for all activities within the scope of these Regulations, to ensure compliance with the relevant provisions of these Regulations. Certification that the <i>design</i> specification has been fully implemented shall be available to the <i>Authority</i>. The manufacturer, <i>consignor</i> or user shall be prepared:</p> <p>(1) To provide facilities for inspection during manufacture and use;</p> <p>(2) To demonstrate compliance with these Regulations to the <i>competent authority</i>.</p>

<p>Compliance Assurance.</p>	<p>9(1) The <i>Authority</i> shall assure compliance with these Regulations.</p> <p>9(2) The <i>Authority</i> shall arrange for periodic assessments of the radiation doses to persons due to the transport of <i>radioactive material</i>, to ensure that the system of protection and safety complies with relevant provisions of the Act.</p>
<p>Non-Compliance With Limits on Dose Rate or Contamination .</p>	<p>10 In the event of non-compliance with any limit in these Regulations applicable to <i>dose rate</i> or <i>contamination</i>:</p> <p>(1) The <i>consignor</i>, <i>consignee</i>, <i>carrier</i> and any organization involved during transport who may be affected, as appropriate, shall be informed of the non-compliance by:</p> <ul style="list-style-type: none"> (i) The <i>carrier</i> if the non-compliance is identified during transport; or (ii) The <i>consignee</i> if the non-compliance is identified at receipt. <p>(2) The <i>consignor</i>, <i>carrier</i> or <i>consignee</i>, as appropriate, shall:</p> <ul style="list-style-type: none"> (i) Take immediate steps to mitigate the consequences of the non-compliance; (ii) Investigate the non-compliance and its causes, circumstances and consequences; (iii) Take appropriate action to remedy the causes and circumstances that led to the non-compliance and to prevent a recurrence of the causes and circumstances similar to those that led to the non-compliance; (iv) Communicate to the relevant <i>competent authority</i> the causes of the non-compliance and the corrective or preventive actions taken or to be taken. <p>(c) The communication of the non-compliance to the <i>consignor</i> and the relevant <i>competent authority</i>, respectively, shall be made as soon as practicable and shall be immediate whenever an emergency exposure situation has developed or is developing.</p>
<p>Special Arrangement.</p>	<p>11. <i>Consignments</i> for which conformity with the other provisions of these Regulations is impracticable shall not be transported except under <i>special arrangement</i>. Provided the <i>competent authority</i> is satisfied that conformity with the other provisions of these Regulations</p>

	<p>is impracticable and that the requisite standards of safety established by these Regulations have been demonstrated through means alternative to the other provisions of these Regulations, the <i>competent authority</i> may approve <i>special arrangement</i> transport operations for a single <i>consignment</i> or a planned series of multiple <i>consignments</i>. The overall level of safety in transport shall be at least equivalent to that which would be provided if all the applicable requirements in these Regulations had been met. For <i>consignments</i> of this type, <i>multilateral approval</i> shall be required.</p>
<p>Training.</p>	<p>12(1) Workers shall receive appropriate training concerning radiation protection, including the precautions to be observed in order to restrict their occupational exposure and the exposure of other persons who might be affected by their actions.</p> <p>12(2). Persons engaged in the transport of <i>radioactive material</i> shall receive training on the contents of these Regulations commensurate with their responsibilities.</p> <p>12(3). Persons such as those who classify <i>radioactive material</i>; pack <i>radioactive material</i>; mark and label <i>radioactive material</i>; prepare transport documents for <i>radioactive material</i>; offer or accept <i>radioactive material</i> for transport; carry or handle <i>radioactive material</i> during transport; mark or placard or load or unload <i>packages of radioactive material</i> into or from transport <i>vehicles</i>, bulk <i>packagings</i> or <i>freight containers</i>; or are otherwise directly involved in the transport of <i>radioactive material</i> as determined by the <i>competent authority</i>; shall receive the following training:</p> <p>(a) General awareness/familiarization training:</p> <p>(i) Each person shall receive training designed to provide familiarity with the general provisions of these Regulations.</p> <p>(ii) The general awareness/familiarization training shall include a description of the categories of <i>radioactive material</i>; labeling, marking, placarding and <i>packaging</i> and segregation requirements; the purpose and content of the <i>radioactive material</i> transport document; and the available emergency response documents.</p> <p>(b) Function specific training: Each person shall receive</p>

	<p>detailed training concerning specific <i>radioactive material</i> transport requirements that are applicable to the function that person performs.</p> <p>(c) Safety training: Commensurate with the risk of exposure in the event of a release, and with the functions performed, each person shall receive training on:</p> <ul style="list-style-type: none"> (i) Methods and procedures for avoidance of accident conditions during transport, such as proper use of <i>package</i> handling equipment and appropriate methods of stowage of <i>radioactive material</i>. (ii) Available emergency response information and how to use it. (iii) General hazards presented by the various categories of <i>radioactive material</i> and how to prevent exposure to those hazards, including, if appropriate, the use of personal protective clothing and equipment. (iv) Procedures to be immediately followed in the event of an unintentional release of <i>radioactive material</i>, including any emergency response procedures for which the person is responsible and personal protection procedures to be followed. <p>12(4). Records of all safety training undertaken shall be kept by the employer and made available to the employee if requested.</p> <p>12(5).The required training shall be provided or verified upon employment in a position involving <i>radioactive material</i> transport and shall be periodically supplemented with retraining as deemed appropriate by the <i>Authority</i>.</p>
	<p>SECTION IV: PART IV: ACTIVITY LIMITS</p>
<p>United Nations Numbers.</p>	<p>13, <i>Radioactive material</i> shall be assigned one of the United Nations (UN) numbers specified in Table 1 in accordance with Regulations 16(1) to 25.</p>
<p>Basic Radionuclide Values.</p>	<p>14.The following basic values for individual radionuclides are given in Table 2:</p> <ul style="list-style-type: none"> (a) <i>A1</i> and <i>A2</i> in TBq; (b) Activity concentration limits for exempt material in Bq/g;

	(c) Activity limits for exempt <i>consignments</i> in Bq.
Determination of Basic Radionuclide Values.	<p>15(1).For individual radionuclides:</p> <p>(a) That are not listed in Table 2, the determination of the basic radionuclide values referred to in Regulation 14 shall require <i>multilateral approval</i>. For these radionuclides, activity concentrations for exempt material and activity limits for exempt <i>consignments</i> shall be calculated in accordance with the principles established in GSR Part 3 [2]. It is permissible to use an A2 value calculated using a dose coefficient for the appropriate lung absorption type, as recommended by the International Commission on Radiological Protection, if the chemical forms of each radionuclide under both normal and accident conditions of transport are taken into consideration. Alternatively, the radionuclide values in Table 3 may be used without obtaining <i>competent authority approval</i>.</p> <p>(b) In instruments or articles in which the <i>radioactive material</i> is enclosed in or is included as a component part of the instrument or other manufactured article and which meets Regulation 22(3)(c), alternative basic radionuclide values to those in Table 2 for the activity limit for an exempt <i>consignment</i> are permitted and shall require <i>multilateral approval</i>. Such alternative activity limits for an exempt <i>consignment</i> shall be calculated in accordance with the principles set out in GSR Part 3 [2].</p> <p>15.(2)In the calculations of A1 and A2 for a radionuclide not listed in Table 2, a single radioactive decay chain in which the radionuclides are present in their naturally occurring proportions, and in which no progeny nuclide has a half-life either longer than 10 days or longer than that of the parent nuclide, shall be considered as a single radionuclide; and the activity to be taken into account and the A1 or A2 value to be applied shall be that corresponding to the parent nuclide of that chain. In the case of radioactive decay chains in which any progeny nuclide has a half-life either longer than 10 days or longer than that of the parent nuclide, the parent and such progeny nuclides shall be considered as mixtures of different nuclides.</p>

15(3). For mixtures of radionuclides, the basic radionuclide values referred to in Regulation 14. may be determined as follows:

$$X_m = 1 / \sum_i \frac{f(i)}{X(i)}$$

where

$f(i)$ is the fraction of activity or activity concentration of radionuclide i in the mixture.

$X(i)$ is the appropriate value of A_1 or A_2 , or the activity concentration limit for exempt material or the activity limit for an exempt *consignment* as appropriate for radionuclide i .

X_m is the derived value of A_1 or A_2 , or the activity concentration limit for exempt material or the activity limit for an exempt *consignment* in the case of a mixture.

15(4).When the identity of each radionuclide is known but the individual activities of some of the radionuclides are not known, the radionuclides may be grouped and the lowest radionuclide value, as appropriate for the radionuclides in each group, may be used in applying the formulas in Regulation 15(3) and 23(3). Groups may be based on the total alpha activity and the total beta/gamma activity, when these are known, using the lowest radionuclide values for the alpha emitters or beta/gamma emitters, respectively.

15(5).For individual radionuclides or for mixtures of radionuclides for which relevant data are not available, the values shown in Table 3 shall be used.

CLASSIFICATION OF MATERIAL

Low specific activity (LSA) material.

16(1). *Radioactive material* may only be classified as *LSA material* if the definition and conditions of Regulation 16(2)– 16(4) and 32(1) – 32(6) are met.

16(2) *LSA material* shall be in one of three groups:

(a) *LSA-I*:

(i) *Uranium* and thorium ores and concentrates of such ores, and other ores containing naturally

occurring radionuclides.

(ii) *Natural uranium, depleted uranium*, natural thorium or their compounds or mixtures, that are unirradiated and in solid or liquid form.

(iii) *Radioactive material* for which the A_2 value is unlimited. *Fissile material* may be included only if excepted under Regulation 20(1).

(iv) Other *radioactive material* in which the activity is distributed throughout and the estimated average *specific activity* does not exceed 30 times the values for the activity concentration specified in Regulation 14–15(5). *Fissile material* may be included only if excepted under Regulation 20(1).

(b) *LSA-II*:

(i) Water with a tritium concentration of up to 0.8 TBq/L;

(ii) Other material in which the activity is distributed throughout and the estimated average *specific activity* does not exceed $10-4A_2/g$ for solids and gases, and $10-5A_2/g$ for liquids.

(c) *LSA-III*:

Solids (e.g. consolidated wastes, activated materials), excluding powders, in which:

(i) The *radioactive material* is distributed throughout a solid or a collection of solid objects, or is essentially uniformly distributed in a solid compact binding agent (such as concrete, bitumen and ceramic).

(ii) The estimated average *specific activity* of the solid, excluding any shielding material, does not exceed $2 \times 10^{-3} A_2/g$.

16(3). A single *package* of non-combustible solid *LSA-II* or *LSA-III* material, if carried by air, shall not contain an activity greater than $3000A_2$.

16(4). The *radioactive contents* in a single *package* of *LSA material* shall be so restricted that the *dose rate* specified in Regulation 32(1) shall not be exceeded, and the activity in a single *package* shall also be so restricted that the activity limits for a *conveyance* specified in Regulation 32(6) shall not be exceeded.

<p>Surface contaminated object (SCO)</p>	<p>17(1). <i>Radioactive material</i> may be classified as <i>SCO</i> if the definition and conditions in Regulation 17(2), 17(3).and 32(1) – 32(6) are met.</p> <p>17(2). Surface contaminated object (<i>SCO</i>) shall be in one of three groups:</p> <p>(a) <i>SCO-I</i>: A solid object on which:</p> <ul style="list-style-type: none"> (i) The <i>non-fixed contamination</i> on the accessible surface averaged over 300cm² (or the area of the surface if less than 300cm²) does not exceed 4 Bq/cm² for beta and gamma emitters and <i>low toxicity alpha emitters</i>, or 0.4Bq/cm² for all other alpha emitters; (ii) The <i>fixed contamination</i> on the accessible surface averaged over 300cm² (or the area of the surface if less than 300cm²) does not exceed 4×10⁴ Bq/cm² for beta and gamma emitters and <i>low toxicity alpha emitters</i>, or 4000 Bq/cm² for all other alpha emitters; (iii) The <i>non-fixed contamination</i> plus the <i>fixed contamination</i> on the inaccessible surface averaged over 300cm² (or the area of the surface if less than 300cm²) does not exceed 4×10⁴Bq/cm² for beta and gamma emitters and <i>low toxicity alpha emitters</i>, or 4000 Bq/cm² for all other alpha emitters. <p>(b) <i>SCO-II</i>: A solid object on which either the <i>fixed</i> or <i>non-fixed contamination</i> on the surface exceeds the applicable limits specified for <i>SCO-I</i> in (a) above and on which:</p> <ul style="list-style-type: none"> (i) The <i>non-fixed contamination</i> on the accessible surface averaged over 300cm² (or the area of the surface if less than 300cm²) does not exceed 400Bq/cm² for beta and gamma emitters and <i>low toxicity alpha emitters</i>, or 40Bq/cm² for all other alpha emitters; (ii) The <i>fixed contamination</i> on the accessible surface averaged over 300cm² (or the area of the surface if less than 300cm²) does not exceed 8×10⁵Bq/cm² for beta and gamma emitters and <i>low toxicity alpha emitters</i>, or 8×10⁴Bq/cm² for all other alpha emitters; (iii) The <i>non-fixed contamination</i> plus the <i>fixed</i>
--	---

	<p><i>contamination</i> on the inaccessible surface averaged over 300cm² (or the area of the surface if less than 300cm²) does not exceed 8×10⁵Bq/cm² for beta and gamma emitters and <i>low toxicity alpha emitters</i>, or 8×10⁴Bq/cm² for all other alpha emitters.</p> <p>(c) <i>SCO-III</i>: A large solid object which, because of its size, cannot be transported in a type of <i>package</i> described in these Regulations and for which:</p> <p>(i) All openings are sealed to prevent release of <i>radioactive material</i> during conditions defined in Regulation 32(4)(e);</p> <p>(ii) The inside of the object is as dry as practicable;</p> <p>(iii) The <i>non-fixed contamination</i> on the external surfaces does not exceed the limits specified in Regulation 30(1);</p> <p>(iv) The <i>non-fixed contamination</i> plus the <i>fixed contamination</i> on the inaccessible surface averaged over 300 cm² does not exceed 8×10⁵Bq/cm² for beta and gamma emitters and <i>low toxicity alpha emitters</i>, or 8×10⁴ Bq/cm² for all other alpha emitters.</p> <p>17(3).The <i>radioactive contents</i> in a single <i>package</i> of <i>SCO</i> shall be so restricted that the <i>dose rate</i> specified in Regulation 32(1) shall not be exceeded, and the activity in a single <i>package</i> shall also be so restricted that the activity limits for a <i>conveyance</i> specified in Regulation 32(6) shall not be exceeded.</p>
Special Form Radioactive Material.	18. <i>Radioactive material</i> may be classified as <i>special form radioactive material</i> only if it meets the requirements of Regulation 55(1)–55(3) and Regulation 90(2).
Low Dispersible Radioactive Material.	19. <i>Radioactive material</i> may be classified as <i>low dispersible radioactive material</i> only if it meets the requirements of Regulation 56, taking into account the requirements of Regulation 65(14) and 90(2).
Fissile Material.	20(1). <i>Fissile material</i> and <i>packages</i> containing <i>fissile material</i> shall be classified under the relevant entry as “FISSILE” in accordance with Table 1 unless excepted by one of the provisions of subparagraphs (a)–(f) of this paragraph and transported subject to the requirements of Regulation 47(3). All provisions apply only to material in

	<p><i>packages</i> that meet the requirements of Regulation 64(2), unless unpackaged material is specifically allowed in the provision:</p> <p>(a) <i>Uranium</i> enriched in uranium-235 to a maximum of 1% by mass, and with a total plutonium and uranium-233 content not exceeding 1% of the mass of uranium-235, provided that the <i>fissile nuclides</i> are distributed essentially homogeneously throughout the material. In addition, if uranium-235 is present in metallic, oxide or carbide forms, it shall not form a lattice arrangement.</p> <p>(b) Liquid solutions of uranyl nitrate enriched in uranium-235 to a maximum of 2% by mass, with a total plutonium and uranium-233 content not exceeding 0.002% of the mass of <i>uranium</i>, and with a minimum nitrogen to <i>uranium</i> atomic ratio (N/U) of 2.</p> <p>(c) <i>Uranium</i> with a maximum <i>uranium</i> enrichment of 5% by mass of uranium-235 provided:</p> <p>(i) There is no more than 3.5 g of uranium-235 per <i>package</i>.</p> <p>(ii) The total plutonium and uranium-233 content does not exceed 1% of the mass of uranium-235 per <i>package</i>.</p> <p>(iii) Transport of the <i>package</i> is subject to the <i>consignment</i> limit provided in Regulation 47(3). (c).</p> <p>(d) <i>Fissile nuclides</i> with a total mass not greater than 2.0 g per <i>package</i>, provided the <i>package</i> is transported subject to the <i>consignment</i> limit provided in Regulation 47(3)(d).</p> <p>(e) <i>Fissile nuclides</i> with a total mass not greater than 45 g, either packaged or unpackaged, subject to the requirements of Regulation 47(3)(e).</p> <p>(f) A <i>fissile material</i> that meets the requirements of Regulations 47(3)(b), 57 and 90(2).</p> <p>20(2).The contents of <i>packages</i> containing <i>fissile material</i> shall be as specified for the <i>package design</i>, either directly in these Regulations or in the certificate of approval.</p>
Uranium Hexafluoride.	21(1).Uranium hexafluoride shall be assigned to one of

	<p>the following UN numbers only:</p> <ul style="list-style-type: none"> (a) UN 2977, RADIOACTIVE MATERIAL, URANIUM HEXAFLUORIDE, FISSILE; (b) UN 2978, RADIOACTIVE MATERIAL, URANIUM HEXAFLUORIDE, non-fissile or fissile-excepted; (c) UN 3507, URANIUM HEXAFLUORIDE, RADIOACTIVE MATERIAL, EXCEPTED PACKAGE, less than 0.1 kg per <i>package</i>, non-fissile or fissile-excepted. <p>21(2).The contents of a <i>package</i> containing uranium hexafluoride shall comply with the following requirements:</p> <ul style="list-style-type: none"> (a) The mass of uranium hexafluoride shall not be different from that allowed for by the <i>package design</i>. (b) The mass of uranium hexafluoride shall not be greater than a value that would lead to an ullage of less than 5% at the maximum temperature of the <i>package</i>, as specified for in the plant systems where the <i>package</i> might be used. (c) The uranium hexafluoride shall be in solid form and the internal pressure shall not be above atmospheric pressure when presented for transport.
	<p>CLASSIFICATION OF PACKAGES</p>
<p>Excepted Package</p>	<p>22(1). The quantity of <i>radioactive material</i> in a <i>package</i> shall not exceed the relevant limits for the <i>package</i> type as specified below.</p> <p>22(2).A <i>package</i> may be classified as an <i>excepted package</i> if it meets one of the following conditions:</p> <ul style="list-style-type: none"> (a) It is an empty <i>package</i> having contained <i>radioactive material</i>; (b) It contains instruments or articles not exceeding the activity limits specified in Table 4; (c) It contains articles manufactured of <i>natural uranium, depleted uranium</i> or natural thorium; (d) It contains <i>radioactive material</i> not exceeding the activity limits specified in Table 4; (e) It contains less than 0.1 kg of uranium hexafluoride not exceeding the activity limits specified in column 4 of

Table 4.

22(3). *Radioactive material* that is enclosed in or is included as a component part of an instrument or other manufactured article, may be classified under

UN 2911, RADIOACTIVE MATERIAL, EXCEPTED PACKAGE — INSTRUMENTS or ARTICLES,

provided that:

- (a) The *dose rate* at 10 cm from any point on the external surface of any unpackaged instrument or article is not greater than 0.1 mSv/h.
- (b) Each instrument or article bears the mark “RADIOACTIVE” on its external surface except for the following:
 - (i) Radioluminescent timepieces or devices do not require marks.
 - (ii) Consumer products that have either received regulatory *approval* in accordance with Regulation 4(2)(e) or do not individually exceed the activity limit for an exempt *consignment* in Table 2 (column 5) do not require marks, provided that such products are transported in a *package* that bears the mark “RADIOACTIVE” on its internal surface in such a manner that a warning of the presence of *radioactive material* is visible on opening the *package*.
 - (iii) Other instruments or articles too small to bear the mark “RADIOACTIVE” do not require marks, provided that they are transported in a *package* that bears the mark “RADIOACTIVE” on its internal surface in such a manner that a warning of the presence of *radioactive material* is visible on opening the *package*.
- (c) The active material is completely enclosed by non-active components (a device performing the sole function of containing *radioactive material* shall not be considered to be an instrument or manufactured article).
- (d) The limits specified in columns 2 and 3 of Table 4 are met for each individual item and each *package*, respectively.

- (e) For transport by post, the total activity in each *excepted package* shall not exceed one tenth of the relevant limits specified in column 3 of Table 4.
- (f) If the *package* contains *fissile material*, one of the provisions of Regulation 20(1) (a)–(f) shall apply.

22(4). *Radioactive material* in forms other than as specified in Regulation 22(3) and with an activity not exceeding the limits specified in column 4 of Table 4 may be classified under

UN 2910, RADIOACTIVE MATERIAL, EXCEPTED PACKAGE — LIMITED QUANTITY OF MATERIAL,

provided that:

- (a) The *package* retains its *radioactive contents* under routine conditions of transport.
- (b) The *package* bears the mark “RADIOACTIVE” on either:
 - (i) An internal surface in such a manner that a warning of the presence of *radioactive material* is visible on opening the *package*; or
 - (ii) The outside of the *package*, where it is impractical to mark an internal surface.
- (c) For transport by post, the total activity in each *excepted package* shall not exceed one tenth of the relevant limits specified in column 4 of Table 4.
- (d) If the *package* contains *fissile material*, one of the provisions of Regulation 20(1)(a)–(f) shall apply.

22(5). Uranium hexafluoride not exceeding the limits specified in column 4 of Table 4 may be classified under

UN 3507 URANIUM HEXAFLUORIDE, RADIOACTIVE MATERIAL, EXCEPTED PACKAGE, less than 0.1 kg per *package*, non-fissile or fissile-excepted,

provided that:

- (a) The mass of uranium hexafluoride in the *package* is less than 0.1 kg.
- (b) The conditions of Regulation 21(2), 22(4)(a) and 22(4)(b) are met.

	<p>22(6).Articles manufactured of <i>natural uranium, depleted uranium</i> or natural thorium and articles in which the sole <i>radioactive material</i> is unirradiated <i>natural uranium</i>, unirradiated <i>depleted uranium</i> or unirradiated natural thorium may be classified under</p> <p>UN 2909, RADIOACTIVE MATERIAL, EXCEPTED PACKAGE — ARTICLES MANUFACTURED FROM NATURAL URANIUM or DEPLETED URANIUM or NATURAL THORIUM,</p> <p>provided that the outer surface of the <i>uranium</i> or thorium is enclosed in an inactive sheath made of metal or some other substantial material.</p> <p>22(7).An empty <i>packaging</i> that had previously contained <i>radioactive material</i> may be classified under</p> <p>UN 2908, RADIOACTIVE MATERIAL, EXCEPTED PACKAGE — EMPTY PACKAGING,</p> <p>provided that:</p> <ul style="list-style-type: none"> (a) It is in a well-maintained condition and securely closed. (b) The outer surface of any <i>uranium</i> or thorium in its structure is covered with an inactive sheath made of metal or some other substantial material. (c) The level of internal <i>non-fixed contamination</i> does not exceed 100 times the levels specified in Regulation 30(1). (d) Any labels that may have been displayed on it in conformity with Regulation 38(1) are no longer visible. (e) If the <i>packaging</i> has contained <i>fissile material</i>, one of the provisions of Regulation 20(1)(a)–(f) or one of the provisions for exclusion in the definition of <i>fissile material</i> shall apply.
<p>Type A Package.</p>	<p>23(1). <i>Packages</i> containing <i>radioactive material</i> may be classified as <i>Type A packages</i> provided that the conditions of Regulation 23(2) and 23(3) are met.</p> <p>23(2).<i>Type A packages</i> shall not contain activities greater than either of the following:</p>

	<p>(a) For <i>special form radioactive material</i> — $A1$; (b) For all other <i>radioactive material</i> — $A2$.</p> <p>23(3).For mixtures of radionuclides whose identities and respective activities are known, the following condition shall apply to the <i>radioactive contents</i> of a <i>Type A package</i>:</p> $\sum_i \frac{B(i)}{A1(i)} + \sum_j \frac{C(j)}{A2(j)} \leq 1$ <p>where:</p> <p>$B(i)$ is the activity of radionuclide i as <i>special form radioactive material</i>; $A1(i)$ is the $A1$ value for radionuclide i; $C(j)$ is the activity of radionuclide j as other than <i>special form radioactive material</i>; $A2(j)$ is the $A2$ value for radionuclide j.</p>
<p>Type B(U), Type B(M) Or Type C Package.</p>	<p>24(1).<i>Type B(U), Type B(M) and Type C packages</i> shall be classified in accordance with the <i>competent authority</i> certificate of <i>approval</i> for the <i>package design</i> issued by the country of origin of <i>design</i>.</p> <p>24(2).The contents of a <i>Type B(U), Type B(M) or Type C package</i> shall be as specified in the certificate of <i>approval</i>.</p> <p>24(3).<i>Type B(U) and Type B(M) packages</i>, if transported by air, shall meet the requirements of Regulation 24(2) and shall not contain activities greater than the following:</p> <p>(a) For <i>low dispersible radioactive material</i> — as authorized for the <i>package design</i> as specified in the certificate of <i>approval</i>; (b) For <i>special form radioactive material</i> — $3000A1$ or $105A2$, whichever is the lower; (c) For all other <i>radioactive material</i> — $3000A2$.</p>
<p>Special Arrangement</p>	<p>434. 25.<i>Radioactive material</i> shall be classified as transported under <i>special arrangement</i> when it is intended to be carried in accordance with Regulation 11.</p>

SECTION V: PART V: REQUIREMENTS AND CONTROLS FOR TRANSPORT

	<p>SECTION V: PART V: REQUIREMENTS AND CONTROLS FOR TRANSPORT</p>
<p>Before The First Shipment</p>	<p>26. Before a <i>packaging</i> is first used to transport <i>radioactive material</i>, it shall be confirmed that it has been manufactured in conformity with the <i>design</i> specifications to ensure compliance with the relevant provisions of these Regulations and any applicable certificate of <i>approval</i>. The following requirements shall also be fulfilled, if applicable:</p> <p>(a) If the <i>design</i> pressure of the <i>containment system</i> exceeds 35 kPa (gauge), it shall be ensured that the <i>containment system</i> of each <i>packaging</i> conforms to the approved <i>design</i> requirements relating to the capability of that system to maintain its integrity under that pressure.</p> <p>(b) For each <i>packaging</i> intended for use as a <i>Type B(U)</i>, <i>Type B(M)</i> or <i>Type C package</i> and for each <i>packaging</i> intended to contain <i>fissile material</i>, it shall be ensured that the effectiveness of its shielding and containment and, where necessary, the heat transfer characteristics and the effectiveness of the <i>confinement system</i>, are within the limits applicable to or specified for the approved <i>design</i>.</p> <p>(c) For each <i>packaging</i> intended to contain <i>fissile material</i>, it shall be ensured that the effectiveness of the criticality safety features is within the limits applicable to or specified for the <i>design</i>, and in particular where, in order to comply with the requirements of Regulation 68(1) neutron poisons are specifically included, checks shall be performed to confirm the presence and distribution of those neutron poisons.</p>
<p>Before Each Shipment</p>	<p>27(1). Before each <i>shipment</i> of any <i>package</i>, it shall be ensured that the <i>package</i> contains neither:</p> <p>(a) Radionuclides different from those specified for the <i>package design</i>; nor</p> <p>(b) Contents in a form, or physical or chemical state, different from those specified for the <i>package design</i>.</p> <p>27(2). Before each <i>shipment</i> of any <i>package</i>, it shall be ensured that all the requirements specified in the relevant provisions of these Regulations and in the applicable</p>

	<p>certificates of <i>approval</i> have been fulfilled. The following requirements shall also be fulfilled, if applicable:</p> <p>(a) It shall be ensured that lifting attachments that do not meet the requirements of Regulation 58(2) have been removed or otherwise rendered incapable of being used for lifting the <i>package</i>, in accordance with Regulation 58(3).</p> <p>(b) Each <i>Type B(U)</i>, <i>Type B(M)</i> and <i>Type C package</i> shall be held until equilibrium conditions have been approached closely enough to demonstrate compliance with the requirements for temperature and pressure, unless an exemption from these requirements has received <i>unilateral approval</i>.</p> <p>(c) For each <i>Type B(U)</i>, <i>Type B(M)</i> and <i>Type C package</i>, it shall be ensured by inspection and/or appropriate tests that all closures, valves and other openings of the <i>containment system</i> through which the <i>radioactive contents</i> might escape are properly closed and, where appropriate, sealed in the manner for which the demonstrations of compliance with the requirements of Regulations 65(8) and 67(3) were made.</p> <p>(d) For <i>packages</i> containing <i>fissile material</i>, the measurement specified in Regulation 69(2)(b) and the tests to demonstrate closure of each <i>package</i> as specified in Regulation 71(1) shall be performed.</p> <p>(e) For <i>packages</i> intended to be used for <i>shipment</i> after storage, it shall be ensured that all <i>packaging</i> components and <i>radioactive contents</i> have been maintained during storage in a manner such that all the requirements specified in the relevant provisions of these Regulations and in the applicable certificates of <i>approval</i> have been fulfilled.</p>
<p>Transport Of [With] Other Goods</p>	<p>28(1).A <i>package</i> shall not contain any items other than those that are necessary for the use of the <i>radioactive material</i>. The interaction between these items and the <i>package</i>, under the conditions of transport applicable to the <i>design</i>, shall not reduce the safety of the <i>package</i>.</p> <p>28(2).<i>Freight containers, IBCs, tanks, as well as other packagings and overpacks, used for the transport of radioactive material shall not be used for the storage or</i></p>

	<p>transport of other goods unless decontaminated below the level of 0.4Bq/cm² for beta and gamma emitters and <i>low toxicity alpha emitters</i> and 0.04Bq/cm² for all other alpha emitters.</p> <p>28(3).<i>Consignments</i> shall be segregated from other dangerous goods during transport in compliance with the relevant transport regulations for dangerous goods of each of the countries <i>through or into</i> which the materials will be transported, and, where applicable, with the regulations of the cognizant transport organizations, as well as these Regulations.</p>
<p>Other Dangerous Properties Of Contents</p>	<p>29. In addition to the radioactive and fissile properties, any other dangerous properties of the contents of the <i>package</i>, such as explosiveness, flammability, pyrophoricity, chemical toxicity and corrosiveness, shall be taken into account in the packing, labeling, marking, placarding, storage and transport in order to be in compliance with the relevant transport regulations for dangerous goods of each of the countries <i>through or into</i> which the materials will be transported, and, where applicable, with the regulations of the cognizant transport organizations, as well as these Regulations.</p>
<p>Contamination And Leaking Packages</p>	<p>30(1).The <i>non-fixed contamination</i> on the external surfaces of any <i>package</i> shall be kept as low as practicable and, under routine conditions of transport, shall not exceed the following limits:</p> <ul style="list-style-type: none"> (a) 4Bq/cm² for beta and gamma emitters and <i>low toxicity alpha emitters</i>; (b) 0.4Bq/cm² for all other alpha emitters. <p>These limits are applicable when averaged over any area of 300cm² of any part of the surface.</p> <p>30(2). Except as provided in Regulation 30(7), the level of <i>non-fixed contamination</i> on the external and internal surfaces of <i>overpacks, freight containers and conveyances</i> shall not exceed the limits specified in Regulation 30(1). This requirement does not apply to the internal surfaces of <i>freight containers</i> being used as <i>packagings</i>, either loaded or empty.</p> <p>30(3).If it is evident that a <i>package</i> is damaged or</p>

leaking, or if it is suspected that the *package* may have leaked or been damaged, access to the *package* shall be restricted and a qualified person shall, as soon as possible, assess the extent of *contamination* and the resultant *dose rate* of the *package*. The scope of the assessment shall include the *package*, the *conveyance*, the adjacent loading and unloading areas and, if necessary, all other material that has been carried in the *conveyance*. When necessary, additional steps for the protection of people, property and the environment, in accordance with provisions established by the relevant *competent authority*, shall be taken to overcome and minimize the consequences of such leakage or damage.

30(4). *Packages* that are damaged or leaking *radioactive contents* in excess of allowable limits for normal conditions of transport may be removed to an acceptable interim location under supervision, but shall not be forwarded until repaired or reconditioned and decontaminated.

30(5). A *conveyance* and equipment used regularly for the transport of *radioactive material* shall be periodically checked to determine the level of *contamination*. The frequency of such checks shall be related to the likelihood of *contamination* and the extent to which *radioactive material* is transported.

(6). Except as provided in Regulation 30(7) any *conveyance*, or equipment or part thereof that has become contaminated above the limits specified in Regulation 30(1). in the course of the transport of *radioactive material*, or that shows a *dose rate* in excess of 5 $\mu\text{Sv/h}$ at the surface, shall be decontaminated as soon as possible by a qualified person and shall not be reused unless the following conditions are fulfilled:

- (a) The *non-fixed contamination* shall not exceed the limits specified in Regulation 30(1).
- (b) The *dose rate* resulting from the *fixed contamination* shall not exceed 5 $\mu\text{Sv/h}$ at the surface.

30(7). A *freight container* or *conveyance* dedicated to the transport of unpackaged *radioactive material* under *exclusive use* shall be excepted from the requirements of

	<p>Regulation 30(2) and 30(6) solely with regard to its internal surfaces and only for as long as it remains under that specific <i>exclusive use</i>.</p>
<p>Transport of Excepted Packages</p>	<p>31(1). <i>Excepted packages</i> shall be subject only to the following provisions in Sections V and VI:</p> <p>(a) The requirements specified in Regulations 27(2)–28(2), 29–30(6), 31(2), 37(1)–37(4); 40(1), 40(2).introductory sentence; 40(2)(a); 40(2) (j)(i) and (ii); 40(2)(k); 40(2)(m); 41(4).– 41(7); 42(2), 42(3), 44; 46(1), 47(3). 52 and 53;</p> <p>(b) The requirements for <i>excepted packages</i> specified in Regulation 60;</p> <p>(c) The requirements specified in Regulation 51(1) and 51(2) if transported by post.</p> <p>All relevant provisions of the other sections shall apply to <i>excepted packages</i>.</p> <p>31(2).The <i>dose rate</i> at any point on the external surface of an <i>excepted package</i> shall not exceed 5 $\mu\text{Sv/h}$.</p>
<p>Transport Of LSA Material And SCO In Industrial Packages Or Unpackaged</p>	<p>32(1).The quantity of <i>LSA material</i> or <i>SCO</i> in a single <i>Type IP-1, Type IP-2, Type IP-3 package</i>, or object or collection of objects, whichever is appropriate, shall be so restricted that the external <i>dose rate</i> at 3m from the unshielded material or object or collection of objects does not exceed 10 mSv/h.</p> <p>32(2).For <i>LSA material</i> and <i>SCO</i> that are or contain <i>fissile material</i> that is not excepted under Regulation 20(1) the applicable requirements of Regulation 47(1) and 47(2) shall be met.</p> <p>32(3).For <i>LSA material</i> and <i>SCO</i> that are, or contain, <i>fissile material</i>, the applicable requirements of Regulation 68(1) shall be met.</p> <p>32(4). <i>LSA material</i> and <i>SCO</i> in groups <i>LSA-I, SCO-I</i> and <i>SCO-III</i> may be transported, unpackaged, under the following conditions:</p> <p>(a) All unpackaged material other than ores containing only naturally occurring radionuclides shall be</p>

transported in such a manner that under routine conditions of transport there will be no escape of the *radioactive contents* from the *conveyance* nor will there be any loss of shielding.

- (b) Each *conveyance* shall be under *exclusive use*, except when only transporting *SCO-I* on which the *contamination* on the accessible and the inaccessible surfaces is not greater than 10 times the applicable level specified in the definition of *Contamination*.
- (c) For *SCO-I* where it is suspected that *non-fixed contamination* exists on inaccessible surfaces in excess of the values specified in Regulation 17(2)(a)(i), measures shall be taken to ensure that the *radioactive material* is not released into the *conveyance*.
- (d) Unpackaged *fissile material* shall meet the requirement of Regulation 20(1)(e).
- (e) For *SCO-III*;
 - (i) Transport shall be under *exclusive use* by road, rail, inland waterway or sea.
 - (ii) Stacking shall not be permitted.
 - (iii) All activities associated with the *shipment*, including radiation protection, emergency response and any special precautions or special administrative or operational controls that are to be employed during transport shall be described in a transport plan. The transport plan shall demonstrate that the overall level of safety in transport is at least equivalent to that which would be provided if the requirements of Regulation 64(14) (only for the test specified in Regulation 84(5) preceded by the tests specified in Regulation 84(2) and 84(3) had been met.
 - (iv) The requirements of Regulation 61(2) for a *Type IP-2 package* shall be satisfied, except that the maximum damage referred to in Regulation 84(4) may be determined based on provisions in the transport plan, and the requirements of Regulation 84(5) are not applicable.
 - (v) The object and any shielding are secured to the *conveyance* in accordance with Regulation 58(1).
 - (vi) The *shipment* shall be subject to *multilateral approval*.

32(5).*LSA material* and *SCO*, except as otherwise

	<p>specified in Regulation 32(4) shall be packaged in accordance with Table 5.</p> <p>32(6).The total activity in a single hold or compartment of an inland waterway craft, or in another <i>conveyance</i>, for carriage of <i>LSA material</i> or <i>SCO</i> in a <i>Type IP-1, Type IP-2, Type IP-3 package</i> or unpackaged, shall not exceed the limits shown in Table 6. For <i>SCO-III</i>, the limits in Table 6 may be exceeded provided that the transport plan contains precautions which are to be employed during transport to obtain an overall level of safety at least equivalent to that which would be provided if the limits had been applied.</p>
<p>Determination Of Transport Index (TI)</p>	<p>33(1).The <i>TI</i> for a <i>package, overpack or freight container</i>, or for unpackaged <i>LSA-I, SCO-I</i> or <i>SCO-III</i>, shall be the number derived in accordance with the following procedure:</p> <p>(a) Determine the maximum <i>dose rate</i> in units of millisieverts per hour (mSv/h) at a distance of 1 m from the external surfaces of the <i>package, overpack, freight container</i> or unpackaged <i>LSA-I, SCO-I</i> and <i>SCO-III</i>. The value determined shall be multiplied by 100. For <i>uranium</i> and thorium ores and their concentrates, the maximum <i>dose rate</i> at any point 1 m from the external surface of the load may be taken as:</p> <ul style="list-style-type: none"> (i) 0.4mSv/h for ores and physical concentrates of <i>uranium</i> and thorium; (ii) 0.3mSv/h for chemical concentrates of thorium; (iii) 0.02mSv/h for chemical concentrates of <i>uranium</i>, other than uranium hexafluoride. <p>(b) For <i>tanks, freight containers</i> and unpackaged <i>LSA-I, SCO-I</i> and <i>SCO-III</i>, the value determined in step (a) shall be multiplied by the appropriate factor from Table 7.</p> <p>(c) The value obtained in steps (a) and (b) shall be rounded up to the first decimal place (for example, 1.13 becomes 1.2), except that a value of 0.05 or less may be considered as zero and the resulting number is the <i>TI</i> value.</p> <p>33(2).The <i>TI</i> for each rigid <i>overpack, freight container</i> or <i>conveyance</i> shall be determined as the sum of the <i>TIs</i> of</p>

	<p>all the <i>packages</i> contained therein. For a <i>shipment</i> from a single <i>consignor</i>, the <i>consignor</i> may determine the <i>TI</i> by direct measurement of <i>dose rate</i>.</p> <p>33(3).The <i>TI</i> for a non-rigid <i>overpack</i> shall be determined only as the sum of the <i>TIs</i> of all the <i>packages</i> within the <i>overpack</i>.</p>
Determination Of Criticality Safety Index (CSI) For Consignments, Freight Containers And Overpacks	<p>34.The <i>CSI</i> for each <i>overpack</i> or <i>freight container</i> shall be determined as the sum of the <i>CSIs</i> of all the <i>packages</i> contained. The same procedure shall be followed for determining the total sum of the <i>CSIs</i> in a <i>consignment</i> or aboard a <i>conveyance</i>.</p>
Limits On Transport Index, Criticality Safety Index And Dose Rates For Packages And Overpacks	<p>35(1).Except for <i>consignments</i> under <i>exclusive use</i>, the <i>TI</i> of any <i>package</i> or <i>overpack</i> shall not exceed 10, nor shall the <i>CSI</i> of any <i>package</i> or <i>overpack</i> exceed 50.</p> <p>35(2).Except for <i>packages</i> or <i>overpacks</i> transported under <i>exclusive use</i> by rail or by road under the conditions specified in Regulation 48(3)(a) or under <i>exclusive use</i> and <i>special arrangement</i> by <i>vessel</i> or by air under the conditions specified in Regulation 49(1) or Regulation 50(3) respectively, the maximum <i>dose rate</i> at any point on the external surface of a <i>package</i> or <i>overpack</i> shall not exceed 2 mSv/h.</p> <p>35(3).The maximum <i>dose rate</i> at any point on the external surface of a <i>package</i> or <i>overpack</i> under <i>exclusive use</i> shall not exceed 10 mSv/h.</p>
Categories	<p>36. <i>Packages</i>, <i>overpacks</i> and <i>freight containers</i> shall be assigned to either category I-WHITE, II-YELLOW or III-YELLOW in accordance with the conditions specified in Table 8 and with the following requirements:</p> <p>(a) For a <i>package</i>, <i>overpack</i> or <i>freight container</i>, the <i>TI</i> and the surface <i>dose rate</i> conditions shall be taken into account in determining which category is appropriate. Where the <i>TI</i> satisfies the condition for one category but the surface <i>dose rate</i> satisfies the</p>

	<p>condition for a different category, the <i>package</i>, <i>overpack</i> or <i>freight container</i> shall be assigned to the higher category. For this purpose, category I-WHITE shall be regarded as the lowest category.</p> <p>(b) The <i>TI</i> shall be determined following the procedures specified in Regulation 33(1), 33(2) and 33(3).</p> <p>(c) If the surface <i>dose rate</i> is greater than 2mSv/h, the <i>package</i> or <i>overpack</i> shall be transported under <i>exclusive use</i> and under the provisions of Regulation 48(3)(a), 49(1) or 50(3) as appropriate.</p> <p>(d) A <i>package</i> transported under a <i>special arrangement</i> shall be assigned to category III-YELLOW except under the provisions of Regulation 37(1).</p> <p>(e) An <i>overpack</i> or <i>freight container</i> that contains <i>packages</i> transported under <i>special arrangement</i> shall be assigned to category III-YELLOW except under the provisions of Regulation 37(1).</p>
Marking,	<p>37(1).For each <i>package</i> or <i>overpack</i>, the UN number and proper shipping name shall be determined (see Table 1). In all cases of international transport of <i>packages</i> requiring <i>competent authority approval</i> of <i>design</i> or <i>shipment</i>, for which different <i>approval</i> types apply in the different countries concerned by the <i>shipment</i>, the UN number, proper shipping name, categorization, labelling and marking shall be in accordance with the certificate of the country of origin of <i>design</i>.</p> <p>37(2).Each <i>package</i> shall be legibly and durably marked on the outside of the <i>packaging</i> with an identification of either the <i>consignor</i> or <i>consignee</i>, or both. Each <i>overpack</i> shall be legibly and durably marked on the outside of the <i>overpack</i> with an identification of either the <i>consignor</i> or <i>consignee</i>, or both, unless these marks of all the <i>packages</i> within the <i>overpack</i> are clearly visible.</p> <p>37(3). Each <i>package</i> shall be legibly and durably marked on the outside with the UN marks as specified in Table 9. Additionally, each <i>overpack</i> shall be legibly and durably marked with the word “OVERPACK” and the UN marks as specified in Table 9, unless all the marks of the <i>packages</i> within the <i>overpack</i> are clearly visible.</p> <p>37(4).Each <i>package</i> of gross mass exceeding 50 kg shall have its permissible gross mass legibly and durably</p>

marked on the outside of the *packaging*.

37(5).Each *package* that conforms to:

- (a) An *IP-1*, *IP-2* or *IP-3 design* shall be legibly and durably marked on the outside of the *packaging* with “TYPE IP-1”, “TYPE IP-2” or “TYPE IP-3”, as appropriate.
- (b) A *Type A package design* shall be legibly and durably marked on the outside of the *packaging* with “TYPE A”.
- (c) An *IP-2*, *IP-3* or a *Type A package design* shall be legibly and durably marked on the outside of the *packaging* with the international *vehicle* registration code (VRI code) of the country of origin of *design* and either the name of the manufacturer or other identification of the *packaging* specified by the *competent authority* of the country of origin of *design*.

37(6).Each *package* that conforms to a *design* approved under one or more of Regulation 93–96(3) and 109(2) shall be legibly and durably marked on the outside of the *packaging* with the following information:

- (a) The identification mark allocated to that *design* by the *competent authority*;
- (b) A serial number to uniquely identify each *packaging* that conforms to that *design*;
- (c) “TYPE B(U)”, “TYPE B(M)” or “TYPE C”, in the case of a *Type B(U)*, *Type B(M)* or *Type C package design*.

37(7).Each *package* that conforms to a *Type B(U)*, *Type B(M)* or *Type C package design* shall have the outside of the outermost receptacle, that is resistant to the effects of fire and water, plainly marked by embossing, stamping or other means resistant to the effects of fire and water with the trefoil symbol shown in Fig. 1.

37(8).Any mark on the *package* made in accordance with the requirements of Regulation 37(5)(a),(b) and 37(6)(c) relating to the *package* type that does not relate to the UN number and proper shipping name assigned to the *consignment* shall be removed or covered.

	<p>37(9).Where <i>LSA-I</i> or <i>SCO-I</i> material is contained in receptacles or wrapping materials and is transported under <i>exclusive use</i>, as permitted by Regulation 32(4) the outer surface of these receptacles or wrapping materials may bear the mark “RADIOACTIVE LSA-I” or “RADIOACTIVE SCO-I”, as appropriate.</p>
Labeling	<p>38(1).Each <i>package</i>, <i>overpack</i> and <i>freight container</i> shall bear the labels conforming to the applicable models in Figs 2–4, except as allowed under the alternative provisions of Regulation 39(1) for <i>large freight containers</i> and <i>tanks</i>, according to the appropriate category. In addition, each <i>package</i>, <i>overpack</i> and <i>freight container</i> containing <i>fissile material</i>, other than <i>fissile material</i> excepted under the provisions of Regulation 20(1) shall bear labels conforming to the model in Fig. 5. Any labels that do not relate to the contents shall be removed or covered. For <i>radioactive material</i> having other dangerous properties, see Regulation 29.</p> <p>38(2).The labels conforming to the applicable models in Figs 2–4 shall be affixed to two opposite sides of the outside of a <i>package</i> or <i>overpack</i> or on the outside of all four sides of a <i>freight container</i> or <i>tank</i>. The labels conforming to the model in Fig. 5, where applicable, shall be affixed adjacent to the labels conforming to the applicable models in Figs 2–4. The labels shall not cover the marks specified in Regulation 37(2) – 37(7).</p> <p>38(3).Each label conforming to the applicable models in Figs 2–4 shall be completed with the following information:</p> <p>(a) Contents:</p> <p>(i) Except for <i>LSA-I material</i>, the name(s) of the radionuclide(s) as taken from Table 2, using the symbols prescribed therein. For mixtures of radionuclides, the most restrictive nuclides must be listed to the extent the space on the line permits. The group of <i>LSA</i> or <i>SCO</i> shall be shown following the name(s) of the radionuclide(s). The terms <i>LSA-II</i>, <i>LSA-III</i>, <i>SCO-I</i> and <i>SCO-II</i> shall be used for this purpose.</p>

	<p>(ii) For <i>LSA-I material</i>, the term <i>LSA-I</i> is all that is necessary; the name of the radionuclide is not necessary.</p> <p>(b) Activity: The maximum activity of the <i>radioactive contents</i> during transport expressed in units of becquerels (Bq) with the appropriate SI prefix symbol (see Annex II). For <i>fissile material</i>, the total mass of <i>fissile nuclides</i> in units of grams (g), or multiples thereof, may be used in place of activity.</p> <p>(c) For <i>overpacks</i> and <i>freight containers</i>, the “contents” and “activity” entries on the label shall bear the information required in 38(3)(a) and (b), respectively, totalled together for the entire contents of the <i>overpack</i> or <i>freight container</i> except that on labels for <i>overpacks</i> or <i>freight containers</i> containing mixed loads of <i>packages</i> containing different radionuclides, such entries may read “See Transport Documents”.</p> <p>(d) <i>TI</i>: The number determined in accordance with Regulation 33(1). (2) and (3) (except for category I-WHITE).</p> <p>38(4). Each label conforming to the model in Fig. 5 shall be completed with the <i>CSI</i> as stated in the certificate of <i>approval</i> applicable in the countries <i>through or into</i> which the <i>consignment</i> is transported and issued by the <i>competent authority</i> or as specified in Regulation 68(2) or 68(3).</p> <p>38(5). For <i>overpacks</i> and <i>freight containers</i>, the label conforming to the model in Fig. 5 shall bear the sum of the <i>CSIs</i> of all the <i>packages</i> contained therein</p>
Placarding	<p>39(1). <i>Large freight containers</i> carrying unpackaged <i>LSA-I material</i> or <i>SCO-I</i> or <i>packages</i> other than <i>excepted packages</i>, and <i>tanks</i> shall bear four placards that conform to the model given in Fig. 6. The placards shall be affixed in a vertical orientation to each side wall and to each end wall of the <i>large freight container</i> or <i>tank</i>. Any placards that do not relate to the contents shall be removed. Instead of using both labels and placards, it is permitted, as an alternative, to use enlarged labels only, where appropriate, as shown in Figs 2–4, except having the</p>

	<p>minimum size shown in Fig. 6.</p> <p>39(2). Where the <i>consignment</i> in the <i>freight container</i> or <i>tank</i> is unpackaged <i>LSA-I</i> or <i>SCO-I</i> or where a <i>consignment</i> in a <i>freight container</i> is required to be shipped under <i>exclusive use</i> and is packaged <i>radioactive material</i> with a single UN number, the appropriate UN number for the <i>consignment</i> (see Table 1) shall also be displayed, in black digits not less than 65mm high, either:</p> <p>(a) In the lower half of the placard shown in Fig. 6 and against the white background; or</p> <p>(b) On the placard shown in Fig. 7.</p> <p>When the alternative given in (b) is used, the subsidiary placard shall be affixed immediately adjacent to the main placard shown in Fig. 6, on all four sides of the <i>freight container</i> or <i>tank</i>.</p>
	<p style="text-align: center;">CONSIGNOR'S RESPONSIBILITIES</p>
<p>Particulars of consignment</p>	<p>40(1). Except as otherwise provided in these Regulations, no person may offer <i>radioactive material</i> for transport unless it is properly marked, labelled, placarded, described and certified on a transport document, and otherwise in a condition for transport as required by these Regulations.</p> <p>40(2).The <i>consignor</i> shall include in the transport documents with each <i>consignment</i> the identification of the <i>consignor</i> and <i>consignee</i>, including their names and addresses, and the following information, as applicable, in the order given:</p> <p>(a) The UN number assigned to the material as specified in accordance with the provisions of Regulation 13 and 37(1) preceded by the letters "UN".</p> <p>(b) The proper shipping name, as specified in accordance with the provisions of Regulation 13 and 37(1).</p> <p>(c) The UN dangerous goods class number "7".</p> <p>(d) The subsidiary hazard class or division number(s) corresponding to the subsidiary hazard label(s) required to be applied, when assigned, shall be</p>

entered following the primary hazard class or division and shall be enclosed in parentheses.

- (e) The name or symbol of each radionuclide or, for mixtures of radionuclides, an appropriate general description or a list of the most restrictive nuclides.
- (f) A description of the physical and chemical form of the material, or a notation that the material is *special form radioactive material* or *low dispersible radioactive material*. A generic chemical description is acceptable for chemical form.
- (g) The maximum activity of the *radioactive contents* during transport expressed in units of becquerels (Bq) with the appropriate SI prefix symbol (see Annex II). For *fissile material*, the mass of *fissile material* (or mass of each *fissile nuclide* for mixtures, when appropriate) in units of grams (g), or appropriate multiples thereof, may be used in place of activity.
- (h) The category of the *package, overpack or freight container*, as assigned per Regulation 36, i.e. I-WHITE, II-YELLOW, III-YELLOW.
- (i) The *TI* as determined per Regulation 33(1), 33(2) and 33(3), (except for category I-WHITE).
- (j) For *fissile material*:
 - (i) Shipped under one exception of Regulation 20(1)(a)–(f), reference to that paragraph;
 - (ii) Shipped under Regulation 20(1)(c)–(e) the total mass of *fissile nuclides*;
 - (iii) Contained in a *package* for which one of Regulation 68(2)(a)–(c) or 68(3) is applied, reference to that paragraph;
 - (iv) The *CSI*, where applicable.
- (k) The identification mark for each *competent authority certificate of approval (special form radioactive material, low dispersible radioactive material, fissile material excepted under Regulation 20(1)(f) special arrangement, package design or shipment)* applicable to the *consignment*.
- (l) For *consignments* of more than one *package*, the information contained in Regulation 40(2)(a)–(k) shall be given for each *package*. For *packages* in an *overpack, freight container or conveyance*, a detailed statement of the contents of each *package* within the *overpack, freight container or conveyance* and, where appropriate, of each *overpack, freight*

	<p><i>container</i> or <i>conveyance</i> shall be included. If <i>packages</i> are to be removed from the <i>overpack</i>, <i>freight container</i> or <i>conveyance</i> at a point of intermediate unloading, appropriate transport documents shall be made available.</p> <p>(m) Where a <i>consignment</i> is required to be shipped under <i>exclusive use</i>, the statement “EXCLUSIVE USE SHIPMENT”.</p> <p>(n) For <i>LSA-II</i>, <i>LSA-III</i>, <i>SCO-I</i>, <i>SCO-II</i> and <i>SCO-III</i>, the total activity of the <i>consignment</i> as a multiple of A2. For <i>radioactive material</i> for which the A2 value is unlimited, the multiple of A2 shall be zero.</p>
<p>Consignor’s Certification or Declaration</p>	<p>41(1).The <i>consignor</i> shall include in the transport documents a certification or declaration in the following terms:</p> <p><i>“I hereby declare that the contents of this consignment are fully and accurately described above by the proper shipping name and are classified, packaged, marked and labeled/placarded, and are in all respects in proper condition for transport according to applicable international and national governmental regulations.”</i></p> <p>41(2).If the intent of the declaration is already a condition of transport within a particular international convention, the <i>consignor</i> need not provide a declaration for that part of the transport covered by the convention.</p> <p>41(3).The declaration shall be signed and dated by the <i>consignor</i>. Facsimile signatures are acceptable where applicable laws and regulations recognize the legal validity of facsimile signatures.</p> <p>41(4).If the dangerous goods documentation is presented to the <i>carrier</i> by means of electronic data processing or electronic data interchange transmission techniques, the signature(s) may be replaced by the name(s) (in capitals) of the person authorized to sign.</p> <p>41(5).When <i>radioactive material</i>, other than when carried in <i>tanks</i>, is packed or loaded into any <i>freight container</i> or <i>vehicle</i> that will be transported by sea, those responsible for packing the container or <i>vehicle</i> shall provide a container/<i>vehicle</i> packing certificate specifying</p>

	<p>the container/<i>vehicle</i> identification number(s) and certifying that the operation has been carried out in accordance with the applicable conditions of the International Maritime Dangerous Goods (IMDG) Code</p> <p>41(6).The information required in the transport documents and the container/<i>vehicle</i> packing certificate may be incorporated into a single document, if not, the documents shall be attached. If the information is incorporated into a single document, the document shall include a signed declaration such as:</p> <p style="text-align: center;"><i>“It is declared that the packing of the goods into the container/<i>vehicle</i> has been carried out in accordance with the applicable provisions”.</i></p> <p>This declaration shall be dated and the person signing it shall be identified on the document. Facsimile signatures are acceptable where applicable laws and regulations recognize the legal validity of facsimile signatures.</p> <p>41(7). The declaration shall be made on the same transport document that contains the particulars of <i>consignment</i> listed in Regulation 40(2).</p>
<p>Information for Carriers</p>	<p>42(1).The <i>consignor</i> shall provide in the transport documents a statement regarding actions, if any, that are required to be taken by the <i>carrier</i>. The statement shall be in the languages deemed necessary by the <i>carrier</i> or the authorities concerned and shall include at least the following points:</p> <ul style="list-style-type: none"> (a) Supplementary requirements for loading, stowage, carriage, handling and unloading of the <i>package, overpack or freight container</i>, including any special stowage provisions for the safe dissipation of heat or a statement that no such requirements are necessary; (b) Restrictions on the mode of transport or <i>conveyance</i> and any necessary routeing instructions; (c) Emergency arrangements appropriate to the <i>consignment</i>. <p>42(2). The <i>consignor</i> shall retain a copy of each of the transport documents containing the information specified in Regulation 40(2), 41(1), 41(5), 41(6) and 42(1) as applicable, for a minimum period of three months.</p>

	<p>When the documents are kept electronically, the <i>consignor</i> shall be able to reproduce them in a printed form.</p> <p>42(3).The applicable <i>competent authority</i> certificates need not necessarily accompany the <i>consignment</i>. The <i>consignor</i> shall make the applicable certificates available to the <i>carrier(s)</i> before loading and unloading.</p>
<p>Notification of Competent Authorities</p>	<p>43(1).Before the first <i>shipment</i> of any <i>package</i> requiring <i>competent authority approval</i>, the <i>consignor</i> shall ensure that copies of each applicable <i>competent authority</i> certificate applying to that <i>package design</i> have been submitted to the <i>competent authority</i> of the country of origin of the <i>shipment</i> and to the <i>competent authority</i> of each country <i>through or into</i> which the <i>consignment</i> is to be transported. The <i>consignor</i> is not required to await an acknowledgement from the <i>competent authority</i>, nor is the <i>competent authority</i> required to make such acknowledgement of receipt of the certificate.</p> <p>43(2). For each <i>shipment</i> listed in (a), (b), (c) or (d) below, the <i>consignor</i> shall notify the <i>competent authority</i> of the country of origin of the <i>shipment</i> and the <i>competent authority</i> of each country <i>through or into</i> which the <i>consignment</i> is to be transported. This notification shall be in the possession of each <i>competent authority</i> prior to the commencement of the <i>shipment</i>, preferably at least 7 days in advance of the <i>shipment</i>. The <i>shipments</i> that require <i>consignor</i> notification include:</p> <ul style="list-style-type: none"> (a) <i>Type C packages</i> containing <i>radioactive material</i> with an activity greater than 3000A1 or 3000A2, as appropriate, or 1000 TBq, whichever is the lower; (b) <i>Type B(U) packages</i> containing <i>radioactive material</i> with an activity greater than 3000A1 or 3000A2, as appropriate, or 1000 TBq, whichever is the lower; (c) <i>Type B(M) packages</i>; (d) <i>Shipments</i> under <i>special arrangement</i>. <p>43(3).The <i>consignment</i> notification shall include:</p> <ul style="list-style-type: none"> (a) Sufficient information to enable the identification of the <i>package</i> or <i>packages</i>, including all applicable certificate numbers and identification marks.

	<p>(b) Information on the date of <i>shipment</i>, the expected date of arrival and the proposed routing.</p> <p>(c) The name(s) of the <i>radioactive material(s)</i> or nuclide(s).</p> <p>(d) Descriptions of the physical and chemical forms of the <i>radioactive material</i>, or whether it is <i>special form radioactive material</i> or <i>low dispersible radioactive material</i>.</p> <p>(e) The maximum activity of the <i>radioactive contents</i> during transport expressed in units of becquerels (Bq) with the appropriate SI prefix symbol (see Annex II). For <i>fissile material</i>, the mass of <i>fissile material</i> (or the mass of each <i>fissile nuclide</i> for a mixture, when appropriate) in units of grams (g), or multiples thereof, may be used in place of activity.</p> <p>43(4).The <i>consignor</i> is not required to send a separate notification if the required information has been included in the application for <i>approval of shipment</i> (see Regulation 99(3)).</p>
<p>Possession Of Certificates And Instructions</p>	<p>44.The <i>consignor</i> shall have in his/her possession a copy of each certificate required under Section VIII of these Regulations and a copy of the instructions with regard to the proper closing of the <i>package</i> and other preparations for <i>shipment</i> before making any <i>shipment</i> under the terms of the certificates.</p>
	<p>TRANSPORT AND STORAGE IN TRANSIT</p>
<p>Segregation During Transport And Storage In Transit</p>	<p>45(1).<i>Packages, overpacks and freight containers</i> containing <i>radioactive material</i> and unpackaged <i>radioactive material</i> shall be segregated during transport and during storage in transit:</p> <p>(a) From workers in regularly occupied working areas by distances calculated using a dose criterion of 5 mSv in a year and conservative model parameters;</p> <p>(b) From members of the public in areas where the public has regular access by distances calculated using a dose criterion of 1 mSv in a year and conservative model parameters;</p> <p>(c) From undeveloped photographic film by distances calculated using a radiation exposure criterion for</p>

	<p>undeveloped photographic film due to the transport of <i>radioactive material</i> of 0.1 mSv per <i>consignment</i> of such film;</p> <p>(d) From other dangerous goods in accordance with Regulation 28(3). .</p> <p>45(2).Category II-YELLOW or III-YELLOW <i>packages</i> or <i>overpacks</i> shall not be carried in compartments occupied by passengers, except those exclusively reserved for couriers specially authorized to accompany such <i>packages</i> or <i>overpacks</i>.</p>
<p>Stowage During Transport And Storage In Transit</p>	<p>46(1).<i>Consignments</i> shall be securely stowed.</p> <p>46(2).Provided that its average surface heat flux does not exceed 15 W/m² and that the immediate surrounding cargo is not in sacks or bags, a <i>package</i> or <i>overpack</i> may be carried or stored among packaged general cargo without any special stowage provisions except as may be specifically required by the <i>competent authority</i> in an applicable certificate of <i>approval</i>.</p> <p>46(2).Loading of <i>freight containers</i> and accumulation of <i>packages</i>, <i>overpacks</i> and <i>freight containers</i> shall be controlled as follows:</p> <p>(a) Except under the condition of <i>exclusive use</i>, and for <i>consignments</i> of <i>LSA-I material</i>, the total number of <i>packages</i>, <i>overpacks</i> and <i>freight containers</i> aboard a single <i>conveyance</i> shall be limited so that the sum of the <i>TIs</i> aboard the <i>conveyance</i> does not exceed the values shown in Table 10.</p> <p>(b) The <i>dose rate</i> under routine conditions of transport shall not exceed 2 mSv/h at any point on the external surface of the <i>vehicle</i> or <i>freight container</i>, and 0.1 mSv/h at 2 m from the external surface of the <i>vehicle</i> or <i>freight container</i>, except for <i>consignments</i> transported under <i>exclusive use</i> by road or rail for which the radiation limits around the <i>vehicle</i> are set forth in Regulation 48(3) (b) and (c).</p> <p>(c) The sum of the <i>CSIs</i> in a <i>freight container</i> and aboard a <i>conveyance</i> shall not exceed the values shown in Table 11.</p>

	<p>46(3).Any <i>package</i> or <i>overpack</i> having a <i>TI</i> greater than 10, or any <i>consignment</i> having a <i>CSI</i> greater than 50, shall be transported only under <i>exclusive use</i>.</p>
<p>Additional Requirements Relating To Transport And Storage In Transit Of Fissile Material</p>	<p>47(1).Any group of <i>packages</i>, <i>overpacks</i> and <i>freight containers</i> containing <i>fissile material</i> stored in transit in any one storage area shall be so limited that the sum of the <i>CSIs</i> in the group does not exceed 50. Each group shall be stored so as to maintain a spacing of at least 6 m from other such groups.</p> <p>47(2).Where the sum of the <i>CSIs</i> on board a <i>conveyance</i> or in a <i>freight container</i> exceeds 50, as permitted in Table 11, storage shall be such as to maintain a spacing of at least 6 m from other groups of <i>packages</i>, <i>overpacks</i> or <i>freight containers</i> containing <i>fissile material</i> or other <i>conveyances</i> carrying <i>radioactive material</i>.</p> <p>47(3).<i>Fissile material</i> meeting one of the provisions of Regulation 20(1)(a)–(f) shall meet the following requirements:</p> <ul style="list-style-type: none"> (a) Only one of the provisions (a)–(f) of Regulation 20(1). is allowed per <i>consignment</i>. (b) Only one approved <i>fissile material</i> in <i>packages</i> classified in accordance with Regulation 20(1)(f) is allowed per <i>consignment</i> unless multiple materials are authorized in the certificate of <i>approval</i>. (c) <i>Fissile material</i> in <i>packages</i> classified in accordance with Regulation 20(1)(c) shall be transported in a <i>consignment</i> with no more than 45 g of <i>fissile nuclides</i>. (d) <i>Fissile material</i> in <i>packages</i> classified in accordance with Regulation 20(1)(d) shall be transported in a <i>consignment</i> with no more than 15 g of <i>fissile nuclides</i>. (e) Unpackaged or packaged <i>fissile material</i> classified in accordance with Regulation 20(1)(e) shall be transported under <i>exclusive use</i> on a <i>conveyance</i> with no more than 45 g of <i>fissile nuclides</i>.
<p>Additional Requirements Relating To</p>	<p>48(1).<i>Vehicles</i> carrying <i>packages</i>, <i>overpacks</i> or <i>freight containers</i> labeled with any of the labels shown in Figs 2–5, or carrying unpackaged <i>LSA-I material</i>, <i>SCO-I</i> or</p>

<p>Transport By Rail And By Road</p>	<p><i>SCO-III</i>, shall display the placard shown in Fig. 6 on each of:</p> <ul style="list-style-type: none"> (a) The two external lateral walls in the case of a rail <i>vehicle</i>; (b) The two external lateral walls and the external rear wall in the case of a road <i>vehicle</i>. <p>In the case of a <i>vehicle</i> without sides, the placards may be affixed directly on the cargo carrying unit provided that they are readily visible. In the case of large <i>tanks</i> or <i>freight containers</i>, the placards on the <i>tanks</i> or <i>freight containers</i> shall suffice. In the case of <i>vehicles</i> that have insufficient area to allow the fixing of larger placards, the dimensions of the placard described in Fig. 6 may be reduced to 100 mm. Any placards that do not relate to the contents shall be removed.</p> <p>48(2).Where the <i>consignment</i> in or on the <i>vehicle</i> is unpackaged <i>LSA-I material</i>, <i>SCO-I</i> or <i>SCO-III</i>, or where a <i>consignment</i> is required to be shipped under <i>exclusive use</i> and is packaged <i>radioactive material</i> with a single UN number, the appropriate UN number (see Table 1) shall also be displayed, in black digits not less than 65 mm high, either:</p> <ul style="list-style-type: none"> (a) In the lower half of the placard shown in Fig. 6, against the white background; or (b) On the placard shown in Fig. 7. <p>When the alternative given in (b) is used, the subsidiary placard shall be affixed immediately adjacent to the main placard, either on the two external lateral walls in the case of a rail <i>vehicle</i> or on the two external lateral walls and the external rear wall in the case of a road <i>vehicle</i>.</p> <p>48(3).For <i>consignments</i> under <i>exclusive use</i>, the <i>dose rate</i> shall not exceed:</p> <ul style="list-style-type: none"> (a) 10 mSv/h at any point on the external surface of any <i>package</i> or <i>overpack</i>, and may only exceed 2 mSv/h provided that: <ul style="list-style-type: none"> (i) The <i>vehicle</i> is equipped with an enclosure that, during routine conditions of transport, prevents the access of unauthorized persons to the interior of the enclosure. (ii) Provisions are made to secure the <i>package</i> or
--	---

	<p><i>overpack</i> so that its position within the <i>vehicle</i> enclosure remains fixed during routine conditions of transport.</p> <p>(iii) There is no loading or unloading during the <i>shipment</i>.</p> <p>(b) 2 mSv/h at any point on the outer surfaces of the <i>vehicle</i>, including the upper and lower surfaces, or, in the case of an open <i>vehicle</i>, at any point on the vertical planes projected from the outer edges of the <i>vehicle</i>, on the upper surface of the load, and on the lower external surface of the <i>vehicle</i>.</p> <p>(c) 0.1 mSv/h at any point 2 m from the vertical planes represented by the outer lateral surfaces of the <i>vehicle</i>, or, if the load is transported in an open <i>vehicle</i>, at any point 2 m from the vertical planes projected from the outer edges of the <i>vehicle</i>.</p> <p>48(4). In the case of road <i>vehicles</i>, no persons other than the driver and assistants shall be permitted in <i>vehicles</i> carrying <i>packages</i>, <i>overpacks</i> or <i>freight containers</i> bearing category II-YELLOW or III-YELLOW labels.</p>
<p>Additional Requirements Relating To Transport By Vessels</p>	<p>49(1).<i>Packages</i> or <i>overpacks</i> having a surface <i>dose rate</i> greater than 2 mSv/h, unless being carried in or on a <i>vehicle</i> under <i>exclusive use</i> in accordance with Table 10, footnote (a), shall not be transported by <i>vessel</i> except under <i>special arrangement</i>.</p> <p>49(2).The transport of <i>consignments</i> by means of a special use <i>vessel</i> that, by virtue of its <i>design</i>, or by reason of its being chartered, is dedicated to the purpose of carrying <i>radioactive material</i>, shall be excepted from the requirements specified in Regulation 46(2). provided that the following conditions are met:</p> <p>(a) A <i>radiation protection programme</i> for the <i>shipment</i> shall be approved by the <i>competent authority</i> of the flag state of the <i>vessel</i> and, when requested, by the <i>competent authority</i> at each port of call.</p> <p>(b) Stowage arrangements shall be predetermined for the whole voyage, including any <i>consignments</i> to be loaded at ports of call en route.</p> <p>(c) The loading, carriage and unloading of the <i>consignments</i> shall be supervised by persons qualified in the transport of <i>radioactive material</i>.</p>

<p>Additional Requirements Relating To Transport By Air</p>	<p>50(1). <i>Type B(M) packages and consignments under exclusive use</i> shall not be transported on passenger aircraft.</p> <p>50(2). Vented <i>Type B(M) packages, packages</i> that require external cooling by an ancillary cooling system, <i>packages</i> subject to operational controls during transport and <i>packages</i> containing liquid pyrophoric materials shall not be transported by air.</p> <p>50(3). <i>Packages or overpacks</i> having a surface <i>dose rate</i> greater than 2mSv/h shall not be transported by air except by <i>special arrangement</i>.</p>
<p>Additional Requirements Relating To Transport By Post</p>	<p>51(1). A <i>consignment</i> that conforms to the requirements of Regulation 31(1), in which the activity of the <i>radioactive contents</i> does not exceed one tenth of the limits prescribed in Table 4, and that does not contain uranium hexafluoride, may be accepted for domestic movement by national postal authorities, subject to such additional requirements as those authorities may prescribe.</p> <p>51(2). A <i>consignment</i> that conforms to the requirements of Regulation 31(1), in which the activity of the <i>radioactive contents</i> does not exceed one tenth of the limits prescribed in Table 4, and that does not contain uranium hexafluoride, may be accepted for international movement by post, subject in particular to the following additional requirements as prescribed by the Acts of the Universal Postal Union:</p> <p>(a) The <i>consignment</i> shall be deposited with the postal service only by <i>consignors</i> authorized by the national authority.</p> <p>(b) The <i>consignment</i> shall be dispatched by the quickest route, normally by air.</p> <p>(c) The <i>consignment</i> shall be plainly and durably marked on the outside with the words “RADIOACTIVE MATERIAL — QUANTITIES PERMITTED FOR MOVEMENT BY POST”. These words shall be crossed out if the <i>packaging</i> is returned empty.</p> <p>(d) The <i>consignment</i> shall carry on the outside the name</p>

	<p>and address of the <i>consignor</i> with the request that the <i>consignment</i> be returned in the case of non-delivery.</p> <p>(e) The name and address of the <i>consignor</i> and the contents of the <i>consignment</i> shall be indicated on the internal <i>packaging</i>.</p>
Customs Operations	<p>52. Customs operations involving the inspection of the <i>radioactive contents</i> of a <i>package</i> shall be carried out only in a place where adequate means of controlling radiation exposure are provided and in the presence of qualified persons. Any <i>package</i> opened on customs instructions shall, before being forwarded to the <i>consignee</i>, be restored to its original condition.</p>
Undeliverable Consignments	<p>53. Where a <i>consignment</i> is undeliverable, it shall be placed in a safe location and the appropriate <i>competent authority</i> shall be informed as soon as possible and a request made for instructions on further action.</p>
Retention And Availability Of Transport Documents By Carriers	<p>54(1). A <i>carrier</i> shall not accept a <i>consignment</i> for transport unless:</p> <p>(a) A copy of the transport document and other documents or information as required by these Regulations are provided; or</p> <p>(b) The information applicable to the <i>consignment</i> is provided in electronic form.</p> <p>54(2). The information applicable to the <i>consignment</i> shall accompany the <i>consignment</i> to its final destination. This information may be on the transport document or may be on another document. This information shall be given to the <i>consignee</i> when the <i>consignment</i> is delivered.</p> <p>54(3). When the information applicable to the <i>consignment</i> is given to the <i>carrier</i> in electronic form, the information shall be available to the <i>carrier</i> at all times during transport to the <i>consignment's</i> final destination. The information shall be able to be produced without delay in a printed form.</p> <p>54(4). The <i>carrier</i> shall retain a copy of the transport document and additional information and documentation,</p>

	<p>as specified in these Regulations, for a minimum period of three months.</p> <p>54(5).When the documents are kept electronically or in a computer system, the <i>carrier</i> shall be capable of reproducing them in a printed form.</p>
	<p>SECTION VI: PART VII:REQUIREMENTS FOR RADIOACTIVE MATERIAL</p>
<p>Requirements For Special Form Radioactive Material</p>	<p>55(1).<i>Special form radioactive material</i> shall have at least one dimension of not less than 5 mm.</p> <p>55(2).<i>Special form radioactive material</i> shall be of such a nature or shall be so designed that if it is subjected to the tests specified in Regulation 76–78(2), it shall meet the following requirements:</p> <p>(a) It would not break or shatter under the impact, percussion and bending tests in Regulation 77(1)–77(3) and 77(5)(a), as applicable.</p> <p>(b) It would not melt or disperse in the heat test in Regulation 77(4) or Regulation 77(5)(b), as applicable.</p> <p>(c) The activity in the water from the leaching tests specified in Regulation 78(1) and 78(2) would not exceed 2kBq; or alternatively, for sealed sources, the leakage rate for the volumetric leakage assessment test specified in the International Organization for Standardization document: Radiation Protection — Sealed Radioactive Sources — Leakage Test Methods (ISO 9978), would not exceed the applicable acceptance threshold acceptable to the <i>competent authority</i>.</p> <p>55(3).When a sealed capsule constitutes part of the <i>special form radioactive material</i>, the capsule shall be so manufactured that it can be opened only by destroying it.</p>
<p>Requirements For Low Dispersible Radioactive Material</p>	<p>56. <i>Low dispersible radioactive material</i> shall be such that the total amount of this <i>radioactive material</i> in a <i>package</i> shall meet the following requirements:</p> <p>(a) The <i>dose rate</i> at 3m from the unshielded <i>radioactive material</i> does not exceed 10 mSv/h.</p>

	<p>(b) If subjected to the tests specified in Regulation 89(3) and 89(4) the airborne release in gaseous and particulate forms of up to 100 µm aerodynamic equivalent diameter would not exceed 100A2. A separate specimen may be used for each test.</p> <p>(c) If subjected to the test specified in Regulation 75, the activity in the water would not exceed 100A2. In the application of this test, the damaging effects of the tests specified in (b) shall be taken into account.</p>
<p>Requirements For Material Excepted From Fissile Classification</p>	<p>57. <i>Fissile material</i> excepted from classification as “FISSILE” under Regulation 20(1)(f) shall be subcritical without the need for accumulation control under the following conditions:</p> <p>(a) The conditions of Regulation 68(1)(a);</p> <p>(b) The conditions consistent with the assessment provisions stated in Regulation 72(1)(b) and 72(2)(b) for <i>packages</i>;</p> <p>(c) The conditions specified in Regulation 71(4)(a) if transported by air.</p>
	<p>REQUIREMENTS FOR PACKAGINGS AND PACKAGES</p>
<p>General Requirements For All Packaging And Packages</p>	<p>58(1). The <i>package</i> shall be so designed in relation to its mass, volume and shape that it can be easily and safely transported. In addition, the <i>package</i> shall be so designed that it can be properly secured in or on the <i>conveyance</i> during transport.</p> <p>58(2) The <i>design</i> shall be such that any lifting attachments on the <i>package</i> will not fail when used in the intended manner and that if failure of the attachments should occur, the ability of the <i>package</i> to meet other requirements of these Regulations would not be impaired. The <i>design</i> shall take account of appropriate safety factors to cover snatch lifting.</p> <p>58(3). Attachments and any other features on the outer surface of the <i>package</i> that could be used to lift it shall be designed either to support its mass in accordance with the requirements of Regulation 58(2) or shall be removable or otherwise rendered incapable of being used during transport.</p>

58(4). As far as practicable, the *packaging* shall be so designed that the external surfaces are free from protruding features and can be easily decontaminated.

58(5). As far as practicable, the outer layer of the *package* shall be so designed as to prevent the collection and the retention of water.

58(6). Any features added to the *package* at the time of transport that are not part of the *package* shall not reduce its safety.

58(7). The *package* shall be capable of withstanding the effects of any acceleration, vibration or vibration resonance that may arise under routine conditions of transport without any deterioration in the effectiveness of the closing devices on the various receptacles or in the integrity of the *package* as a whole. In particular, nuts, bolts and other securing devices shall be so designed as to prevent them from becoming loose or being released unintentionally, even after repeated use.

58(8). The *design* of the *package* shall take into account ageing mechanisms.

58(9). The materials of the *packaging* and any components or structures shall be physically and chemically compatible with each other and with the *radioactive contents*. Account shall be taken of their behavior under irradiation.

58(10). All valves through which the *radioactive contents* could escape shall be protected against unauthorized operation.

58(11). The *design* of the *package* shall take into account ambient temperatures and pressures that are likely to be encountered in routine conditions of transport.

58(12). A *package* shall be so designed that it provides sufficient shielding to ensure that, under routine conditions of transport and with the maximum *radioactive contents* that the *package* is designed to contain, the *dose rate* at any point on the external surface of the *package* would not exceed the values specified in

	<p>Regulations 31(2), 35(2) and 35(3) as applicable, with account taken of Regulation 46(2)(b) and 48(3).</p> <p>58(13).For <i>radioactive material</i> having other dangerous properties, the <i>package design</i> shall take into account those properties (see Regulation 29).</p>
<p>Additional Requirements For Packages Transported By Air</p>	<p>59(1). For <i>packages</i> to be transported by air, the temperature of the accessible surfaces shall not exceed 50°C at an ambient temperature of 38°C with no account taken for insolation.</p> <p>59(2).<i>Packages</i> to be transported by air shall be so designed that if they were exposed to ambient temperatures ranging from –40°C to +55°C, the integrity of containment would not be impaired.</p> <p>59(3).<i>Packages</i> containing <i>radioactive material</i> to be transported by air shall be capable of withstanding, without loss or dispersal of <i>radioactive contents</i> from the <i>containment system</i>, an internal pressure that produces a pressure differential of not less than <i>maximum normal operating pressure</i> plus 95 kPa.</p>
<p>Requirements For Excepted Packages</p>	<p>60.An <i>excepted package</i> shall be designed to meet the requirements specified in Regulation 58(1)– 58(13) and, addition, the requirements of Regulation 64(2) if it contains <i>fissile material</i> allowed by one of the provisions of subparagraphs (a)–(f) of Regulation 20(1) and the requirements of Regulation 59(1)–59(3) if carried by air.</p>
<p>Requirements For Industrial Packages Type IP-1 Type IP-2 Type IP-3</p>	<p>61(1).A <i>Type IP-1 package</i> shall be designed to meet the requirements specified in Regulation 58(1)–58(13) and 64(2) and, in addition, the requirements of Regulation 59(1)– 59(3). if carried by air.</p> <p>61(2).A <i>package</i> to be qualified as <i>Type IP-2</i> shall be designed to meet the requirements for <i>Type IP-1</i> as specified in Regulation 61(1) and, in addition, if it were subjected to the tests specified in Regulation 84(4) and 84(5) it would prevent:</p> <p>(a) Loss or dispersal of the <i>radioactive contents</i>; (b) More than a 20% increase in the maximum <i>dose rate</i></p>

	<p>at any external surface of the <i>package</i>.</p> <p>61(3).A <i>package</i> to be qualified as <i>Type IP-3</i> shall be designed to meet the requirements for <i>Type IP-1</i> as specified in Regulation 61(1) and, in addition, the requirements specified in Regulation 64(2)– 64(15).</p>
<p>Alternative Requirements For Industrial Packages Type IP-2 And Type IP-3</p>	<p>62(1).<i>Packages</i> may be used as <i>Type IP-2</i>, provided that:</p> <ul style="list-style-type: none"> (a) They satisfy the requirements for <i>Type IP-1</i> specified in Regulation 61(1). (b) They are designed to satisfy the requirements prescribed for UN Packing Group I or II in Chapter 6.1 of the United Nations Recommendations on the Transport of Dangerous Goods, Model Regulations. (c) When subjected to the tests required for UN Packing Group I or II, they would prevent: <ul style="list-style-type: none"> (i) Loss or dispersal of the <i>radioactive contents</i>; (ii) More than a 20% increase in the maximum <i>dose rate</i> at any external surface of the <i>package</i>. <p>62(2).Portable <i>tanks</i> may also be used as <i>Type IP-2</i> or <i>Type IP-3</i>, provided that:</p> <ul style="list-style-type: none"> (a) They satisfy the requirements for <i>Type IP-1</i> specified in Regulation 61(1). (b) They are designed to satisfy the requirements prescribed in Chapter 6.7 of the United Nations Recommendations on the Transport of Dangerous Goods, Model Regulations, or other requirements, at least equivalent, and are capable of withstanding a test pressure of 265 kPa. (c) They are designed so that any additional shielding that is provided shall be capable of withstanding the static and dynamic stresses resulting from handling and routine conditions of transport and of preventing more than a 20% increase in the maximum <i>dose rate</i> at any external surface of the portable <i>tanks</i>. <p>62(3). <i>Tanks</i>, other than portable <i>tanks</i>, may also be used as <i>Type IP-2</i> or <i>Type IP-3</i> for transporting <i>LSA-I</i> and <i>LSA-II</i> as prescribed in Table 5, provided that:</p> <ul style="list-style-type: none"> (a) They satisfy the requirements for <i>Type IP-1</i> specified in Regulation 61(1).

(b) They are designed to satisfy the requirements prescribed in regional or national regulations for the transport of dangerous goods and are capable of withstanding a test pressure of 265 kPa.

(c) They are designed so that any additional shielding that is provided shall be capable of withstanding the static and dynamic stresses resulting from handling and routine conditions of transport and of preventing more than a 20% increase in the maximum *dose rate* at any external surface of the *tanks*

62(4).*Freight containers* with the characteristics of a permanent enclosure may also be used as *Type IP-2* or *Type IP-3*, provided that:

(a) The *radioactive contents* are restricted to solid materials.

(b) They satisfy the requirements for *Type IP-1* specified in Regulation 61(1).

(c) They are designed to conform to the International Organization for Standardization document: Series 1 Freight containers — Specifications and Testing — Part 1: General Cargo Containers for General Purposes (ISO 1496-1) excluding dimensions and ratings. They shall be so designed that if subjected to the tests prescribed in that document, and to the accelerations occurring during routine conditions of transport, they would prevent:

(i) Loss or dispersal of the *radioactive contents*;

(ii) More than a 20% increase in the maximum *dose rate* at any external surface of the *freight containers*

62(5).Metal *IBCs* may also be used as *Type IP-2* or *Type IP-3*, provided that:

(a) They satisfy the requirements for *Type IP-1* specified in Regulation 61(1).

(b) They are designed to satisfy the requirements prescribed for UN Packing Group I or II in Chapter 6.5 of the United Nations Recommendations on the Transport of Dangerous Goods, Model Regulations and if they were subjected to the tests prescribed in that document, but with the drop test conducted in

	<p>the most damaging orientation, they would prevent:</p> <ul style="list-style-type: none"> (i) Loss or dispersal of the <i>radioactive contents</i>; (ii) More than a 20% increase in the maximum <i>dose rate</i> at any external surface of the <i>IBC</i>.
<p>Requirements For Packages Containing Uranium Hexafluoride</p>	<p>63(1). <i>Packages</i> designed to contain uranium hexafluoride shall meet the requirements that pertain to the radioactive and fissile properties of the material prescribed elsewhere in these Regulations. Except as allowed in Regulation 63(4)., uranium hexafluoride in quantities of 0.1 kg or more shall also be packaged and transported in accordance with the provisions of the International Organization for Standardization document: Nuclear Energy — Packaging of Uranium Hexafluoride (UF₆) for Transport (ISO 7195) and the requirements of Regulation 63(2) and 63(3).</p> <p>63(2). Each <i>package</i> designed to contain 0.1 kg or more of uranium hexafluoride shall be so designed that the <i>package</i> will meet the following requirements:</p> <ul style="list-style-type: none"> (a) Withstand, without leakage and without unacceptable stress, as specified in ISO 7195, the structural test as specified in Regulation 83, except as allowed in Regulation 63(4); (b) Withstand, without loss or dispersal of the uranium hexafluoride, the free drop test specified in Regulation 84(4); (c) Withstand, without rupture of the <i>containment system</i>, the thermal test specified in Regulation 86(3), except as allowed in Regulation 63(4). <p>63(3). <i>Packages</i> designed to contain 0.1 kg or more of uranium hexafluoride shall not be provided with pressure relief devices.</p> <p>63(4). Subject to <i>multilateral approval</i>, <i>packages</i> designed to contain 0.1 kg or more of uranium hexafluoride may be transported if the <i>packages</i> are designed:</p> <ul style="list-style-type: none"> (a) To international or national standards other than ISO 7195 provided an equivalent level of safety is maintained; and/or (b) To withstand, without leakage and without

	<p>unacceptable stress, a test pressure of less than 2.76 MPa as specified in Regulation 83; and/or</p> <p>(c) To contain 9000 kg or more of uranium hexafluoride and the <i>packages</i> do not meet the requirement of Regulation 63(2)(c).</p> <p>In all other respects, the requirements specified in Regulation 63(1)– 63(3) shall be satisfied.</p>
<p>Requirements For Type A Packages</p>	<p>64(1). <i>Type A packages</i> shall be designed to meet the requirements specified in Regulation 58(1) –58(13) and, in addition, the requirements of Regulation 59(1)–59(3) if carried by air, and of Regulation 64(2).– 64(17),</p> <p>64(2). The smallest overall external dimension of the <i>package</i> shall not be less than 10 cm.</p> <p>64(3). The outside of the <i>package</i> shall incorporate a feature such as a seal that is not readily breakable and which, while intact, will be evidence that the <i>package</i> has not been opened.</p> <p>64(4). Any tie-down attachments on the <i>package</i> shall be so designed that, under normal and accident conditions of transport, the forces in those attachments shall not impair the ability of the <i>package</i> to meet the requirements of these Regulations.</p> <p>64(5). The <i>design</i> of the <i>package</i> shall take into account temperatures ranging from –40°C to +70°C for the components of the <i>packaging</i>. Attention shall be given to freezing temperatures for liquids and to the potential degradation of <i>packaging</i> materials within the given temperature range.</p> <p>64(6). The <i>design</i> and manufacturing techniques shall be in accordance with national or international standards, or other requirements, acceptable to the <i>competent authority</i>.</p> <p>64(7). The <i>design</i> shall include a <i>containment system</i> securely closed by a positive fastening device that cannot be opened unintentionally or by a pressure that may arise within the <i>package</i>.</p> <p>64(8). <i>Special form radioactive material</i> may be</p>

considered as a component of the *containment system*.

64(9) If the *containment system* forms a separate unit of the *package*, the *containment system* shall be capable of being securely closed by a positive fastening device that is independent of any other part of the *packaging*.

64(10) The *design* of any component of the *containment system* shall take into account, where applicable, the radiolytic decomposition of liquids and other vulnerable materials and the generation of gas by chemical reaction and radiolysis.

64(11) The *containment system* shall retain its *radioactive contents* under a reduction of ambient pressure to 60 kPa.

64(12) All valves, other than pressure relief valves, shall be provided with an enclosure to retain any leakage from the valve.

64(13) A radiation shield that encloses a component of the *package* specified as a part of the *containment system* shall be so designed as to prevent the unintentional release of that component from the shield. Where the radiation shield and such component within it form a separate unit, the radiation shield shall be capable of being securely closed by a positive fastening device that is independent of any other *packaging* structure.

64(14) A *package* shall be so designed that if it were subjected to the tests specified in Regulation 84(1)–84(5) it would prevent:

- (a) Loss or dispersal of the *radioactive contents*;
- (b) More than a 20% increase in the maximum *dose rate* at any external surface of the *package*.

64(15) The *design* of a *package* intended for liquid *radioactive material* shall make provision for ullage to accommodate variations in the temperature of the contents, dynamic effects and filling dynamics.

64(16) A *Type A package* designed to contain liquid

	<p><i>radioactive material</i> shall, in addition:</p> <ul style="list-style-type: none"> (a) Be adequate to meet the conditions specified in Regulation 64(14)(a) if the <i>package</i> is subjected to the tests specified in Regulation 85, and (b) Either: <ul style="list-style-type: none"> (i) Be provided with sufficient absorbent material to absorb twice the volume of the liquid contents. Such absorbent material must be suitably positioned so as to contact the liquid in the event of leakage; or (ii) Be provided with a <i>containment system</i> composed of primary inner and secondary outer containment components designed to enclose the liquid contents completely and to ensure their retention within the secondary outer containment components, even if the primary inner components leak. <p>64(17) A <i>Type A package</i> designed for gases shall prevent loss or dispersal of the <i>radioactive contents</i> if the <i>package</i> were subjected to the tests specified in Regulation 85, except for a <i>Type A package</i> designed for tritium gas or for noble gases.</p>
<p>Requirements For Type B(U) Packages</p>	<p>65(1)<i>Type B(U) packages</i> shall be designed to meet the requirements specified in Regulation 58(1).– 58(13) the requirements specified in Regulation 59(1).–59(3). if carried by air, and in Regulation 64(2)– 64(15), except as specified in Regulation 64(14)(a) and, in addition, the requirements specified in Regulation 65(2)– 65(15).</p> <p>65(2)A <i>package</i> shall be so designed that, under the ambient conditions specified in Regulation 65(5) and 65(6), heat generated within the <i>package</i> by the <i>radioactive contents</i> shall not, under normal conditions of transport, as demonstrated by the tests in Regulation 84(1)–84(5) adversely affect the <i>package</i> in such a way that it would fail to meet the applicable requirements for containment and shielding if left unattended for a period of one week. Particular attention shall be paid to the effects of heat that may cause one or more of the following:</p> <ul style="list-style-type: none"> (a) Alteration of the arrangement, the geometrical form or the physical state of the <i>radioactive contents</i> or, if

the *radioactive material* is enclosed in a can or receptacle (for example, clad fuel elements), cause the can, receptacle or *radioactive material* to deform or melt;

(b) Lessening of the efficiency of the *packaging* through differential thermal expansion, or cracking or melting of the radiation shielding material;

(c) Acceleration of corrosion when combined with moisture.

65(3) A *package* shall be so designed that, under the ambient condition specified in Regulation 65(5) and in the absence of insolation, the temperature of the accessible surfaces of a *package* shall not exceed 50°C, unless the *package* is transported under *exclusive use*.

65(4) Except as required in Regulation 59.(1) for a *package* transported by air, the maximum temperature of any surface readily accessible during transport of a *package* under *exclusive use* shall not exceed 85°C in the absence of insolation under the ambient condition specified in Regulation 65(5). Account may be taken of barriers or screens intended to give protection to persons without the need for the barriers or screens being subject to any test.

65(5). The ambient temperature shall be assumed to be 38°C.

65(6) The solar insolation conditions shall be assumed to be as specified in Table 12.

65(7) A *package* that includes thermal protection for the purpose of satisfying the requirements of the thermal test specified in Regulation 86(3) shall be so designed that such protection will remain effective if the *package* is subjected to the tests specified in Regulation 84(1)–84(5) and 86(2)(a) and 86(2)(b) or 86(2)(b) and 86(2)(c), as appropriate. Any such protection on the exterior of the *package* shall not be rendered ineffective by ripping, cutting, skidding, abrading or rough handling.

65(8) A *package* shall be so designed that if it were subjected to:

- (a) The tests specified in Regulation 84(1)– 84(5) it would restrict the loss of *radioactive contents* to not more than 10–6A2 per hour.
- (b) The tests specified in Regulation 86(1), 86(2)(b), 86(3) and 86(4) and either the test in:
- Regulation 86(2)(c) when the *package* has a mass not greater than 500 kg, an overall density not greater than 1000 kg/m³ based on the external dimensions, and *radioactive contents* greater than 1000A2 not as *special form radioactive material*; or
 - Regulation 86(2)(a), for all other *packages*.
- (i) It would retain sufficient shielding to ensure that the *dose rate* 1 m from the surface of the *package* would not exceed 10 mSv/h with the maximum *radioactive contents* that the *package* is designed to contain.
- (ii) It would restrict the accumulated loss of *radioactive contents* in a period of one week to not more than 10A2 for krypton-85 and not more than A2 for all other radionuclides.

Where mixtures of different radionuclides are present, the provisions of Regulation 15(3)– 15(5) shall apply, except that for krypton-85 an effective A₂(i) value equal to 10A₂ may be used. For case (a), the assessment shall take into account the external *non-fixed contamination* limits of Regulation 30(1).

65(9). A *package* for *radioactive contents* with activity greater than 105A₂ shall be so designed that if it were subjected to the enhanced water immersion test specified in Regulation 87, there would be no rupture of the *containment system*.

65(10). Compliance with the permitted activity release limits shall depend neither upon filters nor upon a mechanical cooling system.

65(11). A *package* shall not include a pressure relief system from the *containment system* that would allow the release of *radioactive material* to the environment under the conditions of the tests specified in Regulation 84(1)– 84(5) and 86(1)– 86(4)..

	<p>65(12). A <i>package</i> shall be so designed that if it were at the <i>maximum normal operating pressure</i> and it were subjected to the tests specified in Regulation 84(1)– 84(4) and Regulation 86(1)– 86(4), the levels of strains in the <i>containment system</i> would not attain values that would adversely affect the <i>package</i> in such a way that it would fail to meet the applicable requirements.</p> <p>65(13). A <i>package</i> shall not have a <i>maximum normal operating pressure</i> in excess of a gauge pressure of 700 kPa.</p> <p>65(14). A <i>package</i> containing <i>low dispersible radioactive material</i> shall be so designed that any features added to the <i>low dispersible radioactive material</i> that are not part of it, or any internal components of the <i>packaging</i>, shall not adversely affect the performance of the <i>low dispersible radioactive material</i>.</p> <p>65(15). A <i>package</i> shall be designed for an ambient temperature range of –40°C to +38°C.</p>
<p>Requirements For Type B(M) Packages</p>	<p>66(1). <i>Type B(M) packages</i> shall meet the requirements for <i>Type B(U) packages</i> specified in Regulation 61(3) except that for <i>packages</i> to be transported solely within a specified country or solely between specified countries, conditions other than those given in Regulation 64(5), 65(3)–65(6) and 65(9)–65(15) may be assumed with the <i>approval</i> of the <i>competent authorities</i> of these countries.</p> <p>The requirements for <i>Type B(U) packages</i> specified in Regulation 65(3) and 65(9)–65(15) shall be met as far as practicable.</p> <p>66(2). Intermittent venting of <i>Type B(M) packages</i> may be permitted during transport, provided that the operational controls for venting are acceptable to the relevant <i>competent authorities</i>.</p>
<p>Requirements For Type C Packages</p>	<p>67(1), <i>Type C packages</i> shall be designed to meet the requirements specified in Regulation 58(1)–58(3) and 64(2)–64(15), except as specified in Regulation 64(14)(a) and the requirements specified in Regulation 65(2)–65(6), 65(10)–65(15) and 67(2)–67(4).</p>

	<p>67(2). A <i>package</i> shall be capable of meeting the assessment criteria prescribed for tests in Regulation 65(8)(b) and 65(12) after burial in an environment defined by a thermal conductivity of 0.33 W/(m·K) and a temperature of 38°C in the steady state. Initial conditions for the assessment shall assume that any thermal insulation of the <i>package</i> remains intact, the <i>package</i> is at the <i>maximum normal operating pressure</i> and the ambient temperature is 38°C.</p> <p>67(3). A <i>package</i> shall be so designed that if it were at the <i>maximum normal operating pressure</i> and subjected to:</p> <p>(a) The tests specified in Regulation 84(1)– 84(5), it would restrict the loss of <i>radioactive contents</i> to not more than 10–6A2 per hour.</p> <p>(b) The test sequences in Regulation 89(1):</p> <p>(i) It would retain sufficient shielding to ensure that the <i>dose rate</i> 1 m from the surface of the <i>package</i> would not exceed 10 mSv/h with the maximum <i>radioactive contents</i> that the <i>package</i> is designed to contain.</p> <p>(ii) It would restrict the accumulated loss of <i>radioactive contents</i> in a period of one week to not more than 10A2 for krypton-85 and not more than A2 for all other radionuclides.</p> <p>Where mixtures of different radionuclides are present, the provisions of Regulation 15(3) –15(5) shall apply, except that for krypton-85 an effective A2(i) value equal to 10A2 may be used. For case (a), the assessment shall take into account the external <i>contamination</i> limits of Regulation 30(1).</p> <p>67(4). A <i>package</i> shall be so designed that there will be no rupture of the <i>containment system</i> following performance of the enhanced water immersion test specified in Regulation 87.</p>
<p>Requirements For Packages Containing Fissile Material</p>	<p>68(1). <i>Fissile material</i> shall be transported so as to:</p> <p>(a) Maintain sub-criticality during routine, normal and accident conditions of transport; in particular, the following contingencies shall be considered:</p> <p>(i) Leakage of water into or out of <i>packages</i>;</p>

- (ii) Loss of efficiency of built-in neutron absorbers or moderators;
 - (iii) Rearrangement of the contents either within the *package* or as a result of loss from the *package*;
 - (iv) Reduction of spaces within or between *packages*;
 - (v) *Packages* becoming immersed in water or buried in snow;
 - (vi) Temperature changes.
- (b) Meet the requirements:
- (i) Of Regulation 64(2) except for unpackaged material when specifically allowed by Regulation 20(1)(e);
 - (ii) Prescribed elsewhere in these Regulations that pertain to the radioactive properties of the material;
 - (iii) Of Regulation 64(3) unless the material is excepted by Regulation 20(1);
- (iv) Of Regulation 69(1)–73, unless the material is excepted by Regulation 20(1), 68(2) or 68(3).

68(2).*Packages* containing *fissile material* that meets the requirements of Regulation 68(2)(d) and one of the provisions of Regulation 68(2)(a)–(c) are excepted from the requirements of Regulation 69(1)–73.

(a) *Packages* containing *fissile material* in any form provided that:

(i) The smallest external dimension of the *package* is not less than 10 cm.

(ii) The *CSI* of the *package* is calculated using the following formula:

$$CSI = 50 \times 5 \times \{ [\text{mass of uranium-235 in } \textit{package} \text{ (g)}] / Z + [\text{mass of other } \textit{fissile nuclides} \text{ in } \textit{package} \text{ (g)}] / 280 \}$$

where the values of *Z* are taken from Table 13.

(iii) The *CSI* of any *package* does not exceed 10.

(b) *Packages* containing *fissile material* in any form provided that:

(i) The smallest external dimension of the *package* is not less than 30 cm.

(ii) The *package*, after being subjected to the tests specified in Regulation 84(1)–84(5):

— Retains its *fissile material* contents;

— Preserves the minimum overall outside

dimensions of the *package* to at least 30 cm;
— Prevents the entry of a 10 cm cube.

(iii) The *CSI* of the *package* is calculated using the following formula:

$$CSI = 50 \times 2 \times \{ [\text{mass of uranium-235 in } \textit{package} \text{ (g)}] / Z + [\text{mass of other } \textit{fissile nuclides} \text{1 in } \textit{package} \text{ (g)}] / 280 \}$$

where the values of *Z* are taken from Table 13.

(iv) The *CSI* of any *package* does not exceed 10.

(c) *Packages* containing *fissile material* in any form provided that:

(i) The smallest external dimension of the *package* is not less than 10 cm.

(ii) The *package*, after being subjected to the tests specified in Regulation 84(1)–84(5):

- Retains its *fissile material* contents;
- Preserves the minimum overall outside dimensions of the *package* to at least 10 cm;
- Prevents the entry of a 10 cm cube.

(iii) The *CSI* of the *package* is calculated using the following formula:

$$CSI = 50 \times 2 \times \{ [\text{mass of uranium-235 in } \textit{package} \text{ (g)}] / 450 + [\text{mass of other } \textit{fissile nuclides} \text{1 in } \textit{package} \text{ (g)}] / 280 \}$$

(iv) The total mass of *fissile nuclides* in any *package* does not exceed 15 g.

(d) The total mass of beryllium, hydrogenous material enriched in deuterium, graphite and other allotropic forms of carbon in an individual *package* shall not be greater than the mass of *fissile nuclides* in the *package* except where the total concentration of these materials does not exceed 1 g in any 1000 g of material. Beryllium incorporated in copper alloys up to 4% by weight of the alloy does not need to be considered.

68(3) *Packages* containing not more than 1000 g of plutonium are excepted from the application of Regulation 69(1)–73 provided that:

(a) Not more than 20% of the plutonium by mass is *fissile nuclides*.

(b) The *CSI* of the *package* is calculated using the following formula:

$$CSI = 50 \times 2 \times [\text{mass of plutonium (g)} / 1000]$$

(c) If *uranium* is present with the plutonium, the mass of

	<p><i>uranium</i> shall be no more than 1% of the mass of the plutonium.</p>
<p>Contents Specification For Assessments Of Package Designs Containing Fissile Material</p>	<p>69(1). Where the chemical or physical form, isotopic composition, mass or concentration, moderation ratio or density, or geometric configuration is not known, the assessments of Regulation 71(1)–72(2) shall be performed assuming that each parameter that is not known has the value that gives the maximum neutron multiplication consistent with the known conditions and parameters in these assessments.</p> <p>69(2). For irradiated nuclear fuel, the assessments of Regulation 71(1)–72(2) shall be based on an isotopic composition demonstrated to provide either:</p> <p>(a) The maximum neutron multiplication during the irradiation history; or</p> <p>(b) A conservative estimate of the neutron multiplication for the <i>package</i> assessments. After irradiation but prior to <i>shipment</i>, a measurement shall be performed to confirm the conservatism of the isotopic composition.</p>
<p>Geometry And Temperature Requirements</p>	<p>70(1). The <i>package</i>, after being subjected to the tests specified in Regulation 84(1)–84(5), shall:</p> <p>(a) Preserve the minimum overall outside dimensions of the <i>package</i> to at least 10 cm;</p> <p>(b) Prevent the entry of a 10 cm cube.</p> <p>70(2). The <i>package</i> shall be designed for an ambient temperature range of –40°C to +38°C unless the <i>competent authority</i> specifies otherwise in the certificate of approval for the <i>package design</i>.</p>
<p>Assessment Of An Individual Package In Isolation</p>	<p>71(1). For a <i>package</i> in isolation, it shall be assumed that water can leak into or out of all void spaces of the <i>package</i>, including those within the <i>containment system</i>.</p> <p>However, if the <i>design</i> incorporates special features to prevent such leakage of water into or out of certain void spaces, even as a result of error, absence of leakage may be assumed in respect of those void spaces. Special features shall include either of the following:</p>

- (a) Multiple high standard water barriers, not less than two of which would remain watertight if the *package* were subject to the tests prescribed in Regulation 72(2)(b), a high degree of quality control in the manufacture, maintenance and repair of *packagings*, and tests to demonstrate the closure of each *package* before each *shipment*; or
- (b) For *packages* containing uranium hexafluoride only, with a maximum *uranium* enrichment of 5 mass per cent uranium-235:
 - (i) *Packages* where, following the tests prescribed in Regulation 72(2)(b), there is no physical contact between the valve or the plug and any other component of the *packaging* other than at its original point of attachment and where, in addition, following the test prescribed in Regulation 86(3), the valve and the plug remain leak tight;
 - (ii) A high degree of quality control in the manufacture, maintenance and repair of *packagings*, coupled with tests to demonstrate closure of each *package* before each *shipment*.

71(2). It shall be assumed that the *confinement system* is closely reflected by at least 20 cm of water or such greater reflection as may additionally be provided by the surrounding material of the *packaging*. However, when it can be demonstrated that the *confinement system* remains within the *packaging* following the tests prescribed in Regulation 72(2)(b), close reflection of the *package* by at least 20 cm of water may be assumed in Regulation 71(3)(c).

71(3). The *package* shall be subcritical under the conditions of Regulation 71(1) and 71(2) and with the *package* conditions that result in the maximum neutron multiplication consistent with:

- (a) Routine conditions of transport (incident free);
- (b) The tests specified in Regulation 72(1)(b);
- (c) The tests specified in Regulation 72(2)(b).

71(4). For *packages* to be transported by air:

- (a) The *package* shall be subcritical under conditions consistent with the *Type C package* tests specified in

	<p>Regulation 89(1), assuming reflection by at least 20 cm of water but no water in-leakage.</p> <p>(b) In the assessment of Regulation 71(3) use of special features as specified in Regulation 71(1) is allowed provided that leakage of water into or out of the void spaces is prevented when the <i>package</i> is submitted to the <i>Type C package</i> tests specified in Regulation 89(1) followed by the water leakage test specified in Regulation 88(3).</p>
<p>Assessment Of Package Arrays:</p> <p>Under Normal Conditions Of Transport; And</p> <p>Under Accident Conditions Of Transport</p>	<p>72(1). A number N shall be derived, such that five times N <i>packages</i> shall be subcritical for the arrangement and <i>package</i> conditions that provide the maximum neutron multiplication consistent with the following:</p> <p>(a) There shall not be anything between the <i>packages</i>, and the <i>package</i> arrangement shall be reflected on all sides by at least 20 cm of water.</p> <p>(b) The state of the <i>packages</i> shall be their assessed or demonstrated condition if they had been subjected to the tests specified in Regulation 84(1)–84(5).</p> <p>72(2). A number N shall be derived, such that two times N <i>packages</i> shall be subcritical for the arrangement and <i>package</i> conditions that provide the maximum neutron multiplication consistent with the following:</p> <p>(a) Hydrogenous moderation between the <i>packages</i> and the <i>package</i> arrangement reflected on all sides by at least 20 cm of water.</p> <p>(b) The tests specified in Regulation 84(1)–84(5) followed by whichever of the following is the more limiting:</p> <p>(i) The tests specified in Regulation 86(2)(b) and either 86(2)(c) for <i>packages</i> having a mass not greater than 500 kg and an overall density not greater than 1000 kg/m³ based on the external dimensions or Regulation 86(2)(a) for all other <i>packages</i>, followed by the test specified in Regulation 86(3) and completed by the tests specified in Regulation 88(1)–88(3); or</p> <p>(ii) The test specified in Regulation 86(4).</p> <p>(c) Where any part of the <i>fissile material</i> escapes from the <i>containment system</i> following the tests specified in Regulation 72(2)(b), it shall be</p>

	<p>assumed that <i>fissile material</i> escapes from each <i>package</i> in the array and that all of the <i>fissile material</i> shall be arranged in the configuration and moderation that results in the maximum neutron multiplication with close reflection by at least 20 cm of water.</p>
Determination Of Criticality Safety Index For Packages	<p>73. The <i>CSI</i> for <i>packages</i> containing <i>fissile material</i> shall be obtained by dividing the number 50 by the smaller of the two values of <i>N</i> derived in Regulation 72(1) and 72(2) (i.e. $CSI = 50/N$). The value of the <i>CSI</i> may be zero, provided that an unlimited number of <i>packages</i> are subcritical (i.e. <i>N</i> is effectively equal to infinity in both cases).</p>
	<p>SECTION VII: TEST PROCEDURES</p>
Demonstration Of Compliance	<p>74(1). Demonstration of compliance with the performance standards required in Section VI shall be accomplished by any of the following methods listed below or by a combination thereof:</p> <p>(a) Performance of tests with specimens representing <i>special form radioactive material</i>, or <i>low dispersible radioactive material</i>, or with prototypes or samples of the <i>packaging</i>, where the contents of the specimen or the <i>packaging</i> for the tests shall simulate as closely as practicable the expected range of <i>radioactive contents</i> and the specimen or <i>packaging</i> to be tested shall be prepared as presented for transport.</p> <p>(b) Reference to previous satisfactory demonstrations of a sufficiently similar nature.</p> <p>(c) Performance of tests with models of appropriate scale, incorporating those features that are significant with respect to the item under investigation when engineering experience has shown the results of such tests to be suitable for <i>design</i> purposes. When a scale model is used, the need for adjusting certain test parameters, such as penetrator diameter or compressive load, shall be taken into account.</p> <p>(d) Calculation, or reasoned argument, when the calculation procedures and parameters are generally agreed to be reliable or conservative.</p> <p>74(2). After the specimen, prototype or sample has been</p>

	<p>subjected to the tests, appropriate methods of assessment shall be used to ensure that the requirements of this section have been fulfilled in compliance with the performance and acceptance standards prescribed in Section VI.</p>
<p>Leaching Test For Low Dispersible Radioactive Material</p>	<p>75. A solid material sample representing the entire contents of the <i>package</i> shall be immersed for 7 days in water at ambient temperature. The volume of water to be used in the test shall be sufficient to ensure that at the end of the 7 day test period, the free volume of the unabsorbed and unreacted water remaining shall be at least 10% of the volume of the solid test sample itself. The water shall have an initial pH of 6–8 and a maximum conductivity of 1 mS/m at 20°C. The total activity of the free volume of water shall be measured following the 7 day immersion of the test sample.</p>
<p>Tests For Special Form Radioactive Material General</p>	<p>76. Specimens that comprise or simulate <i>special form radioactive material</i> shall be subjected to the impact test, the percussion test, the bending test and the heat test specified in Regulation 77(1)–77(4). A different specimen may be used for each of the tests. Following each test, a leaching assessment or volumetric leakage test shall be performed on the specimen by a method no less sensitive than the methods given in Regulation 78(1) for indispersible solid material or in Regulation 78(2) for encapsulated material.</p>
<p>Test Methods</p>	<p>77(1). Impact test: The specimen shall drop onto the target from a height of 9 m. The target shall be as defined in Regulation 82.</p> <p>77(2). Percussion test: The specimen shall be placed on a sheet of lead that is supported by a smooth solid surface and struck by the flat face of a mild steel bar so as to cause an impact equivalent to that resulting from a free drop of 1.4 kg from a height of 1 m. The lower part of the bar shall be 25 mm in diameter with the edges rounded off to a radius of 3.0 ± 0.3 mm. The lead, of hardness number 3.5–4.5 on the Vickers scale and not more than 25 mm thick, shall cover an area greater than that covered by the specimen. A fresh surface of lead shall be used for each impact. The bar shall strike the specimen so as to</p>

	<p>cause maximum damage.</p> <p>77(3). Bending test: The test shall apply only to long, slender sources with both a minimum length of 10 cm and a length to minimum width ratio of not less than 10. The specimen shall be rigidly clamped in a horizontal position so that one half of its length protrudes from the face of the clamp. The orientation of the specimen shall be such that the specimen will suffer maximum damage when its free end is struck by the flat face of a steel bar. The bar shall strike the specimen so as to cause an impact equivalent to that resulting from a free vertical drop of 1.4 kg from a height of 1 m. The lower part of the bar shall be 25 mm in diameter with the edges rounded off to a radius of 3.0 ± 0.3 mm.</p> <p>77(4). Heat test: The specimen shall be heated in air to a temperature of 800°C and held at that temperature for a period of 10 min and shall then be allowed to cool.</p> <p>77(5). Specimens that comprise or simulate <i>radioactive material</i> enclosed in a sealed capsule may be excepted from:</p> <p>(a) The tests prescribed in Regulation 77(1) and 77(2), provided that the specimens are alternatively subjected to the impact test prescribed in the International Organization for Standardization document: Radiological Protection — Sealed Radioactive Sources — General Requirements and Classification (ISO 2919):</p> <p>(i) The Class 4 impact test if the mass of the <i>special form radioactive material</i> is less than 200 g;</p> <p>(ii) The Class 5 impact test if the mass of the <i>special form radioactive material</i> is more than 200 g but less than 500 g.</p> <p>(b) The test prescribed in Regulation 77(4), provided the specimens are alternatively subjected to the Class 6 temperature test specified in ISO 2919.</p>
<p>Leaching And Volumetric Leakage Assessment Methods</p>	<p>78(1) For specimens that comprise or simulate indispersible solid material, a leaching assessment shall be performed as follows:</p> <p>(a) The specimen shall be immersed for 7 days in water at</p>

ambient temperature. The volume of water to be used in the test shall be sufficient to ensure that at the end of the 7 day test period the free volume of the unabsorbed and unreacted water remaining shall be at least 10% of the volume of the solid test sample itself. The water shall have an initial pH of 6–8 and a maximum conductivity of 1 mS/m at 20°C.

- (b) The water and the specimen shall then be heated to a temperature of $50 \pm 5^\circ\text{C}$ and maintained at this temperature for 4 h.
- (c) The activity of the water shall then be determined.
- (d) The specimen shall then be kept for at least 7 days in still air at not less than 30°C and with a relative humidity of not less than 90%.
- (e) The specimen shall then be immersed in water of the same specification as that in (a) and the water and the specimen shall be heated to $50 \pm 5^\circ\text{C}$ and maintained at this temperature for 4 h.
- (f) The activity of the water shall then be determined.

78(2). For specimens that comprise or simulate *radioactive material* enclosed in a sealed capsule, either a leaching assessment or a volumetric leakage assessment shall be performed as follows:

- (a) The leaching assessment shall consist of the following steps:
 - (i) The specimen shall be immersed in water at ambient temperature. The water shall have an initial pH of 6–8 with a maximum conductivity of 1 mS/m at 20°C .
 - (ii) The water and the specimen shall then be heated to a temperature of $50 \pm 5^\circ\text{C}$ and maintained at this temperature for 4 h.
 - (iii) The activity of the water shall then be determined.
 - (iv) The specimen shall then be kept for at least 7 days in still air at not less than 30°C and with a relative humidity of not less than 90%.
 - (v) The process in (i), (ii) and (iii) shall be repeated.
- (b) The alternative volumetric leakage assessment shall comprise any of the tests prescribed in the International Organization for Standardization document: Radiation Protection — Sealed Radioactive Sources — Leakage Test Methods (ISO 9978) provided that they are

	acceptable to the <i>competent authority</i> .
Tests For Low Dispersible Radioactive Material	79. A specimen that comprises or simulates <i>low dispersible radioactive material</i> shall be subjected to the enhanced thermal test specified in Regulation 89(3) and the impact test specified in Regulation 89(4). A different specimen may be used for each of the tests. Following each test, the specimen shall be subjected to the leach test specified in Regulation 75. After each test it shall be determined if the applicable requirements of Regulation 56 have been met.
Tests For Packages Preparation Of A Specimen For Testing	80(1). All specimens shall be inspected before testing in order to identify and record faults or damage, including the following: (a) Divergence from the <i>design</i> ; (b) Defects in manufacture; (c) Corrosion or other deterioration; (d) Distortion of features. 80(2). The <i>containment system</i> of the <i>package</i> shall be clearly specified 80(3). The external features of the specimen shall be clearly identified so that reference may be made simply and clearly to any part of such a specimen.
Testing The Integrity Of The Containment System And Shielding And Assessing Criticality Safety	81. After each test or group of tests or sequence of the applicable tests, as appropriate, specified in Regulation 83–89(4) (a) Faults and damage shall be identified and recorded. (b) It shall be determined whether the integrity of the <i>containment system</i> and shielding has been retained to the extent required in Section VI for the <i>package</i> under test. (c) For <i>packages</i> containing <i>fissile material</i> , it shall be determined whether the assumptions and conditions used in the assessments required by Regulation 68(1)–73 for one or more <i>packages</i> are valid.
Target For Drop Tests	82. The target for the drop test specified in Regulation 77(1), 84(4), 85(a), 86(2) and 89(2) shall be a flat, horizontal surface of such a character that any increase in

	<p>its resistance to displacement or deformation upon impact by the specimen would not significantly increase damage to the specimen.</p>
<p>Test For Packagings Designed To Contain Uranium Hexafluoride</p>	<p>83. Specimens that comprise or simulate <i>packagings</i> designed to contain 0.1 kg or more of uranium hexafluoride shall be tested hydraulically at an internal pressure of at least 1.38 MPa, but when the test pressure is less than 2.76 MPa, the <i>design</i> shall require <i>multilateral approval</i>. For retesting <i>packagings</i>, any other equivalent non-destructive testing may be applied, subject to <i>multilateral approval</i>.</p>
<p>Tests For Demonstrating Ability To Withstand Normal Conditions Of Transport</p>	<p>84(1). The tests are the water spray test, the free drop test, the stacking test and the penetration test. Specimens of the <i>package</i> shall be subjected to the free drop test, the stacking test and the penetration test, preceded in each case by the water spray test. One specimen may be used for all the tests, provided that the requirements of Regulation 84(2) are fulfilled.</p> <p>84(2). The time interval between the conclusion of the water spray test and the succeeding test shall be such that the water has soaked in to the maximum extent, without appreciable drying of the exterior of the specimen. In the absence of any evidence to the contrary, this interval shall be taken to be 2 h if the water spray is applied from four directions simultaneously. No time interval shall elapse, however, if the water spray is applied from each of the four directions consecutively.</p> <p>84(3). Water spray test: The specimen shall be subjected to a water spray test that simulates exposure to rainfall of approximately 5 cm per hour for at least 1 h.</p> <p>84(4). Free drop test: The specimen shall drop onto the target so as to suffer maximum damage in respect of the safety features to be tested:</p> <p>(a) The height of the drop, measured from the lowest point of the specimen to the upper surface of the target, shall be not less than the distance specified in Table 14 for the applicable mass. The target shall be as defined in Regulation 82.</p> <p>(b) For rectangular fibre board or wood <i>packages</i> not exceeding a mass of 50 kg, a separate specimen shall be subjected to a free drop onto each corner from a height of 0.3 m.</p>

	<p>(c) For cylindrical fibreboard <i>packages</i> not exceeding a mass of 100 kg, a separate specimen shall be subjected to a free drop onto each of the quarters of each rim from a height of 0.3 m.</p> <p>84(5). Stacking test: Unless the shape of the <i>packaging</i> effectively prevents stacking, the specimen shall be subjected, for a period of 24 h, to a compressive load equal to the greater of the following:</p> <p>(a) The equivalent of 5 times the maximum weight of the <i>package</i>;</p> <p>(b) The equivalent of 13 kPa multiplied by the vertically projected area of the <i>package</i>. The load shall be applied uniformly to two opposite sides of the specimen, one of which shall be the base on which the <i>package</i> would typically rest.</p> <p>84(5). Penetration test: The specimen shall be placed on a rigid, flat, horizontal surface that will not move significantly while the test is being carried out:</p> <p>(a) A bar, 3.2 cm in diameter with a hemispherical end and a mass of 6 kg, shall be dropped and directed to fall with its longitudinal axis vertical onto the centre of the weakest part of the specimen so that if it penetrates sufficiently far it will hit the <i>containment system</i>. The bar shall not be significantly deformed by the test performance.</p> <p>(b) The height of the drop of the bar, measured from its lower end to the intended point of impact on the upper surface of the specimen, shall be 1 m.</p>
<p>Additional Tests For Type A Packages Designed For Liquids And Gases</p>	<p>85. A specimen, or separate specimens, shall be subjected to each of the following tests unless it can be demonstrated that one test is more severe for the specimen in question than the other, in which case one specimen shall be subjected to the more severe test:</p> <p>(a) Free drop test: The specimen shall drop onto the target so as to suffer the maximum damage in respect of containment. The height of the drop, measured from the lowest part of the specimen to the upper surface of the target, shall be 9 m. The target shall be as defined in Regulation 82.</p> <p>(b) Penetration test: The specimen shall be subjected to</p>

	<p>the test specified in Regulation 84(6), except that the height of the drop shall be increased to 1.7 m from the 1 m specified in Regulation 84(6)(b).</p>
<p>Tests For Demonstrating Ability To Withstand Accident Conditions Of Transport</p>	<p>86(1). The specimen shall be subjected to the cumulative effects of the tests specified in Regulation 86(2) and 86(3), in that order. Following these tests, either this specimen or a separate specimen shall be subjected to the effect(s) of the water immersion test(s), as specified in Regulation 86(4) and, if applicable, Regulation 87.</p> <p>86(2). Mechanical test: The mechanical test consists of three different drop tests. Each specimen shall be subjected to the applicable drops, as specified in Regulation 65(8) or 72(2). The order in which the specimen is subjected to the drops shall be such that, on completion of the mechanical test, the specimen shall have suffered such damage as will lead to maximum damage in the thermal test that follows:</p> <p>(a) For drop I, the specimen shall drop onto the target so as to suffer maximum damage, and the height of the drop, measured from the lowest point of the specimen to the upper surface of the target, shall be 9 m. The target shall be as defined in Regulation 82.</p> <p>(b) For drop II, the specimen shall drop onto a bar rigidly mounted perpendicularly on the target so as to suffer maximum damage. The height of the drop, measured from the intended point of impact of the specimen to the upper surface of the bar, shall be 1 m. The bar shall be of solid mild steel of circular cross-section, 15.0 ± 0.5 cm in diameter and 20 cm long, unless a longer bar would cause greater damage, in which case a bar of sufficient length to cause maximum damage shall be used. The upper end of the bar shall be flat and horizontal with its edge rounded off to a radius of not more than 6 mm. The target on which the bar is mounted shall be as described in Regulation 82.</p> <p>(c) For drop III, the specimen shall be subjected to a dynamic crush test by positioning the specimen on the target so as to suffer maximum damage by the drop of a 500 kg mass from 9 m onto the specimen. The mass shall consist of a solid mild steel plate 1 m \times 1 m and shall fall in a horizontal attitude. The lower face of the steel plate shall have its edges and</p>

corners rounded off to a radius of not more than 6 mm. The height of the drop shall be measured from the underside of the plate to the highest point of the specimen. The target on which the specimen rests shall be as defined in Regulation 82.

86(3). Thermal test: The specimen shall be in thermal equilibrium under conditions of an ambient temperature of 38°C, subject to the solar insolation conditions specified in Table 12 and subject to the *design* maximum rate of internal heat generation within the *package* from the *radioactive contents*. Alternatively, any of these parameters are allowed to have different values prior to, and during, the test, provided due account is taken of them in the subsequent assessment of *package* response. The thermal test shall then consist of (a) followed by (b).

(a) Exposure of a specimen for a period of 30 min to a thermal environment that provides a heat flux at least equivalent to that of a hydrocarbon fuel–air fire in sufficiently quiescent ambient conditions to give a minimum average flame emissivity coefficient of 0.9 and an average temperature of at least 800°C, fully engulfing the specimen, with a surface absorptivity coefficient of 0.8 or that value that the *package* may be demonstrated to possess if exposed to the fire specified.

(b) Exposure of the specimen to an ambient temperature of 38°C, subject to the solar insolation conditions specified in Table 12 and subject to the *design* maximum rate of internal heat generation within the *package* by the *radioactive contents* for a sufficient period to ensure that temperatures in the specimen are decreasing in all parts of the specimen and/or are approaching initial steady state conditions. Alternatively, any of these parameters are allowed to have different values following cessation of heating, provided due account is taken of them in the subsequent assessment of *package* response. During and following the test, the specimen shall not be artificially cooled and any combustion of materials of the specimen shall be permitted to proceed naturally.

86(4). Water immersion test: The specimen shall be immersed under a head of water of at least 15 m for a period of not less than 8 h in the attitude that will lead to maximum damage. For demonstration purposes, an

	<p>external gauge pressure of at least 150 kPa shall be considered to meet these conditions.</p>
<p>Enhanced Water Immersion Test For Type B(U) And Type B(M) Packages Containing More Than 105A2 And Type C Packages</p>	<p>87. Enhanced water immersion test: The specimen shall be immersed under a head of water of at least 200 m for a period of not less than 1 h. For demonstration purposes, an external gauge pressure of at least 2 MPa shall be considered to meet these conditions.</p>
<p>Water Leakage Test For Packages Containing Fissile Material</p>	<p>88(1). <i>Packages</i> for which water in-leakage or out-leakage to the extent that results in greatest reactivity has been assumed for purposes of assessment under Regulation 71(1)–72(2) shall be excepted from the water leakage test.</p> <p>88(2). Before the specimen is subjected to the water leakage test specified below, it shall be subjected to the tests in Regulation 86(2)(b) and either Regulation 86(2)(a) or 86(2)(c), as required by Regulation 72(2) and the test specified in Regulation 86(3).</p> <p>88(3). The specimen shall be immersed under a head of water of at least 0.9 m for a period of not less than 8 h and in the attitude for which maximum leakage is expected.</p>
<p>Tests For Type C Packages</p>	<p>89(1). Specimens shall be subjected to the effects of the following test sequences:</p> <ul style="list-style-type: none"> (a) The tests specified in Regulation 86(2)(a), 86(2)(c), 89(2) and 89(3), in this order; (b) The test specified in Regulation 89(4). <p>Separate specimens are allowed to be used for the sequence in (a) and for (b).</p> <p>89(2). Puncture–tearing test: The specimen shall be subjected to the damaging effects of a vertical solid probe</p>

	<p>made of mild steel. The orientation of the <i>package</i> specimen and the impact point on the <i>package</i> surface shall be such as to cause maximum damage at the conclusion of the test sequence specified in Regulation 89(1)(a):</p> <p>(a) The specimen, representing a <i>package</i> having a mass of less than 250 kg, shall be placed on a target and subjected to a probe having a mass of 250 kg falling from a height of 3 m above the intended impact point. For this test the probe shall be a 20 cm diameter cylindrical bar with the striking end forming the frustum of a right circular cone with the following dimensions: 30 cm height and 2.5 cm diameter at the top with its edge rounded off to a radius of not more than 6 mm. The target on which the specimen is placed shall be as specified in Regulation 82.</p> <p>(b) For <i>packages</i> having a mass of 250 kg or more, the base of the probe shall be placed on a target and the specimen dropped onto the probe. The height of the drop, measured from the point of impact with the specimen to the upper surface of the probe, shall be 3 m. The probe for this test shall have the same properties and dimensions as specified in (a), except that the length and mass of the probe shall be such as to cause maximum damage to the specimen. The target on which the base of the probe is placed shall be as specified in Regulation 82.</p> <p>89(3) Enhanced thermal test: The conditions for this test shall be as specified Regulation 86(3) except that the exposure to the thermal environment shall be for a period of 60 min.</p> <p>89(4). Impact test: The specimen shall be subject to an impact on a target at a velocity of not less than 90 m/s, at such an orientation as to suffer maximum damage. The target shall be as defined in Regulation 82, except that the target surface may be at any orientation as long as the surface is normal to the specimen path.</p>
	<p align="center">SECTION VIII: APPROVAL AND ADMINISTRATIVE REQUIREMENTS</p>
<p>General</p>	<p>90(1). For <i>package designs</i> where it is not required that a <i>competent authority</i> issue a certificate of <i>approval</i>, the</p>

	<p><i>consignor</i> shall, on request, make available for inspection by the relevant <i>competent authority</i>, documentary evidence of the compliance of the <i>package design</i> with all the applicable requirements.</p> <p>90(2). <i>Competent authority approval</i> shall be required for the following:</p> <p>(a) <i>Designs</i> for:</p> <ul style="list-style-type: none"> (i) <i>Special form radioactive material</i> (ii) <i>Low dispersible radioactive material</i> (iii) <i>Fissile material</i> excepted under Regulation. 20(1)(f) (iv) <i>Packages</i> containing 0.1 kg or more of uranium hexafluoride; (v) <i>Packages</i> containing <i>fissile material</i>, unless excepted by Regulation 20(1), 68(2) or 68(3) (vi) <i>Type B(U) packages</i> and <i>Type B(M) packages</i> (vii) <i>Type C packages</i> <p>(b) <i>Special arrangements</i></p> <p>(c) <i>Certain shipments</i></p> <p>(d) <i>Radiation protection programme</i> for special use vessels</p> <p>(e) Calculation of radionuclide values that are not listed in Table 2</p> <p>(f) Calculation of alternative activity limits for an exempt <i>consignment</i> of instruments or articles</p> <p>The certificates of <i>approval</i> for the <i>package design</i> and the <i>shipment</i> may be combined into a single certificate.</p>
<p>Approval Of Special Form Radioactive Material And Low Dispersible Radioactive Material</p>	<p>91(1). The <i>design</i> for <i>special form radioactive material</i> shall require <i>unilateral approval</i>. The <i>design</i> for <i>low dispersible radioactive material</i> shall require <i>multilateral approval</i>. In both cases, an application for <i>approval</i> shall include:</p> <ul style="list-style-type: none"> (a) A detailed description of the <i>radioactive material</i> or, if a capsule, the contents; particular reference shall be made to both physical and chemical states. (b) A detailed statement of the <i>design</i> of any capsule to be used. (c) A statement of the tests that have been carried out and their results, or evidence based on calculations, to show that the <i>radioactive material</i> is capable of meeting the performance standards, or other

	<p>evidence that the <i>special form radioactive material</i> or <i>low dispersible radioactive material</i> meets the applicable requirements of these Regulations.</p> <p>(d) A specification of the applicable <i>management system</i>, as required in Regulation 8.</p> <p>(e) Any proposed pre-shipment actions for use in the <i>consignment of special form radioactive material</i> or <i>low dispersible radioactive material</i>.</p> <p>91(2). The <i>competent authority</i> shall establish a certificate of <i>approval</i> stating that the approved <i>design</i> meets the requirements for <i>special form radioactive material</i> or <i>low dispersible radioactive material</i> and shall attribute to that <i>design</i> an identification mark.</p>
<p>Approval Of Material Excepted From Fissile Classification</p>	<p>92(1). The <i>design</i> for <i>fissile material</i> excepted from “FISSILE” classification in accordance with Table 1, under Regulation 20(1)(f) shall require <i>multilateral approval</i>. An application for <i>approval</i> shall include:</p> <p>(a) A detailed description of the material; particular reference shall be made to both physical and chemical states.</p> <p>(b) A statement of the tests that have been carried out and their results, or evidence based on calculations, to show that the material is capable of meeting the requirements specified in Regulation 57.</p> <p>(c) A specification of the applicable <i>management system</i> as required in Regulation 8</p> <p>(d) A statement of specific actions to be taken prior to <i>shipment</i>.</p> <p>92(2). The <i>competent authority</i> shall establish a certificate of <i>approval</i> stating that the approved material meets the requirements for <i>fissile material</i> excepted by the <i>competent authority</i> in accordance with Regulation 57 and shall attribute to that <i>design</i> an identification mark.</p>
	<p>APPROVAL OF PACKAGE DESIGNS</p>
<p>Approval Of Package Designs Contain Uranium</p>	<p>93. The <i>approval of designs</i> for <i>packages</i> containing 0.1 kg or more of uranium hexafluoride requires that:</p> <p>(a) Each <i>design</i> that meets the requirements of Regulation 63(4) shall require <i>multilateral approval</i>.</p>

Hexafluoride	<p>(b) Each <i>design</i> that meets the requirements of Regulations 63(1)–63(3) shall require <i>unilateral approval</i> by the <i>competent authority</i> of the country of origin of the <i>design</i>, unless <i>multilateral approval</i> is otherwise required by these Regulations.</p> <p>(c) The application for <i>approval</i> shall include all information necessary to satisfy the <i>competent authority</i> that the <i>design</i> meets the requirements of Regulation 63(1) and a specification of the applicable <i>management system</i>, as required in Regulation 8.</p> <p>(d) The <i>competent authority</i> shall establish a certificate of <i>approval</i> stating that the approved <i>design</i> meets the requirements of Regulation 63(1) and shall attribute to that <i>design</i> an identification mark.</p>
Approval Of Type B(U) And Type C Package Designs	<p>94(1). Each <i>Type B(U)</i> and <i>Type C package design</i> shall require <i>unilateral approval</i>, except that:</p> <p>(a) A <i>package design</i> for <i>fissile material</i>, which is also subject to Regulations 96(1)–96(3), shall require <i>multilateral approval</i>.</p> <p>(b) A <i>Type B(U) package design</i> for <i>low dispersible radioactive material</i> shall require <i>multilateral approval</i>.</p> <p>94(2). An application for <i>approval</i> shall include:</p> <p>(a) A detailed description of the proposed <i>radioactive contents</i> with reference to their physical and chemical states and the nature of the radiation emitted.</p> <p>(b) A detailed statement of the <i>design</i>, including complete engineering drawings and schedules of materials and methods of manufacture.</p> <p>(c) A statement of the tests that have been carried out and their results, or evidence based on calculations or other evidence that the <i>design</i> is adequate to meet the applicable requirements.</p> <p>(d) The proposed operating and maintenance instructions for the use of the <i>packaging</i>.</p> <p>(e) If the <i>package</i> is designed to have a <i>maximum normal operating pressure</i> in excess of 100 kPa gauge, a specification of the materials of manufacture of the <i>containment system</i>, the samples to be taken and the tests to be made.</p>

	<p>(f) If the <i>package</i> is to be used for <i>shipment</i> after storage, a justification of considerations to ageing mechanisms in the safety analysis and within the proposed operating and maintenance instructions.</p> <p>(g) Where the proposed <i>radioactive contents</i> are irradiated nuclear fuel, the applicant shall state and justify any assumption in the safety analysis relating to the characteristics of the fuel and describe any pre-shipment measurement required by Regulation 69(2)(b).</p> <p>(h) Any special stowage provisions necessary to ensure the safe dissipation of heat from the <i>package</i> considering the various modes of transport to be used and the type of <i>conveyance</i> or <i>freight container</i>.</p> <p>(i) A reproducible illustration, not larger than 21cm×30cm, showing the make-up of the <i>package</i>.</p> <p>(j) A specification of the applicable <i>management system</i> as required in Regulation 8.</p> <p>(k) For <i>packages</i> which are to be used for <i>shipment</i> after storage, a gap analysis programme describing a systematic procedure for a periodic evaluation of changes of regulations, changes in technical knowledge and changes of the state of the <i>package design</i> during storage.</p> <p>94(3). The <i>competent authority</i> shall establish a certificate of <i>approval</i> stating that the approved <i>design</i> meets the requirements for <i>Type B(U)</i> or <i>Type C packages</i> and shall attribute to that <i>design</i> an identification mark.</p>
Approval Of Type B(M) Package Designs	<p>95(1). Each <i>Type B(M) package design</i>, including those for <i>fissile material</i> which are also subject to Regulations 96(1)–96(3) and those for <i>low dispersible radioactive material</i>, shall require <i>multilateral approval</i>.</p> <p>95(2). An application for <i>approval</i> of a <i>Type B(M) package design</i> shall include, in addition to the information required in Regulation 94(2) for <i>Type B(U) packages</i>:</p> <p>(a) A list of the requirements specified in Regulations 64(5), 65(4)–65(6) and 65(9)–65(15) with which the <i>package</i> does not conform;</p> <p>(b) Any proposed supplementary operational controls to be applied during transport not regularly provided</p>

	<p>for in these Regulations, but which are necessary to ensure the safety of the <i>package</i> or to compensate for the deficiencies listed in (a);</p> <p>(c) A statement relative to any restrictions on the mode of transport and to any special loading, carriage, unloading or handling procedures;</p> <p>(d) A statement of the range of ambient conditions (temperature, solar insolation) that are expected to be encountered during transport and which have been taken into account in the <i>design</i>.</p> <p>95(3). The <i>competent authority</i> shall establish a certificate of <i>approval</i> stating that the approved <i>design</i> meets the applicable requirements for <i>Type B(M) packages</i> and shall attribute to that <i>design</i> an identification mark.</p>
<p>Approval Of Package Designs To Contain Fissile Material</p>	<p>96(1). Each <i>package design</i> for <i>fissile material</i> that is not excepted by any of the Regulations 20(1)(a)–(f), 68(2) and 68(3) shall require <i>multilateral approval</i>.</p> <p>96(2). An application for <i>approval</i> shall include all information necessary to satisfy the <i>competent authority</i> that the <i>design</i> meets the requirements of Regulation 68(1) and a specification of the applicable <i>management system</i>, as required in Regulation 8.</p> <p>96(3). The <i>competent authority</i> shall establish a certificate of <i>approval</i> stating that the approved <i>design</i> meets the requirements of Regulation. 68(1) and shall attribute to that <i>design</i> an identification mark.</p>
<p>Approval Of Alternative Activity Limits For An Exempt Consignment Of Instruments Or Articles</p>	<p>97(1). Alternative activity limits for an exempt <i>consignment</i> of instruments or articles in accordance with Regulation 15(1)(b) shall require <i>multilateral approval</i>. An application for <i>approval</i> shall include:</p> <p>(a) An identification, and a detailed description, of the instrument or article, its intended uses and the radionuclide(s) incorporated;</p> <p>(b) The maximum activity of the radionuclide(s) in the instrument or article;</p> <p>(c) The maximum external <i>dose rate</i> arising from the instrument or article;</p> <p>(d) The chemical and physical forms of the radionuclide(s) contained in the instrument or</p>

	<p>article;</p> <p>(e) Details of the construction and <i>design</i> of the instrument or article, particularly as related to the <i>containment</i> and shielding of the radionuclide in routine, normal and accident conditions of transport;</p> <p>(f) The applicable <i>management system</i>, including the quality testing and verification procedures to be applied to radioactive sources, components and finished products to ensure that the maximum specified activity of <i>radioactive material</i> or the maximum <i>dose rate</i> specified for the instrument or article are not exceeded, and that the instruments or articles are constructed according to the <i>design</i> specifications;</p> <p>(g) The maximum number of instruments or articles expected to be shipped per <i>consignment</i> and annually;</p> <p>(h) Dose assessments in accordance with the principles and methodologies set out in GSR Part 3 including individual doses to transport workers and members of the public and, if appropriate, collective doses arising from routine, normal and accident conditions of transport, based on representative transport scenarios that the <i>consignments</i> are subject to.</p> <p>97(2). The <i>competent authority</i> shall establish a certificate of <i>approval</i> stating that the approved alternative activity limit for an exempt <i>consignment</i> of instruments or articles meets the requirements of Regulation 15(1)(b) and shall attribute to that certificate an identification mark.</p>
<p>Notification And Registration Of Serial Numbers</p>	<p>98. The <i>competent authority</i> shall be informed of the serial number of each <i>packaging</i> manufactured to a <i>design</i> approved under Regulations 94(1), 95(1), 96(1) and 109(2).</p>
<p>Approval Of Shipments</p>	<p>99(1). <i>Multilateral approval</i> shall be required for:</p> <p>(a) The <i>shipment</i> of <i>Type B(M) packages</i> not conforming with the requirements of Regulation 64(5) or designed to allow controlled intermittent venting.</p> <p>(b) The <i>shipment</i> of <i>Type B(M) packages</i> containing <i>radioactive material</i> with an activity greater than 3000A1 or 3000A2, as appropriate, or 1000TBq,</p>

whichever is the lower.

- (c) The *shipment* of *packages* containing *fissile material* if the sum of the *CSIs* of the *packages* in a single *freight container* or in a single *conveyance* exceeds 50. Excluded from this requirement shall be *shipments* by sea-going *vessels* if the sum of the *CSIs* does not exceed 50 for any hold, compartment or *defined deck area* and the distance of 6 m between groups of *packages* or *overpacks*, as required in Table 11, is met.
- (d) *Radiation protection programmes* for *shipments* by special use *vessels* in accordance with Regulation. 49(2)(a).
- (e) The *shipment* of *SCO-III*.

99(2). A *competent authority* may authorize transport *through or into* its country without *shipment approval*, by a specific provision in its *design approval*.

99(3). An application for *approval* of *shipment* shall include:

- (a) The period of time, related to the *shipment*, for which the *approval* is sought;
- (b) The actual *radioactive contents*, the expected modes of transport, the type of *conveyance* and the probable or proposed route;
- (c) The details of how the precautions and administrative or operational controls, referred to in the certificates of *approval* for the *package design*, if applicable, issued under Regulations 94(3), 95(3) and 96(3), are to be put into effect.

99(4). An application for *approval* of *SCO-III shipments* shall include:

- (a) A statement of the respects in which, and of the reasons why, the *consignment* is considered *SCO-III*.
- (b) Justification for choosing *SCO-III* by demonstrating that:
 - (i) No suitable *packaging* currently exists;
 - (ii) Designing and/or constructing a *packaging* or segmenting the object is not practically, technically or economically feasible;

	<p>(iii) No other viable alternative exists.</p> <p>(c) A detailed description of the proposed <i>radioactive contents</i> with reference to their physical and chemical states and the nature of the radiation emitted.</p> <p>(d) A detailed statement of the <i>design</i> of the <i>SCO-III</i>, including complete engineering drawings and schedules of materials and methods of manufacture.</p> <p>(e) All information necessary to satisfy the <i>competent authority</i> that the requirements of Regulation 32(4)(e) and the requirements of Regulation. 32(6), if applicable, are satisfied.</p> <p>(f) A transport plan.</p> <p>(g) A specification of the applicable <i>management system</i> as required in Regulation 8.</p> <p>99(5). Upon <i>approval</i> of the <i>shipment</i>, the <i>competent authority</i> shall issue a certificate of <i>approval</i>.</p>
<p>Approval Of Shipments Under Special Arrangement</p>	<p>100(1). Each <i>consignment</i> transported under <i>special arrangement</i> shall require <i>multilateral approval</i>.</p> <p>100(2). An application for <i>approval</i> of <i>shipments</i> under <i>special arrangement</i> shall include all the information necessary to satisfy the <i>competent authority</i> that the overall level of safety in transport is at least equivalent to that which would be provided if all the applicable requirements of these Regulations had been met. The application shall also include:</p> <p>(a) A statement of the respects in which, and of the reasons why, the <i>shipment</i> cannot be made in full accordance with the applicable requirements;</p> <p>(b) A statement of any special precautions or special administrative or operational controls that are to be employed during transport to compensate for the failure to meet the applicable requirements.</p> <p>100(3). Upon <i>approval</i> of <i>shipments</i> under <i>special arrangement</i>, the <i>competent authority</i> shall issue a certificate of <i>approval</i>.</p>
	<p>COMPETENT AUTHORITY CERTIFICATES OF APPROVAL</p>

<p>Competent Authority Identification Marks</p>	<p>101(1). Each certificate of <i>approval</i> issued by a <i>competent authority</i> shall be assigned an identification mark. The mark shall be of the following generalized type:</p> <p>VRI/Number/Type code</p> <p>(a) Except as provided in Regulation 101(2)(b), VRI represents the international <i>vehicle</i> registration identification code of the country issuing the certificate.</p> <p>(b) The number shall be assigned by the <i>competent authority</i> and shall be unique and specific with regard to the particular <i>design, shipment</i> or alternative activity limit for exempt <i>consignment</i>. The identification mark of the <i>approval of shipment</i> shall be clearly related to the identification mark of the <i>approval of design</i>.</p> <p>(c) The following type codes shall be used in the order listed to indicate the types of certificate of <i>approval</i> issued:</p> <p><i>AF Type A package design for fissile material</i> <i>B(U) Type B(U) package design (B(U)F if for fissile material)</i> <i>B(M) Type B(M) package design (B(M)F if for fissile material)</i> <i>C Type C package design (CF if for fissile material)</i> <i>IF Industrial package design for fissile material</i> <i>S Special form radioactive material</i> <i>LD Low dispersible radioactive material</i> <i>FE Fissile material complying with the requirements of Regulation 57</i> <i>T Shipment</i> <i>X Special arrangement</i> AL Alternative activity limits for an exempt <i>consignment</i> of instruments or articles</p> <p>101(2).In the case of <i>package designs</i> for non-fissile or fissile-excepted uranium hexafluoride, where none of the above codes apply, the following type codes shall be used:</p> <p><i>H(U) Unilateral approval</i> <i>H(M) Multilateral approval.</i></p>

833. These identification marks shall be applied as follows:

(a) Each certificate and each *package* shall bear the appropriate identification mark comprising the symbols prescribed in Regulation 101(1)(a)–(c), except that, for *packages*, only the applicable *design* type codes shall appear following the second stroke, that is, the “T” or “X” shall not appear in the identification mark on the *package*. Where the *approval* of *design* and the *approval* of *shipment* are combined, the applicable type codes do not need to be repeated. For example:

A/132/B(M)F: A *Type B(M) package design* approved for *fissile material*, requiring *multilateral approval*, for which the *competent authority* of Austria has assigned the *design* number 132 (to be marked both on the *package* and on the certificate of *approval* for the *package design*)

A/132/B(M)FT: The *approval* of *shipment* issued for a *package* bearing the identification mark elaborated above (to be marked on the certificate only)

A/137/X: An *approval* of *special arrangement* issued by the *competent authority* of Austria, to which the number 137 has been assigned (to be marked on the certificate only)

A/139/IF: An *industrial package design* for *fissile material* approved by the *competent authority* of Austria, to which *package design* number 139 has been assigned (to be marked both on the *package* and on the certificate of *approval* for the *package design*)

A/145/H(U): A *package design* for fissile-excepted uranium hexafluoride approved by the *competent authority* of Austria, to which *package design* number 145 has been assigned (to be marked both on the *package* and on the certificate of *approval* for the *package design*).

(b) Where *multilateral approval* is effected by validation

	<p>in accordance with Regulation 108, only the identification mark issued by the country of origin of the <i>design</i> or <i>shipment</i> shall be used. Where <i>multilateral approval</i> is effected by issue of certificates by successive countries, each certificate shall bear the appropriate identification mark and the <i>package</i> whose <i>design</i> was so approved shall bear all appropriate identification marks.</p> <p>For example: A/132/B(M)F CH/28/B(M)F</p> <p>would be the identification mark of a <i>package</i> that was originally approved by Austria and was subsequently approved, by separate certificate, by Switzerland. Additional identification marks would be tabulated in a similar manner on the <i>package</i>.</p> <p>(c) The revision of a certificate shall be indicated by a parenthetical expression following the identification mark on the certificate. For example, A/132/B(M)F (Rev. 2) would indicate revision 2 of the Austrian certificate of <i>approval</i> for the <i>package design</i>; or A/132/B(M)F (Rev. 0) would indicate the original issuance of the Austrian certificate of <i>approval</i> for the <i>package design</i>. For original issuances, the parenthetical entry is optional and other words such as “original issuance” may also be used in place of “Rev. 0”. Certificate revision numbers may only be issued by the country issuing the original certificate of <i>approval</i>.</p> <p>(d) Additional symbols (as may be necessitated by national requirements) may be added in brackets to the end of the identification mark, for example, A/132/B(M)F (SP503).</p> <p>(e) It is not necessary to alter the identification mark on the <i>packaging</i> each time that a revision to the <i>design</i> certificate is made. Such re-marking shall be required only in those cases where the revision to the <i>package design</i> certificate involves a change in the letter type codes for the <i>package design</i> following the second stroke.</p>
	CONTENTS OF CERTIFICATES OF APPROVAL
Certificates Of	102. Each certificate of <i>approval</i> issued by a <i>competent authority</i> for <i>special form radioactive material</i> or <i>low</i>

<p>Approval For Special Form Radioactive Material And Low Dispersible Radioactive Material</p>	<p><i>dispersible radioactive material</i> shall include the following information:</p> <ul style="list-style-type: none"> (a) Type of certificate; (b) The <i>competent authority</i> identification mark; (c) The issue date and an expiry date; (d) A list of applicable national and international regulations, including the edition of the IAEA Regulations for the Safe Transport of Radioactive Material under which the <i>special form radioactive material</i> or <i>low dispersible radioactive material</i> is approved; (e) The identification of the <i>special form radioactive material</i> or <i>low dispersible radioactive material</i>; (f) A description of the <i>special form radioactive material</i> or <i>low dispersible radioactive material</i>; (g) <i>Design</i> specifications for the <i>special form radioactive material</i> or <i>low dispersible radioactive material</i>, which may include references to drawings; (h) A specification of the <i>radioactive contents</i> that includes the activities involved and which may include the physical and chemical forms; (i) A specification of the applicable <i>management system</i>, as required in Regulation 8; (j) Reference to information provided by the applicant relating to specific actions to be taken prior to <i>shipment</i>; (k) If deemed appropriate by the <i>competent authority</i>, reference to the identity of the applicant; (l) Signature and identification of the certifying official.
<p>Certificates Of Approval For Material Excepted From Fissile Classification</p>	<p>103. Each certificate of <i>approval</i> issued by a <i>competent authority</i> for material excepted from classification as “FISSILE” shall include the following information:</p> <ul style="list-style-type: none"> (a) Type of certificate; (b) The <i>competent authority</i> identification mark; (c) The issue date and an expiry date; (d) A list of applicable national and international regulations, including the edition of the IAEA Regulations for the Safe Transport of Radioactive Material under which the exception is approved; (e) A description of the excepted material; (f) Limiting specifications for the excepted material; (g) A specification of the applicable <i>management system</i>,

	<p>as required in Regulation 8;</p> <p>(h) Reference to information provided by the applicant relating to specific actions to be taken prior to <i>shipment</i>;</p> <p>(i) If deemed appropriate by the <i>competent authority</i>, reference to the identity of the applicant;</p> <p>(j) Signature and identification of the certifying official;</p> <p>(k) Reference to documentation that demonstrates compliance with Regulation 57.</p>
<p>Certificates Of Approval For Special Arrangement</p>	<p>104. Each certificate of <i>approval</i> issued by a <i>competent authority</i> for a <i>special arrangement</i> shall include the following information:</p> <p>(a) Type of certificate.</p> <p>(b) The <i>competent authority</i> identification mark.</p> <p>(c) The issue date and an expiry date.</p> <p>(d) Mode(s) of transport.</p> <p>(e) Any restrictions on the modes of transport, type of <i>conveyance</i>, <i>freight container</i> and any necessary routeing instructions.</p> <p>(f) A list of applicable national and international regulations, including the edition of the IAEA Regulations for the Safe Transport of Radioactive Material under which the <i>special arrangement</i> is approved.</p> <p>(g) The following statement: “This certificate does not relieve the <i>consignor</i> from compliance with any requirement of the government of any country <i>through or into</i> which the <i>package</i> will be transported”.</p> <p>(h) References to certificates for alternative <i>radioactive contents</i>, other <i>competent authority</i> validation, or additional technical data or information, as deemed appropriate by the <i>competent authority</i>.</p> <p>(i) Description of the <i>packaging</i> by reference to the drawings or a specification of the <i>design</i>. If deemed appropriate by the <i>competent authority</i>, a reproducible illustration not larger than 21 cm × 30 cm, showing the make-up of the <i>package</i>, should also be provided, accompanied by a brief description of the <i>packaging</i>, including materials of manufacture, gross mass, general external dimensions and appearance.</p> <p>(j) A specification of the authorized <i>radioactive contents</i>, including any restrictions on the <i>radioactive</i></p>

contents that might not be obvious from the nature of the *packaging*. This specification shall include the physical and chemical forms, the activities involved (including those of the various isotopes, if appropriate), mass in grams (for *fissile material* or for each *fissile nuclide*, when appropriate) and whether the *special arrangement* is for *special form radioactive material*, *low dispersible radioactive material* or *fissile material* excepted under Regulation 20(1)(f), if applicable.

- (k) Additionally, for *packages* containing *fissile material*:
- (i) A detailed description of the authorized *radioactive contents*;
 - (ii) The value of the *CSI*;
 - (iii) Reference to the documentation that demonstrates the criticality safety of the *package*;
 - (iv) Any special features on the basis of which the absence of water from certain void spaces has been assumed in the criticality assessment;
 - (v) Any allowance (based on Regulation 69(2)(b)) for a change in neutron multiplication assumed in the criticality assessment as a result of actual irradiation experience;
 - (vi) The ambient temperature range for which the *special arrangement* has been approved.
- (l) A detailed listing of any supplementary operational controls required for preparation, loading, carriage, unloading and handling of the *consignment*, including any special stowage provisions for the safe dissipation of heat.
- (m) If deemed appropriate by the *competent authority*, reasons for the *special arrangement*.
- (n) Description of the compensatory measures to be applied as a result of the *shipment* being under *special arrangement*.
- (o) Reference to information provided by the applicant relating to the use of the *packaging* or specific actions to be taken prior to the *shipment*.
- (p) A statement regarding the ambient conditions assumed for purposes of *design* if these are not in accordance with those specified in Regulations 65(5), 65(6) and 65(15), as applicable.
- (q) Any emergency arrangements deemed necessary by the *competent authority*.

	<ul style="list-style-type: none"> (r) A specification of the applicable <i>management system</i>, as required in Regulation 8. (s) If deemed appropriate by the <i>competent authority</i>, reference to the identity of the applicant and to the identity of the <i>carrier</i>. (t) Signature and identification of the certifying official.
<p>Certificates Of Approval For Shipments</p>	<p>105. Each certificate of <i>approval</i> for a <i>shipment</i> issued by a <i>competent authority</i> shall include the following information:</p> <ul style="list-style-type: none"> (a) Type of certificate. (b) The <i>competent authority</i> identification mark(s). (c) The issue date and an expiry date. (d) A list of applicable national and international regulations, including the edition of the IAEA Regulations for the Safe Transport of Radioactive Material under which the <i>shipment</i> is approved. (e) Any restrictions on the modes of transport, type of <i>conveyance</i>, <i>freight container</i> and any necessary routing instructions. (f) The following statement: “This certificate does not relieve the <i>consignor</i> from compliance with any requirement of the government of any country <i>through or into</i> which the <i>package</i> will be transported”. (g) A detailed listing of any supplementary operational controls required for preparation, loading, carriage, unloading and handling of the <i>consignment</i>, including any special stowage provisions for the safe dissipation of heat or maintenance of criticality safety. (h) Reference to information provided by the applicant relating to specific actions to be taken prior to <i>shipment</i>. (i) Reference to the applicable certificate(s) of <i>approval of design</i>. (j) A specification of the actual <i>radioactive contents</i>, including any restrictions on the <i>radioactive contents</i> that might not be obvious from the nature of the <i>packaging</i>. This specification shall include the physical and chemical forms, the total activities involved (including those of the various isotopes, if appropriate), mass in grams (for <i>fissile material</i> or for each <i>fissile nuclide</i>, when appropriate) and

	<p>whether the <i>shipment</i> is for <i>special form radioactive material, low dispersible radioactive material</i> or <i>fissile material</i> excepted under Regulation 20(1)(f), if applicable.</p> <p>(k) Any emergency arrangements deemed necessary by the <i>competent authority</i>.</p> <p>(l) A specification of the applicable <i>management system</i>, as required in Regulation 8.</p> <p>(m) If deemed appropriate by the <i>competent authority</i>, reference to the identity of the applicant.</p> <p>(n) Signature and identification of the certifying official.</p>
<p>Certificates Of Approval For Package Design</p>	<p>106. Each certificate of <i>approval</i> of the <i>design</i> of a <i>package</i> issued by a <i>competent authority</i> shall include the following information:</p> <p>(a) Type of certificate.</p> <p>(b) The <i>competent authority</i> identification mark.</p> <p>(c) The issue date and an expiry date.</p> <p>(d) Any restriction on the modes of transport, if appropriate.</p> <p>(e) A list of applicable national and international regulations, including the edition of the IAEA Regulations for the Safe Transport of Radioactive Material under which the <i>design</i> is approved.</p> <p>(f) The following statement: “This certificate does not relieve the <i>consignor</i> from compliance with any requirement of the government of any country <i>through or into</i> which the <i>package</i> will be transported”.</p> <p>(g) References to certificates for alternative <i>radioactive contents</i>, other <i>competent authority</i> validation, or additional technical data or information, as deemed appropriate by the <i>competent authority</i>.</p> <p>(h) A statement authorizing <i>shipment</i>, where <i>approval</i> of <i>shipment</i> is required under Regulation 99(1), if deemed appropriate.</p> <p>(i) Identification of the <i>packaging</i>.</p> <p>(j) Description of the <i>packaging</i> by reference to the drawings or specification of the <i>design</i>. If deemed appropriate by the <i>competent authority</i>, a reproducible illustration not larger than 21 cm × 30 cm, showing the make-up of the <i>package</i>, should also be provided, accompanied by a brief description of the <i>packaging</i>, including materials of</p>

manufacture, gross mass, general external dimensions and appearance.

- (k) Specification of the *design* by reference to the drawings.
- (l) A specification of the authorized *radioactive contents*, including any restrictions on the *radioactive contents* that might not be obvious from the nature of the *packaging*. This specification shall include the physical and chemical forms, the activities involved (including those of the various isotopes, if appropriate), the mass in grams (for *fissile material*, the total mass of *fissile nuclides* or the mass for each *fissile nuclide*, when appropriate) and whether the *package design* is for *special form radioactive material*, *low dispersible radioactive material* or *fissile material* excepted under Regulation 20(1)(f), if applicable.
- (m) A description of the *containment system*.
- (n) For *package designs* containing *fissile material* that require *multilateral approval* of the *package design* in accordance with Regulation 96(1):
 - (i) A detailed description of the authorized *radioactive contents*;
 - (ii) A description of the *confinement system*;
 - (iii) The value of the *CSI*;
 - (iv) Reference to the documentation that demonstrates the criticality safety of the *package*;
 - (v) Any special features on the basis of which the absence of water from certain void spaces has been assumed in the criticality assessment;
 - (vi) Any allowance (based on Regulation 69(2)(b)) for a change in neutron multiplication assumed in the criticality assessment as a result of actual irradiation experience;
 - (vii) The ambient temperature range for which the *package design* has been approved.
- o) For *Type B(M) packages*, a statement specifying those prescriptions of Regulations 64(5), 65(4)–65(6) and 65(9)–65(15) with which the *package* does not conform and any amplifying information that may be useful to other *competent authorities*.
- (p) For *package designs* subject to Regulation 109(2), a statement specifying those requirements of the current

	<p>regulations with which the <i>package</i> does not conform.</p> <p>(q) For <i>packages</i> containing more than 0.1 kg of uranium hexafluoride, a statement specifying those prescriptions of Regulation 63(4) that apply, if any, and any amplifying information that may be useful to other <i>competent authorities</i>.</p> <p>(r) A detailed listing of any supplementary operational controls required for preparation, loading, carriage, unloading and handling of the <i>consignment</i>, including any special stowage provisions for the safe dissipation of heat.</p> <p>(s) Reference to information provided by the applicant relating to the use of the <i>packaging</i> or to specific actions to be taken prior to <i>shipment</i>.</p> <p>(t) A statement regarding the ambient conditions assumed for purposes of <i>design</i>, if these are not in accordance with those specified in Regulations 65(4), 65(6) and 65(15), as applicable.</p> <p>(u) A specification of the applicable <i>management system</i>, as required in Regulation 8.</p> <p>(v) Any emergency arrangements deemed necessary by the <i>competent authority</i>.</p> <p>(w) If deemed appropriate by the <i>competent authority</i>, reference to the identity of the applicant.</p> <p>(x) Signature and identification of the certifying official.</p>
<p>Certificates Of Approval For Alternative Activity Limits For An Exempt Consignment Of Instruments Or Articles</p>	<p>107. Each certificate issued by a <i>competent authority</i> for alternative activity limits for an exempt <i>consignment</i> of instruments or articles according to Regulation 97(2) shall include the following information:</p> <p>(a) Type of certificate;</p> <p>(b) The <i>competent authority</i> identification mark;</p> <p>(c) The issue date and an expiry date;</p> <p>(d) List of applicable national and international regulations, including the edition of the IAEA Regulations for the Safe Transport of Radioactive Material under which the exemption is approved;</p> <p>(e) The identification of the instrument or article;</p> <p>(f) A description of the instrument or article;</p> <p>(g) <i>Design</i> specifications for the instrument or article;</p> <p>(h) A specification of the radionuclide(s) and the approved alternative activity limit(s) for the exempt <i>consignment(s)</i> of the instrument(s) or article(s);</p> <p>(i) Reference to documentation that demonstrates</p>

	<p>compliance with Regulation 15(1)(b);</p> <p>(j) If deemed appropriate by the <i>competent authority</i>, reference to the identity of the applicant;</p> <p>(k) Signature and identification of the certifying official.</p>
Validation Of Certificates	<p>108. <i>Multilateral approval</i> may be by validation of the original certificate issued by the <i>competent authority</i> of the country of origin of the <i>design</i> or <i>shipment</i>. Such validation may take the form of an endorsement on the original certificate or the issuance of a separate endorsement, annex, supplement, etc., by the <i>competent authority</i> of the country <i>through or into</i> which the <i>shipment</i> is made.</p>

SCHEDULES

[FIRST SCHEDULE:] LIST OF TABLES

- Table 1. Excerpts from the list of UN numbers, proper shipping names and descriptions
- Table 2. Basic radionuclide values
- Table 3. Basic radionuclide values for unknown radionuclides or mixtures
- Table 4. Activity limits for excepted packages
- Table 5. Industrial package requirements for LSA material, SCO-I and SCO-II
- Table 6. Conveyance activity limits for LSA material and SCO in industrial packages or unpackaged. .
- Table 7. Multiplication factors for tanks, freight containers and unpackaged LSA-I, SCO-I and SCO-III .

Table 8.	Categories of packages, overpacks and freight containers
Table 9.	UN marking for packages and overpacks
Table 10.	Transport index limits for freight containers and conveyances not under exclusive use
Table 11.	CSI limits for freight containers and conveyances containing fissile material ..
Table 12.	Insolation data
Table 13.	Values of Z for calculation of CSI in accordance with Regulation 68(2).
Table 14.	Free drop distance for testing packages to normal conditions of transport .

FIRST SCHEDULE: Tables and Figures.

TABLE 1. EXCERPTS FROM THE LIST OF UN NUMBERS, PROPER SHIPPING NAMES AND DESCRIPTIONS

Assignment of UN numbers	PROPER SHIPPING NAME and description ^a
<i>Excepted package</i>	
UN 2908	RADIOACTIVE MATERIAL, EXCEPTED PACKAGE — EMPTY PACKAGING
UN 2909	RADIOACTIVE MATERIAL, EXCEPTED PACKAGE — ARTICLES MANUFACTURED FROM NATURAL URANIUM or DEPLETED URANIUM or NATURAL THORIUM
UN 2910	RADIOACTIVE MATERIAL, EXCEPTED PACKAGE — LIMITED QUANTITY OF MATERIAL
UN 2911	RADIOACTIVE MATERIAL, EXCEPTED PACKAGE — INSTRUMENTS or ARTICLES
UN 3507	URANIUM HEXAFLUORIDE, RADIOACTIVE MATERIAL, EXCEPTED PACKAGE, less than 0.1 kg per package, non-fissile or fissile-excepted ^b
<i>Low specific activity material</i>	
UN 2912	RADIOACTIVE MATERIAL, LOW SPECIFIC ACTIVITY (LSA-I), non-fissile or fissile-excepted ^b
UN 3321	RADIOACTIVE MATERIAL, LOW SPECIFIC ACTIVITY (LSA-II), non-fissile or fissile-excepted ^b
UN 3322	RADIOACTIVE MATERIAL, LOW SPECIFIC ACTIVITY

UN 3324	(LSA-III), non-fissile or fissile-excepted ^b RADIOACTIVE MATERIAL, LOW SPECIFIC ACTIVITY (LSA-II), FISSILE
UN 3325	RADIOACTIVE MATERIAL, LOW SPECIFIC ACTIVITY (LSA-III), FISSILE

Surface contaminated objects

UN 2913	RADIOACTIVE MATERIAL, SURFACE CONTAMINATED OBJECTS (SCO-I, SCO-II or SCO-III), non-fissile or fissile-excepted ^b
UN 3326	RADIOACTIVE MATERIAL, SURFACE CONTAMINATED OBJECTS (SCO-I or SCO-II), FISSILE

Type A package

UN 2915	RADIOACTIVE MATERIAL, TYPE A PACKAGE, non-special form, non-fissile or fissile-excepted ^b
UN 3327	RADIOACTIVE MATERIAL, TYPE A PACKAGE, FISSILE, non-special form

ACTIVITY LIMITS AND CLASSIFICATION

TABLE 1. EXCERPTS FROM THE LIST OF UN NUMBERS, PROPER SHIPPING NAMES AND DESCRIPTIONS (cont.)

Assignment of UN numbers	PROPER SHIPPING NAME and description ^a
UN 3332	RADIOACTIVE MATERIAL, TYPE A PACKAGE, SPECIAL FORM, non-fissile or fissile-excepted ^b
UN 3333	RADIOACTIVE MATERIAL, TYPE A PACKAGE, SPECIAL FORM, FISSILE
<i>Type B(U) package</i>	
UN 2916	RADIOACTIVE MATERIAL, TYPE B(U) PACKAGE, non-fissile or fissile-excepted ^b
UN 3328	RADIOACTIVE MATERIAL, TYPE B(U) PACKAGE, FISSILE
<i>Type B(M) package</i>	
UN 2917	RADIOACTIVE MATERIAL, TYPE B(M) PACKAGE, non-fissile or fissile-excepted ^b
UN 3329	RADIOACTIVE MATERIAL, TYPE B(M) PACKAGE, FISSILE
<i>Type C package</i>	
UN 3323	RADIOACTIVE MATERIAL, TYPE C PACKAGE, non-fissile or fissile-excepted ^b
UN 3330	RADIOACTIVE MATERIAL, TYPE C PACKAGE, FISSILE
<i>Special arrangement</i>	
UN 2919	RADIOACTIVE MATERIAL, TRANSPORTED UNDER SPECIAL ARRANGEMENT, non-fissile or fissile-excepted ^b
UN 3331	RADIOACTIVE MATERIAL, TRANSPORTED UNDER SPECIAL ARRANGEMENT, FISSILE
<i>Uranium hexafluoride</i>	
UN 2977	RADIOACTIVE MATERIAL, URANIUM HEXAFLUORIDE, FISSILE
UN 2978	RADIOACTIVE MATERIAL, URANIUM HEXAFLUORIDE, non-fissile or fissile-excepted ^b

^aThe "PROPER SHIPPING NAME" is found in the column "PROPER SHIPPING NAME and description" and is restricted to that part shown in CAPITAL LETTERS. In the cases of UN 2909, UN 2911, UN 2913 and UN 3326, where alternative proper shipping names are separated by the word "or", only the relevant proper shipping name shall be used.

^bThe term 'fissile-excepted' refers only to material excepted under Regulation 20(1).

TABLE 2. BASIC RADIONUCLIDE VALUES

Radionuclide (atomic number)	A_1 (TBq)	A_2 (TBq)	Activity concentration limit for exempt material (Bq/g)	Activity limit for an exempt <i>consignment</i> (Bq)
Actinium (89)				
Ac-225 (a)	8×10^{-1}	6×10^{-3}	1×10^1	1×10^4
Ac-227 (a)	9×10^{-1}	9×10^{-5}	1×10^{-1}	1×10^3
Ac-228	6×10^{-1}	5×10^{-1}	1×10^1	1×10^6
Silver (47)				
Ag-105	2×10^0	2×10^0	1×10^2	1×10^6
Ag-108m (a)	7×10^{-1}	7×10^{-1}	1×10^1 (b)	1×10^6 (b)
Ag-110m (a)	4×10^{-1}	4×10^{-1}	1×10^1	1×10^6
Ag-111	2×10^0	6×10^{-1}	1×10^3	1×10^6
Aluminium (13)				
Al-26	1×10^{-1}	1×10^{-1}	1×10^1	1×10^5
Americium (95)				
Am-241	1×10^1	1×10^{-3}	1×10^0	1×10^4
Am-242m (a)	1×10^1	1×10^{-3}	1×10^0 (b)	1×10^4 (b)
Am-243 (a)	5×10^0	1×10^{-3}	1×10^0 (b)	1×10^3 (b)
Argon (18)				
Ar-37	4×10^1	4×10^1	1×10^6	1×10^8
Ar-39	4×10^1	2×10^1	1×10^7	1×10^4
Ar-41	3×10^{-1}	3×10^{-1}	1×10^2	1×10^9
Arsenic (33)				
As-72	3×10^{-1}	3×10^{-1}	1×10^1	1×10^5
As-73	4×10^1	4×10^1	1×10^3	1×10^7
As-74	1×10^0	9×10^{-1}	1×10^1	1×10^6
As-76	3×10^{-1}	3×10^{-1}	1×10^2	1×10^5
As-77	2×10^1	7×10^{-1}	1×10^3	1×10^6
Astatine (85)				
At-211 (a)	2×10^1	5×10^{-1}	1×10^3	1×10^7

For footnotes see pp. 42–45

SECTION IV

TABLE 2. BASIC RADIONUCLIDE VALUES (cont.)

Radionuclide (atomic number)	A_1 (TBq)	A_2 (TBq)	Activity concentration limit for exempt material (Bq/g)	Activity limit for an exempt <i>consignment</i> (Bq)
Gold (79)				
Au-193	7×10^0	2×10^0	1×10^2	1×10^7
Au-194	1×10^0	1×10^0	1×10^1	1×10^6
Au-195	1×10^1	6×10^0	1×10^2	1×10^7
Au-198	1×10^0	6×10^{-1}	1×10^2	1×10^6
Au-199	1×10^1	6×10^{-1}	1×10^2	1×10^6
Barium (56)				
Ba-131 (a)	2×10^0	2×10^0	1×10^2	1×10^6
Ba-133	3×10^0	3×10^0	1×10^2	1×10^6
Ba-133m	2×10^1	6×10^{-1}	1×10^2	1×10^6
Ba-135m	2×10^1	6×10^{-1}	1×10^2	1×10^6
Ba-140 (a)	5×10^{-1}	3×10^{-1}	1×10^1 (b)	1×10^5 (b)
Beryllium (4)				
Be-7	2×10^1	2×10^1	1×10^3	1×10^7
Be-10	4×10^1	6×10^{-1}	1×10^4	1×10^6
Bismuth (83)				
Bi-205	7×10^{-1}	7×10^{-1}	1×10^1	1×10^6
Bi-206	3×10^{-1}	3×10^{-1}	1×10^1	1×10^5
Bi-207	7×10^{-1}	7×10^{-1}	1×10^1	1×10^6
Bi-210	1×10^0	6×10^{-1}	1×10^3	1×10^6
Bi-210m (a)	6×10^{-1}	2×10^{-2}	1×10^1	1×10^5
Bi-212 (a)	7×10^{-1}	6×10^{-1}	1×10^1 (b)	1×10^5 (b)
Berkelium (97)				
Bk-247	8×10^0	8×10^{-4}	1×10^0	1×10^4
Bk-249 (a)	4×10^1	3×10^{-1}	1×10^3	1×10^6
Bromine (35)				
Br-76	4×10^{-1}	4×10^{-1}	1×10^1	1×10^5
Br-77	3×10^0	3×10^0	1×10^2	1×10^6

For footnotes see pp. 42-45

ACTIVITY LIMITS AND CLASSIFICATION

TABLE 2. BASIC RADIONUCLIDE VALUES (cont.)

Radionuclide (atomic number)	A_1 (TBq)	A_2 (TBq)	Activity concentration limit for exempt material (Bq/g)	Activity limit for an exempt <i>consignment</i> (Bq)
Br-82	4×10^{-1}	4×10^{-1}	1×10^1	1×10^6
Carbon (6)				
C-11	1×10^0	6×10^{-1}	1×10^1	1×10^6
C-14	4×10^1	3×10^0	1×10^4	1×10^7
Calcium (20)				
Ca-41	Unlimited	Unlimited	1×10^5	1×10^7
Ca-45	4×10^1	1×10^0	1×10^4	1×10^7
Ca-47 (a)	3×10^0	3×10^{-1}	1×10^1	1×10^6
Cadmium (48)				
Cd-109	3×10^1	2×10^0	1×10^4	1×10^6
Cd-113m	4×10^1	5×10^{-1}	1×10^3	1×10^6
Cd-115 (a)	3×10^0	4×10^{-1}	1×10^2	1×10^6
Cd-115m	5×10^{-1}	5×10^{-1}	1×10^3	1×10^6
Cerium (58)				
Ce-139	7×10^0	2×10^0	1×10^2	1×10^6
Ce-141	2×10^1	6×10^{-1}	1×10^2	1×10^7
Ce-143	9×10^{-1}	6×10^{-1}	1×10^2	1×10^6
Ce-144 (a)	2×10^{-1}	2×10^{-1}	1×10^2 (b)	1×10^5 (b)
Californium (98)				
Cf-248	4×10^1	6×10^{-3}	1×10^1	1×10^4
Cf-249	3×10^0	8×10^{-4}	1×10^0	1×10^3
Cf-250	2×10^1	2×10^{-3}	1×10^1	1×10^4
Cf-251	7×10^0	7×10^{-4}	1×10^0	1×10^3
Cf-252	1×10^{-1}	3×10^{-3}	1×10^1	1×10^4
Cf-253 (a)	4×10^1	4×10^{-2}	1×10^2	1×10^5
Cf-254	1×10^{-3}	1×10^{-3}	1×10^0	1×10^3
Chlorine (17)				
Cl-36	1×10^1	6×10^{-1}	1×10^4	1×10^6

For footnotes see pp. 42-45

SECTION IV

TABLE 2. BASIC RADIONUCLIDE VALUES (cont.)

Radionuclide (atomic number)	A_1 (TBq)	A_2 (TBq)	Activity concentration limit for exempt material (Bq/g)	Activity limit for an exempt <i>consignment</i> (Bq)
Cl-38	2×10^{-1}	2×10^{-1}	1×10^1	1×10^5
Curium (96)				
Cm-240	4×10^1	2×10^{-2}	1×10^2	1×10^5
Cm-241	2×10^0	1×10^0	1×10^2	1×10^6
Cm-242	4×10^1	1×10^{-2}	1×10^2	1×10^5
Cm-243	9×10^0	1×10^{-3}	1×10^0	1×10^4
Cm-244	2×10^1	2×10^{-3}	1×10^1	1×10^4
Cm-245	9×10^0	9×10^{-4}	1×10^0	1×10^3
Cm-246	9×10^0	9×10^{-4}	1×10^0	1×10^3
Cm-247 (a)	3×10^0	1×10^{-3}	1×10^0	1×10^4
Cm-248	2×10^{-2}	3×10^{-4}	1×10^0	1×10^3
Cobalt (27)				
Co-55	5×10^{-1}	5×10^{-1}	1×10^1	1×10^6
Co-56	3×10^{-1}	3×10^{-1}	1×10^1	1×10^5
Co-57	1×10^1	1×10^1	1×10^2	1×10^6
Co-58	1×10^0	1×10^0	1×10^1	1×10^6
Co-58m	4×10^1	4×10^1	1×10^4	1×10^7
Co-60	4×10^{-1}	4×10^{-1}	1×10^1	1×10^5
Chromium (24)				
Cr-51	3×10^1	3×10^1	1×10^3	1×10^7
Caesium (55)				
Cs-129	4×10^0	4×10^0	1×10^2	1×10^5
Cs-131	3×10^1	3×10^1	1×10^3	1×10^6
Cs-132	1×10^0	1×10^0	1×10^1	1×10^5
Cs-134	7×10^{-1}	7×10^{-1}	1×10^1	1×10^4
Cs-134m	4×10^1	6×10^{-1}	1×10^3	1×10^5
Cs-135	4×10^1	1×10^0	1×10^4	1×10^7
Cs-136	5×10^{-1}	5×10^{-1}	1×10^1	1×10^5

For footnotes see pp. 42-45

ACTIVITY LIMITS AND CLASSIFICATION

TABLE 2. BASIC RADIONUCLIDE VALUES (cont.)

Radionuclide (atomic number)	A_1 (TBq)	A_2 (TBq)	Activity concentration limit for exempt material (Bq/g)	Activity limit for an exempt <i>consignment</i> (Bq)
Cs-137 (a)	2×10^0	6×10^{-1}	1×10^1 (b)	1×10^4 (b)
Copper (29)				
Cu-64	6×10^0	1×10^0	1×10^2	1×10^6
Cu-67	1×10^1	7×10^{-1}	1×10^2	1×10^6
Dysprosium (66)				
Dy-159	2×10^1	2×10^1	1×10^3	1×10^7
Dy-165	9×10^{-1}	6×10^{-1}	1×10^3	1×10^6
Dy-166 (a)	9×10^{-1}	3×10^{-1}	1×10^3	1×10^6
Erbium (68)				
Er-169	4×10^1	1×10^0	1×10^4	1×10^7
Er-171	8×10^{-1}	5×10^{-1}	1×10^2	1×10^6
Europium (63)				
Eu-147	2×10^0	2×10^0	1×10^2	1×10^6
Eu-148	5×10^{-1}	5×10^{-1}	1×10^1	1×10^6
Eu-149	2×10^1	2×10^1	1×10^2	1×10^7
Eu-150 (short lived)	2×10^0	7×10^{-1}	1×10^3	1×10^6
Eu-150 (long lived)	7×10^{-1}	7×10^{-1}	1×10^1	1×10^6
Eu-152	1×10^0	1×10^0	1×10^1	1×10^6
Eu-152m	8×10^{-1}	8×10^{-1}	1×10^2	1×10^6
Eu-154	9×10^{-1}	6×10^{-1}	1×10^1	1×10^6
Eu-155	2×10^1	3×10^0	1×10^2	1×10^7
Eu-156	7×10^{-1}	7×10^{-1}	1×10^1	1×10^6
Fluorine (9)				
F-18	1×10^0	6×10^{-1}	1×10^1	1×10^6
Iron (26)				
Fe-52 (a)	3×10^{-1}	3×10^{-1}	1×10^1	1×10^6
Fe-55	4×10^1	4×10^1	1×10^4	1×10^6
Fe-59	9×10^{-1}	9×10^{-1}	1×10^1	1×10^6

For footnotes see pp. 42-45

SECTION IV

TABLE 2. BASIC RADIONUCLIDE VALUES (cont.)

Radionuclide (atomic number)	A_1 (TBq)	A_2 (TBq)	Activity concentration limit for exempt material (Bq/g)	Activity limit for an exempt <i>consignment</i> (Bq)
Fe-60 (a)	4×10^1	2×10^{-1}	1×10^2	1×10^5
Gallium (31)				
Ga-67	7×10^0	3×10^0	1×10^2	1×10^6
Ga-68	5×10^{-1}	5×10^{-1}	1×10^1	1×10^5
Ga-72	4×10^{-1}	4×10^{-1}	1×10^1	1×10^5
Gadolinium (64)				
Gd-146 (a)	5×10^{-1}	5×10^{-1}	1×10^1	1×10^6
Gd-148	2×10^1	2×10^{-3}	1×10^1	1×10^4
Gd-153	1×10^1	9×10^0	1×10^2	1×10^7
Gd-159	3×10^0	6×10^{-1}	1×10^3	1×10^6
Germanium (32)				
Ge-68 (a)	5×10^{-1}	5×10^{-1}	1×10^1	1×10^5
Ge-69	1×10^0	1×10^0	1×10^1	1×10^6
Ge-71	4×10^1	4×10^1	1×10^4	1×10^8
Ge-77	3×10^{-1}	3×10^{-1}	1×10^1	1×10^5
Hafnium (72)				
Hf-172 (a)	6×10^{-1}	6×10^{-1}	1×10^1	1×10^6
Hf-175	3×10^0	3×10^0	1×10^2	1×10^6
Hf-181	2×10^0	5×10^{-1}	1×10^1	1×10^6
Hf-182	Unlimited	Unlimited	1×10^2	1×10^6
Mercury (80)				
Hg-194 (a)	1×10^0	1×10^0	1×10^1	1×10^6
Hg-195m (a)	3×10^0	7×10^{-1}	1×10^2	1×10^6
Hg-197	2×10^1	1×10^1	1×10^2	1×10^7
Hg-197m	1×10^1	4×10^{-1}	1×10^2	1×10^6
Hg-203	5×10^0	1×10^0	1×10^2	1×10^5
Holmium (67)				
Ho-166	4×10^{-1}	4×10^{-1}	1×10^3	1×10^5

For footnotes see pp. 42-45

ACTIVITY LIMITS AND CLASSIFICATION

TABLE 2. BASIC RADIONUCLIDE VALUES (cont.)

Radionuclide (atomic number)	A_1 (TBq)	A_2 (TBq)	Activity concentration limit for exempt material (Bq/g)	Activity limit for an exempt <i>consignment</i> (Bq)
Ho-166m	6×10^{-1}	5×10^{-1}	1×10^1	1×10^6
Iodine (53)				
I-123	6×10^0	3×10^0	1×10^2	1×10^7
I-124	1×10^0	1×10^0	1×10^1	1×10^6
I-125	2×10^1	3×10^0	1×10^3	1×10^6
I-126	2×10^0	1×10^0	1×10^2	1×10^6
I-129	Unlimited	Unlimited	1×10^2	1×10^5
I-131	3×10^0	7×10^{-1}	1×10^2	1×10^6
I-132	4×10^{-1}	4×10^{-1}	1×10^1	1×10^5
I-133	7×10^{-1}	6×10^{-1}	1×10^1	1×10^6
I-134	3×10^{-1}	3×10^{-1}	1×10^1	1×10^5
I-135 (a)	6×10^{-1}	6×10^{-1}	1×10^1	1×10^6
Indium (49)				
In-111	3×10^0	3×10^0	1×10^2	1×10^6
In-113m	4×10^0	2×10^0	1×10^2	1×10^6
In-114m (a)	1×10^1	5×10^{-1}	1×10^2	1×10^6
In-115m	7×10^0	1×10^0	1×10^2	1×10^6
Iridium (77)				
Ir-189 (a)	1×10^1	1×10^1	1×10^2	1×10^7
Ir-190	7×10^{-1}	7×10^{-1}	1×10^1	1×10^6
Ir-192	1×10^0 (c)	6×10^{-1}	1×10^1	1×10^4
Ir-193m	4×10^1	4×10^0	1×10^4	1×10^7
Ir-194	3×10^{-1}	3×10^{-1}	1×10^2	1×10^5
Potassium (19)				
K-40	9×10^{-1}	9×10^{-1}	1×10^2	1×10^6
K-42	2×10^{-1}	2×10^{-1}	1×10^2	1×10^6
K-43	7×10^{-1}	6×10^{-1}	1×10^1	1×10^6

For footnotes see pp. 42-45

SECTION IV

TABLE 2. BASIC RADIONUCLIDE VALUES (cont.)

Radionuclide (atomic number)	A_1 (TBq)	A_2 (TBq)	Activity concentration limit for exempt material (Bq/g)	Activity limit for an exempt <i>consignment</i> (Bq)
Krypton (36)				
Kr-79	4×10^0	2×10^0	1×10^3	1×10^5
Kr-81	4×10^1	4×10^1	1×10^4	1×10^7
Kr-85	1×10^1	1×10^1	1×10^5	1×10^4
Kr-85m	8×10^0	3×10^0	1×10^3	1×10^{10}
Kr-87	2×10^{-1}	2×10^{-1}	1×10^2	1×10^9
Lanthanum (57)				
La-137	3×10^1	6×10^0	1×10^3	1×10^7
La-140	4×10^{-1}	4×10^{-1}	1×10^1	1×10^5
Lutetium (71)				
Lu-172	6×10^{-1}	6×10^{-1}	1×10^1	1×10^6
Lu-173	8×10^0	8×10^0	1×10^2	1×10^7
Lu-174	9×10^0	9×10^0	1×10^2	1×10^7
Lu-174m	2×10^1	1×10^1	1×10^2	1×10^7
Lu-177	3×10^1	7×10^{-1}	1×10^3	1×10^7
Magnesium (12)				
Mg-28 (a)	3×10^{-1}	3×10^{-1}	1×10^1	1×10^5
Manganese (25)				
Mn-52	3×10^{-1}	3×10^{-1}	1×10^1	1×10^5
Mn-53	Unlimited	Unlimited	1×10^4	1×10^9
Mn-54	1×10^0	1×10^0	1×10^1	1×10^6
Mn-56	3×10^{-1}	3×10^{-1}	1×10^1	1×10^5
Molybdenum (42)				
Mo-93	4×10^1	2×10^1	1×10^3	1×10^8
Mo-99 (a)	1×10^0	6×10^{-1}	1×10^2	1×10^6
Nitrogen (7)				
N-13	9×10^{-1}	6×10^{-1}	1×10^2	1×10^9

For footnotes see pp. 42-45

ACTIVITY LIMITS AND CLASSIFICATION

TABLE 2. BASIC RADIONUCLIDE VALUES (cont.)

Radionuclide (atomic number)	A_1 (TBq)	A_2 (TBq)	Activity concentration limit for exempt material (Bq/g)	Activity limit for an exempt <i>consignment</i> (Bq)
Sodium (11)				
Na-22	5×10^{-1}	5×10^{-1}	1×10^1	1×10^6
Na-24	2×10^{-1}	2×10^{-1}	1×10^1	1×10^5
Niobium (41)				
Nb-93m	4×10^1	3×10^1	1×10^4	1×10^7
Nb-94	7×10^{-1}	7×10^{-1}	1×10^1	1×10^6
Nb-95	1×10^0	1×10^0	1×10^1	1×10^6
Nb-97	9×10^{-1}	6×10^{-1}	1×10^1	1×10^6
Neodymium (60)				
Nd-147	6×10^0	6×10^{-1}	1×10^2	1×10^6
Nd-149	6×10^{-1}	5×10^{-1}	1×10^2	1×10^6
Nickel (28)				
Ni-57	6×10^{-1}	6×10^{-1}	1×10^1	1×10^6
Ni-59	Unlimited	Unlimited	1×10^4	1×10^8
Ni-63	4×10^1	3×10^1	1×10^5	1×10^8
Ni-65	4×10^{-1}	4×10^{-1}	1×10^1	1×10^6
Neptunium (93)				
Np-235	4×10^1	4×10^1	1×10^3	1×10^7
Np-236 (short lived)	2×10^1	2×10^0	1×10^3	1×10^7
Np-236 (long lived)	9×10^0	2×10^{-2}	1×10^2	1×10^5
Np-237	2×10^1	2×10^{-3}	1×10^0 (b)	1×10^3 (b)
Np-239	7×10^0	4×10^{-1}	1×10^2	1×10^7
Osmium (76)				
Os-185	1×10^0	1×10^0	1×10^1	1×10^6
Os-191	1×10^1	2×10^0	1×10^2	1×10^7
Os-191m	4×10^1	3×10^1	1×10^3	1×10^7
Os-193	2×10^0	6×10^{-1}	1×10^2	1×10^6
Os-194 (a)	3×10^{-1}	3×10^{-1}	1×10^2	1×10^5

For footnotes see pp. 42-45

SECTION IV

TABLE 2. BASIC RADIONUCLIDE VALUES (cont.)

Radionuclide (atomic number)	A_1 (TBq)	A_2 (TBq)	Activity concentration limit for exempt material (Bq/g)	Activity limit for an exempt <i>consignment</i> (Bq)
Phosphorus (15)				
P-32	5×10^{-1}	5×10^{-1}	1×10^3	1×10^5
P-33	4×10^1	1×10^0	1×10^5	1×10^8
Protactinium (91)				
Pa-230 (a)	2×10^0	7×10^{-2}	1×10^1	1×10^6
Pa-231	4×10^0	4×10^{-4}	1×10^0	1×10^3
Pa-233	5×10^0	7×10^{-1}	1×10^2	1×10^7
Lead (82)				
Pb-201	1×10^0	1×10^0	1×10^1	1×10^6
Pb-202	4×10^1	2×10^1	1×10^3	1×10^6
Pb-203	4×10^0	3×10^0	1×10^2	1×10^6
Pb-205	Unlimited	Unlimited	1×10^4	1×10^7
Pb-210 (a)	1×10^0	5×10^{-2}	1×10^1 (b)	1×10^4 (b)
Pb-212 (a)	7×10^{-1}	2×10^{-1}	1×10^1 (b)	1×10^5 (b)
Palladium (46)				
Pd-103 (a)	4×10^1	4×10^1	1×10^3	1×10^8
Pd-107	Unlimited	Unlimited	1×10^5	1×10^8
Pd-109	2×10^0	5×10^{-1}	1×10^3	1×10^6
Promethium (61)				
Pm-143	3×10^0	3×10^0	1×10^2	1×10^6
Pm-144	7×10^{-1}	7×10^{-1}	1×10^1	1×10^6
Pm-145	3×10^1	1×10^1	1×10^3	1×10^7
Pm-147	4×10^1	2×10^0	1×10^4	1×10^7
Pm-148m (a)	8×10^{-1}	7×10^{-1}	1×10^1	1×10^6
Pm-149	2×10^0	6×10^{-1}	1×10^3	1×10^6
Pm-151	2×10^0	6×10^{-1}	1×10^2	1×10^6
Polonium (84)				
Po-210	4×10^1	2×10^{-2}	1×10^1	1×10^4

For footnotes see pp. 42-45

ACTIVITY LIMITS AND CLASSIFICATION

TABLE 2. BASIC RADIONUCLIDE VALUES (cont.)

Radionuclide (atomic number)	A_1 (TBq)	A_2 (TBq)	Activity concentration limit for exempt material (Bq/g)	Activity limit for an exempt <i>consignment</i> (Bq)
Praseodymium (59)				
Pr-142	4×10^{-1}	4×10^{-1}	1×10^2	1×10^5
Pr-143	3×10^0	6×10^{-1}	1×10^4	1×10^6
Platinum (78)				
Pt-188 (a)	1×10^0	8×10^{-1}	1×10^1	1×10^6
Pt-191	4×10^0	3×10^0	1×10^2	1×10^6
Pt-193	4×10^1	4×10^1	1×10^4	1×10^7
Pt-193m	4×10^1	5×10^{-1}	1×10^3	1×10^7
Pt-195m	1×10^1	5×10^{-1}	1×10^2	1×10^6
Pt-197	2×10^1	6×10^{-1}	1×10^3	1×10^6
Pt-197m	1×10^1	6×10^{-1}	1×10^2	1×10^6
Plutonium (94)				
Pu-236	3×10^1	3×10^{-3}	1×10^1	1×10^4
Pu-237	2×10^1	2×10^1	1×10^3	1×10^7
Pu-238	1×10^1	1×10^{-3}	1×10^0	1×10^4
Pu-239	1×10^1	1×10^{-3}	1×10^0	1×10^4
Pu-240	1×10^1	1×10^{-3}	1×10^0	1×10^3
Pu-241 (a)	4×10^1	6×10^{-2}	1×10^2	1×10^5
Pu-242	1×10^1	1×10^{-3}	1×10^0	1×10^4
Pu-244 (a)	4×10^{-1}	1×10^{-3}	1×10^0	1×10^4
Radium (88)				
Ra-223 (a)	4×10^{-1}	7×10^{-3}	1×10^2 (b)	1×10^5 (b)
Ra-224 (a)	4×10^{-1}	2×10^{-2}	1×10^1 (b)	1×10^5 (b)
Ra-225 (a)	2×10^{-1}	4×10^{-3}	1×10^2	1×10^5
Ra-226 (a)	2×10^{-1}	3×10^{-3}	1×10^1 (b)	1×10^4 (b)
Ra-228 (a)	6×10^{-1}	2×10^{-2}	1×10^1 (b)	1×10^5 (b)
Rubidium (37)				
Rb-81	2×10^0	8×10^{-1}	1×10^1	1×10^6

For footnotes see pp. 42–45

SECTION IV

TABLE 2. BASIC RADIONUCLIDE VALUES (cont.)

Radionuclide (atomic number)	A_1 (TBq)	A_2 (TBq)	Activity concentration limit for exempt material (Bq/g)	Activity limit for an exempt <i>consignment</i> (Bq)
Rb-83 (a)	2×10^0	2×10^0	1×10^2	1×10^6
Rb-84	1×10^0	1×10^0	1×10^1	1×10^6
Rb-86	5×10^{-1}	5×10^{-1}	1×10^2	1×10^5
Rb-87	Unlimited	Unlimited	1×10^4	1×10^7
Rb (natural)	Unlimited	Unlimited	1×10^4	1×10^7
Rhenium (75)				
Re-184	1×10^0	1×10^0	1×10^1	1×10^6
Re-184m	3×10^0	1×10^0	1×10^2	1×10^6
Re-186	2×10^0	6×10^{-1}	1×10^3	1×10^6
Re-187	Unlimited	Unlimited	1×10^6	1×10^9
Re-188	4×10^{-1}	4×10^{-1}	1×10^2	1×10^5
Re-189 (a)	3×10^0	6×10^{-1}	1×10^2	1×10^6
Re (natural)	Unlimited	Unlimited	1×10^6	1×10^9
Rhodium (45)				
Rh-99	2×10^0	2×10^0	1×10^1	1×10^6
Rh-101	4×10^0	3×10^0	1×10^2	1×10^7
Rh-102	5×10^{-1}	5×10^{-1}	1×10^1	1×10^6
Rh-102m	2×10^0	2×10^0	1×10^2	1×10^6
Rh-103m	4×10^1	4×10^1	1×10^4	1×10^8
Rh-105	1×10^1	8×10^{-1}	1×10^2	1×10^7
Radon (86)				
Rn-222 (a)	3×10^{-1}	4×10^{-3}	1×10^1 (b)	1×10^8 (b)
Ruthenium (44)				
Ru-97	5×10^0	5×10^0	1×10^2	1×10^7
Ru-103 (a)	2×10^0	2×10^0	1×10^2	1×10^6
Ru-105	1×10^0	6×10^{-1}	1×10^1	1×10^6
Ru-106 (a)	2×10^{-1}	2×10^{-1}	1×10^2 (b)	1×10^5 (b)

For footnotes see pp. 42-45

ACTIVITY LIMITS AND CLASSIFICATION

TABLE 2. BASIC RADIONUCLIDE VALUES (cont.)

Radionuclide (atomic number)	A_1 (TBq)	A_2 (TBq)	Activity concentration limit for exempt material (Bq/g)	Activity limit for an exempt <i>consignment</i> (Bq)
Sulphur (16)				
S-35	4×10^1	3×10^0	1×10^5	1×10^8
Antimony (51)				
Sb-122	4×10^{-1}	4×10^{-1}	1×10^2	1×10^4
Sb-124	6×10^{-1}	6×10^{-1}	1×10^1	1×10^6
Sb-125	2×10^0	1×10^0	1×10^2	1×10^6
Sb-126	4×10^{-1}	4×10^{-1}	1×10^1	1×10^5
Scandium (21)				
Sc-44	5×10^{-1}	5×10^{-1}	1×10^1	1×10^5
Sc-46	5×10^{-1}	5×10^{-1}	1×10^1	1×10^6
Sc-47	1×10^1	7×10^{-1}	1×10^2	1×10^6
Sc-48	3×10^{-1}	3×10^{-1}	1×10^1	1×10^5
Selenium (34)				
Se-75	3×10^0	3×10^0	1×10^2	1×10^6
Se-79	4×10^1	2×10^0	1×10^4	1×10^7
Silicon (14)				
Si-31	6×10^{-1}	6×10^{-1}	1×10^3	1×10^6
Si-32	4×10^1	5×10^{-1}	1×10^3	1×10^6
Samarium (62)				
Sm-145	1×10^1	1×10^1	1×10^2	1×10^7
Sm-147	Unlimited	Unlimited	1×10^1	1×10^4
Sm-151	4×10^1	1×10^1	1×10^4	1×10^8
Sm-153	9×10^0	6×10^{-1}	1×10^2	1×10^6
Tin (50)				
Sn-113 (a)	4×10^0	2×10^0	1×10^3	1×10^7
Sn-117m	7×10^0	4×10^{-1}	1×10^2	1×10^6
Sn-119m	4×10^1	3×10^1	1×10^3	1×10^7
Sn-121m (a)	4×10^1	9×10^{-1}	1×10^3	1×10^7

For footnotes see pp. 42-45

TABLE 2. BASIC RADIONUCLIDE VALUES (cont.)

Radionuclide (atomic number)	A_1	A_2	Activity concentration limit for exempt material	Activity limit for an exempt <i>consignment</i>
	(TBq)	(TBq)	(Bq/g)	(Bq)
Sn-123	8×10^{-1}	6×10^{-1}	1×10^3	1×10^6
Sn-125	4×10^{-1}	4×10^{-1}	1×10^2	1×10^5
Sn-126 (a)	6×10^{-1}	4×10^{-1}	1×10^1	1×10^5
Strontium (38)				
Sr-82 (a)	2×10^{-1}	2×10^{-1}	1×10^1	1×10^5
Sr-83	1×10^0	1×10^0	1×10^1	1×10^6
Sr-85	2×10^0	2×10^0	1×10^2	1×10^6
Sr-85m	5×10^0	5×10^0	1×10^2	1×10^7
Sr-87m	3×10^0	3×10^0	1×10^2	1×10^6
Sr-89	6×10^{-1}	6×10^{-1}	1×10^3	1×10^6
Sr-90 (a)	3×10^{-1}	3×10^{-1}	1×10^2 (b)	1×10^4 (b)
Sr-91 (a)	3×10^{-1}	3×10^{-1}	1×10^1	1×10^5
Sr-92 (a)	1×10^0	3×10^{-1}	1×10^1	1×10^6
Tritium (1)				
T(H-3)	4×10^1	4×10^1	1×10^6	1×10^9
Tantalum (73)				
Ta-178 (long lived)	1×10^0	8×10^{-1}	1×10^1	1×10^6
Ta-179	3×10^1	3×10^1	1×10^3	1×10^7
Ta-182	9×10^{-1}	5×10^{-1}	1×10^1	1×10^4
Terbium (65)				
Tb-149	8×10^{-1}	8×10^{-1}	1×10^1	1×10^6
Tb-157	4×10^1	4×10^1	1×10^4	1×10^7
Tb-158	1×10^0	1×10^0	1×10^1	1×10^6
Tb-160	1×10^0	6×10^{-1}	1×10^1	1×10^6
Tb-161	3×10^1	7×10^{-1}	1×10^3	1×10^6
Technetium (43)				
Tc-95m (a)	2×10^0	2×10^0	1×10^1	1×10^6
Tc-96	4×10^{-1}	4×10^{-1}	1×10^1	1×10^6

For footnotes see pp. 42-45

TABLE 2. BASIC RADIONUCLIDE VALUES (cont.)

Radionuclide (atomic number)	A_1	A_2	Activity concentration limit for exempt material	Activity limit for an exempt <i>consignment</i>
	(TBq)	(TBq)	(Bq/g)	(Bq)
Tc-96m (a)	4×10^{-1}	4×10^{-1}	1×10^3	1×10^7
Tc-97	Unlimited	Unlimited	1×10^3	1×10^8
Tc-97m	4×10^1	1×10^0	1×10^3	1×10^7
Tc-98	8×10^{-1}	7×10^{-1}	1×10^1	1×10^6
Tc-99	4×10^1	9×10^{-1}	1×10^4	1×10^7
Tc-99m	1×10^1	4×10^0	1×10^2	1×10^7
Tellurium (52)				
Te-121	2×10^0	2×10^0	1×10^1	1×10^6
Te-121m	5×10^0	3×10^0	1×10^2	1×10^6
Te-123m	8×10^0	1×10^0	1×10^2	1×10^7
Te-125m	2×10^1	9×10^{-1}	1×10^3	1×10^7
Te-127	2×10^1	7×10^{-1}	1×10^3	1×10^6
Te-127m (a)	2×10^1	5×10^{-1}	1×10^3	1×10^7
Te-129	7×10^{-1}	6×10^{-1}	1×10^2	1×10^6
Te-129m (a)	8×10^{-1}	4×10^{-1}	1×10^3	1×10^6
Te-131m (a)	7×10^{-1}	5×10^{-1}	1×10^1	1×10^6
Te-132 (a)	5×10^{-1}	4×10^{-1}	1×10^2	1×10^7
Thorium (90)				
Th-227	1×10^1	5×10^{-3}	1×10^1	1×10^4
Th-228 (a)	5×10^{-1}	1×10^{-3}	1×10^0 (b)	1×10^4 (b)
Th-229	5×10^0	5×10^{-4}	1×10^0 (b)	1×10^3 (b)
Th-230	1×10^1	1×10^{-3}	1×10^0	1×10^4
Th-231	4×10^1	2×10^{-2}	1×10^3	1×10^7
Th-232	Unlimited	Unlimited	1×10^1	1×10^4
Th-234 (a)	3×10^{-1}	3×10^{-1}	1×10^3 (b)	1×10^5 (b)
Th (natural)	Unlimited	Unlimited	1×10^0 (b)	1×10^3 (b)
Titanium (22)				
Ti-44 (a)	5×10^{-1}	4×10^{-1}	1×10^1	1×10^5

For footnotes see pp. 42–45

TABLE 2. BASIC RADIONUCLIDE VALUES (cont.)

Radionuclide (atomic number)	A_1	A_2	Activity concentration limit for exempt material	Activity limit for an exempt <i>consignment</i>
	(TBq)	(TBq)	(Bq/g)	(Bq)
Thallium (81)				
Tl-200	9×10^{-1}	9×10^{-1}	1×10^1	1×10^6
Tl-201	1×10^1	4×10^0	1×10^2	1×10^6
Tl-202	2×10^0	2×10^0	1×10^2	1×10^6
Tl-204	1×10^1	7×10^{-1}	1×10^4	1×10^4
Thulium (69)				
Tm-167	7×10^0	8×10^{-1}	1×10^2	1×10^6
Tm-170	3×10^0	6×10^{-1}	1×10^3	1×10^6
Tm-171	4×10^1	4×10^1	1×10^4	1×10^8
Uranium (92)				
U-230 (fast lung absorption) (a)(d)	4×10^1	1×10^{-1}	1×10^1 (b)	1×10^5 (b)
U-230 (medium lung absorption) (a)(e)	4×10^1	4×10^{-3}	1×10^1	1×10^4
U-230 (slow lung absorption) (a)(f)	3×10^1	3×10^{-3}	1×10^1	1×10^4
U-232 (fast lung absorption) (d)	4×10^1	1×10^{-2}	1×10^0 (b)	1×10^3 (b)
U-232 (medium lung absorption) (e)	4×10^1	7×10^{-3}	1×10^1	1×10^4
U-232 (slow lung absorption) (f)	1×10^1	1×10^{-3}	1×10^1	1×10^4
U-233 (fast lung absorption) (d)	4×10^1	9×10^{-2}	1×10^1	1×10^4
U-233 (medium lung absorption) (e)	4×10^1	2×10^{-2}	1×10^2	1×10^5
U-233 (slow lung absorption) (f)	4×10^1	6×10^{-3}	1×10^1	1×10^5
U-234 (fast lung absorption) (d)	4×10^1	9×10^{-2}	1×10^1	1×10^4
U-234 (medium lung absorption) (e)	4×10^1	2×10^{-2}	1×10^2	1×10^5

For footnotes see pp. 42–45

TABLE 2. BASIC RADIONUCLIDE VALUES (cont.)

Radionuclide (atomic number)	A_1	A_2	Activity concentration limit for exempt material	Activity limit for an exempt <i>consignment</i>
	(TBq)	(TBq)	(Bq/g)	(Bq)
U-234 (slow lung absorption) (f)	4×10^1	6×10^{-3}	1×10^1	1×10^5
U-235 (all lung absorption types) (a)(d)(e)(f)	Unlimited	Unlimited	1×10^1 (b)	1×10^4 (b)
U-236 (fast lung absorption) (d)	Unlimited	Unlimited	1×10^1	1×10^4
U-236 (medium lung absorption) (e)	4×10^1	2×10^{-2}	1×10^2	1×10^5
U-236 (slow lung absorption) (f)	4×10^1	6×10^{-3}	1×10^1	1×10^4
U-238 (all lung absorption types) (d)(e) (f)	Unlimited	Unlimited	1×10^1 (b)	1×10^4 (b)
U (natural)	Unlimited	Unlimited	1×10^0 (b)	1×10^3 (b)
U (enriched to 20% or less) (g)	Unlimited	Unlimited	1×10^0	1×10^3
U (depleted)	Unlimited	Unlimited	1×10^0	1×10^3
Vanadium (23)				
V-48	4×10^{-1}	4×10^{-1}	1×10^1	1×10^5
V-49	4×10^1	4×10^1	1×10^4	1×10^7
Tungsten (74)				
W-178 (a)	9×10^0	5×10^0	1×10^1	1×10^6
W-181	3×10^1	3×10^1	1×10^3	1×10^7
W-185	4×10^1	8×10^{-1}	1×10^4	1×10^7
W-187	2×10^0	6×10^{-1}	1×10^2	1×10^6
W-188 (a)	4×10^{-1}	3×10^{-1}	1×10^2	1×10^5
Xenon (54)				
Xe-122 (a)	4×10^{-1}	4×10^{-1}	1×10^2	1×10^9
Xe-123	2×10^0	7×10^{-1}	1×10^2	1×10^9
Xe-127	4×10^0	2×10^0	1×10^3	1×10^5

For footnotes see pp. 42-45

TABLE 2. BASIC RADIONUCLIDE VALUES (cont.)

Radionuclide (atomic number)	A_1	A_2	Activity concentration limit for exempt material	Activity limit for an exempt <i>consignment</i>
	(TBq)	(TBq)	(Bq/g)	(Bq)
Xe-131m	4×10^1	4×10^1	1×10^4	1×10^4
Xe-133	2×10^1	1×10^1	1×10^3	1×10^4
Xe-135	3×10^0	2×10^0	1×10^3	1×10^{10}
Yttrium (39)				
Y-87 (a)	1×10^0	1×10^0	1×10^1	1×10^6
Y-88	4×10^{-1}	4×10^{-1}	1×10^1	1×10^6
Y-90	3×10^{-1}	3×10^{-1}	1×10^3	1×10^5
Y-91	6×10^{-1}	6×10^{-1}	1×10^3	1×10^6
Y-91m	2×10^0	2×10^0	1×10^2	1×10^6
Y-92	2×10^{-1}	2×10^{-1}	1×10^2	1×10^5
Y-93	3×10^{-1}	3×10^{-1}	1×10^2	1×10^5
Ytterbium (70)				
Yb-169	4×10^0	1×10^0	1×10^2	1×10^7
Yb-175	3×10^1	9×10^{-1}	1×10^3	1×10^7
Zinc (30)				
Zn-65	2×10^0	2×10^0	1×10^1	1×10^6
Zn-69	3×10^0	6×10^{-1}	1×10^4	1×10^6
Zn-69m (a)	3×10^0	6×10^{-1}	1×10^2	1×10^6
Zirconium (40)				
Zr-88	3×10^0	3×10^0	1×10^2	1×10^6
Zr-93	Unlimited	Unlimited	1×10^3 (b)	1×10^7 (b)
Zr-95 (a)	2×10^0	8×10^{-1}	1×10^1	1×10^6
Zr-97 (a)	4×10^{-1}	4×10^{-1}	1×10^1 (b)	1×10^5 (b)

A_1 and/or A_2 values for these parent radionuclides include contributions from their progeny with half-lives less than 10 days, as listed in the following:

Mg-28Al-28
 Ca-47Sc-47
 Ti-44Sc-44

Table 2, footnote (a) (cont.)

Fe-52	Mn-52m
Fe-60	Co-60m
Zn-69m	Zn-69
Ge-68	Ga-68
Rb-83	Kr-83m
Sr-82	Rb-82
Sr-90	Y-90
Sr-91	Y-91m
Sr-92	Y-92
Y-87	Sr-87m
Zr-95	Nb-95m
Zr-97	Nb-97m, Nb-97
Mo-99	Tc-99m
Tc-95m	Tc-95
Tc-96m	Tc-96
Ru-103	Rh-103m
Ru-106	Rh-106
Pd-103	Rh-103m
Ag-108m	Ag-108
Ag-110m	Ag-110
Cd-115	In-115m
In-114m	In-114
Sn-113	In-113m
Sn-121m	Sn-121
Sn-126	Sb-126m
Te-127m	Te-127
Te-129m	Te-129
Te-131m	Te-131
Te-132	I-132
I-135	Xe-135m
Xe-122	I-122
Cs-137	Ba-137m
Ba-131	Cs-131
Ba-140	La-140
Ce-144	Pr-144m, Pr-144
Pm-148m	Pm-148
Gd-146	Eu-146
Dy-166	Ho-166
Hf-172	Lu-172
W-178	Ta-178
W-188	Re-188
Re-189	Os-189m
Os-194	Ir-194
Ir-189	Os-189m
Pt-188	Ir-188

Table 2, footnote (a) (cont.)

Hg-194	Au-194
Hg-195m	Hg-195
Pb-210	Bi-210
Pb-212	Bi-212, Tl-208, Po-212
Bi-210m	Tl-206
Bi-212	Tl-208, Po-212
At-211	Po-211
Rn-222	Po-218, Pb-214, At-218, Bi-214, Po-214
Ra-223	Rn-219, Po-215, Pb-211, Bi-211, Po-211, Tl-207
Ra-224	Rn-220, Po-216, Pb-212, Bi-212, Tl-208, Po-212
Ra-225	Ac-225, Fr-221, At-217, Bi-213, Tl-209, Po-213, Pb-209
Ra-226	Rn-222, Po-218, Pb-214, At-218, Bi-214, Po-214
Ra-228	Ac-228
Ac-225	Fr-221, At-217, Bi-213, Tl-209, Po-213, Pb-209
Ac-227	Fr-223
Th-228	Ra-224, Rn-220, Po-216, Pb-212, Bi-212, Tl-208, Po-212
Th-234	Pa-234m, Pa-234
Pa-230	Ac-226, Th-226, Fr-222, Ra-222, Rn-218, Po-214
U-230	Th-226, Ra-222, Rn-218, Po-214
U-235	Th-231
Pu-241	U-237
Pu-244	U-240, Np-240m
Am-242m	Am-242, Np-238
Am-243	Np-239
Cm-247	Pu-243
Bk-249	Am-245
Cf-253	Cm-249

Parent nuclides and their progeny included in secular equilibrium are listed in the following (the activity to be taken into account is that of the parent nuclide only):

Sr-90	Y-90
Zr-93	Nb-93m
Zr-97	Nb-97
Ru-106	Rh-106
Ag-108m	Ag-108
Cs-137	Ba-137m
Ce-144	Pr-144
Ba-140	La-140
Bi-212	Tl-208 (0.36), Po-212 (0.64)
Pb-210	Bi-210, Po-210
Pb-212	Bi-212, Tl-208 (0.36), Po-212 (0.64)
Rn-222	Po-218, Pb-214, Bi-214, Po-214
Ra-223	Rn-219, Po-215, Pb-211, Bi-211, Tl-207
Ra-224	Rn-220, Po-216, Pb-212, Bi-212, Tl-208 (0.36), Po-212 (0.64)

Table 2, footnote (b) (cont.)

Ra-226	Rn-222, Po-218, Pb-214, Bi-214, Po-214, Pb-210, Bi-210, Po-210
Ra-228	Ac-228
Th-228	Ra-224, Rn-220, Po-216, Pb-212, Bi-212, Tl-208 (0.36), Po-212 (0.64)
Th-229	Ra-225, Ac-225, Fr-221, At-217, Bi-213, Po-213, Pb-209
Th-natural*	Ra-228, Ac-228, Th-228, Ra-224, Rn-220, Po-216, Pb-212, Bi-212, Tl-208 (0.36), Po-212 (0.64)
Th-234	Pa-234m
U-230	Th-226, Ra-222, Rn-218, Po-214
U-232	Th-228, Ra-224, Rn-220, Po-216, Pb-212, Bi-212, Tl-208 (0.36), Po-212 (0.64)
U-235	Th-231
U-238	Th-234, Pa-234m
U-natural*	Th-234, Pa-234m, U-234, Th-230, Ra-226, Rn-222, Po-218, Pb-214, Bi-214, Po-214, Pb-210, Bi-210, Po-210
Np-237	Pa-233
Am-242m	Am-242
Am-243	Np-239

In the case of Th-natural, the parent nuclide is Th-232; in the case of U-natural the parent nuclide is U-238.

The quantity may be determined from a measurement of the rate of decay or a measurement of the *dose rate* at a prescribed distance from the source.

These values apply only to compounds of *uranium* that take the chemical form of UF₆, UO₂F₂ and UO₂(NO₃)₂ in both normal and accident conditions of transport.

These values apply only to compounds of *uranium* that take the chemical form of UO₃, UF₄, UCl₄ and hexavalent compounds in both normal and accident conditions of transport.

These values apply to all compounds of *uranium* other than those specified in (d) and (e) above.

These values apply to *unirradiated uranium* only.

SECTION IV

TABLE 3. BASIC RADIONUCLIDE VALUES FOR UNKNOWN RADIONUCLIDES OR MIXTURES

<i>Radioactive content</i>	<i>A</i> ₁	<i>A</i> ₂	Activity concentration limit for exempt material	Activity limit for an exempt <i>consignment</i>
	(TBq)	(TBq)	(Bq/g)	(Bq)
Only beta or gamma emitting nuclides are known to be present	0.1	0.02	1×10 ¹	1×10 ⁴
Alpha emitting nuclides, but no neutron emitters are known to be present	0.2	9 × 10 ⁻⁵	1 × 10 ⁻¹	1×10 ³
Neutron emitting nuclides are known to be present or no relevant data are available	0.001	9 × 10 ⁻⁵	1 × 10 ⁻¹	1×10 ³

TABLE 4. ACTIVITY LIMITS FOR EXCEPTED PACKAGES

Physical state of Contents	Instrument or article		Materials
	Item limits ^a	Package limits ^a	Package limits ^a
Solids			
<i>Special form</i>	10 ⁻² <i>A</i> ₁	<i>A</i> ₁	10 ⁻³ <i>A</i> ₁
Other forms	10 ⁻² <i>A</i> ₂	<i>A</i> ₂	10 ⁻³ <i>A</i> ₂
Liquids	10 ⁻³ <i>A</i> ₂	10 ⁻¹ <i>A</i> ₂	10 ⁻⁴ <i>A</i> ₂
Gases			
Tritium	2 × 10 ⁻² <i>A</i> ₂	2 × 10 ⁻¹ <i>A</i> ₂	2 × 10 ⁻² <i>A</i> ₂
<i>Special form</i>	10 ⁻³ <i>A</i> ₁	10 ⁻² <i>A</i> ₁	10 ⁻³ <i>A</i> ₁
Other forms	10 ⁻³ <i>A</i> ₂	10 ⁻² <i>A</i> ₂	10 ⁻³ <i>A</i> ₂

For mixtures of radionuclides, see Regulations 15(3)–15(5).

TABLE 5. INDUSTRIAL PACKAGE REQUIREMENTS FOR LSA MATERIAL, LSO-I AND LSO-II

<i>Radioactive contents</i>	<i>Industrial package type</i>	
	<i>Exclusive use</i>	<i>Not under exclusive use</i>
<i>LSA-I</i>		
Solid ^a	<i>Type IP-1</i>	<i>Type IP-1</i>
Liquid	<i>Type IP-1</i>	<i>Type IP-2</i>
<i>LSA-II</i>		
Solid	<i>Type IP-2</i>	<i>Type IP-2</i>
Liquid and gas	<i>Type IP-2</i>	<i>Type IP-3</i>
<i>LSA-III</i>	<i>Type IP-2</i>	<i>Type IP-3</i>
<i>SCO-I</i> ^a	<i>Type IP-1</i>	<i>Type IP-1</i>
<i>SCO-II</i>	<i>Type IP-2</i>	<i>Type IP-2</i>

Under the conditions specified in Regulation 32(4), *LSA-I material* and *SCO-I* may be transported unpackaged.

TABLE 6. CONVEYANCE ACTIVITY LIMITS FOR LSA MATERIAL AND SCO IN INDUSTRIAL PACKAGES OR UNPACKAGED

Nature of material	Activity limit for <i>conveyances</i> other than inland waterway craft	Activity limit for a hold or compartment of an inland waterway craft
<i>LSA-I</i>	No limit	No limit
<i>LSA-II</i> and <i>LSA-III</i> non-combustible solids	No limit	100A ₂
<i>LSA-II</i> and <i>LSA-III</i> combustible solids and all liquids and gases	100A ₂	10A ₂
<i>SCO</i> ^a	100A ₂	10A ₂

For *SCO-III* see Regulation 32(6).

TABLE 7. MULTIPLICATION FACTORS FOR TANKS, FREIGHT CONTAINERS AND UNPACKAGED LSA-I, SCO-I AND SCO-III

Size of load ^a	Multiplication factor
size of load $\leq 1 \text{ m}^2$	1
$1 \text{ m}^2 < \text{size of load} \leq 5 \text{ m}^2$	2
$5 \text{ m}^2 < \text{size of load} \leq 20 \text{ m}^2$	3
$20 \text{ m}^2 < \text{size of load}$	10

Largest cross-sectional area of the load being measured.

TABLE 8. CATEGORIES OF PACKAGES, OVERPACKS AND FREIGHT CONTAINERS

Conditions	Maximum <i>dose rate</i> at any point on external surface	Category
<i>TI</i>		
0 ^a	Not more than 0.005 mSv/h	I-WHITE
More than 0 but not more than 1 ^a	More than 0.005 mSv/h but not more than 0.5 mSv/h	II-YELLOW
More than 1 but not more than 10	More than 0.5 mSv/h but not more than 2 mSv/h	III-YELLOW
More than 10	More than 2 mSv/h but not more than 10 mSv/h	III-YELLOW ^b

If the measured *TI* is not greater than 0.05, the value quoted may be zero in accordance with Regulation 33(1)(c).

Shall also be transported under *exclusive use* except for *freight containers* (see Table 10).

TABLE 9. UN MARKING FOR PACKAGES AND OVERPACKS

Item	UN marks ^a
<i>Package</i> (other than an <i>excepted package</i>)	UN number, preceded by the letters “UN”, and the proper shipping name
<i>Excepted package</i> (other than those in <i>consignments</i> accepted for international movement by post)	UN number, preceded by the letters “UN”
<i>Overpack</i> (other than an <i>overpack</i> containing only <i>excepted packages</i>)	UN number, preceded by the letters “UN” for each applicable UN number in the <i>overpack</i> , followed by the proper shippingname in the case of a <i>non-excepted package</i>
<i>Overpack</i> containing only <i>excepted packages</i> (other than <i>consignments</i> accepted for international movement by post)	UN number, preceded by the letters “UN” for each applicable UN number in the <i>overpack</i>
<i>Consignment</i> accepted for international movement by post	The requirement of Regulation 5

See Table 1 for listing of UN numbers and proper shipping names.

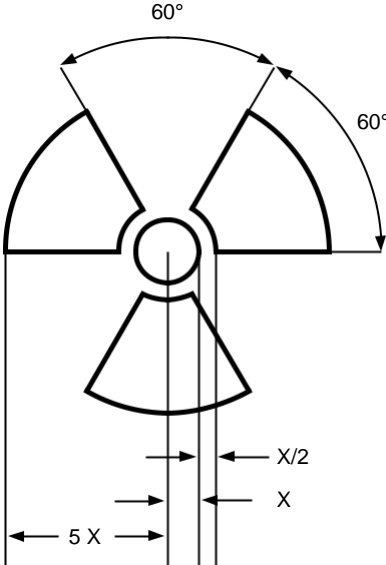


FIG. 1. Basic trefoil symbol with proportions based on a central circle of radius X .
The minimum allowable size of X shall be 4 mm.

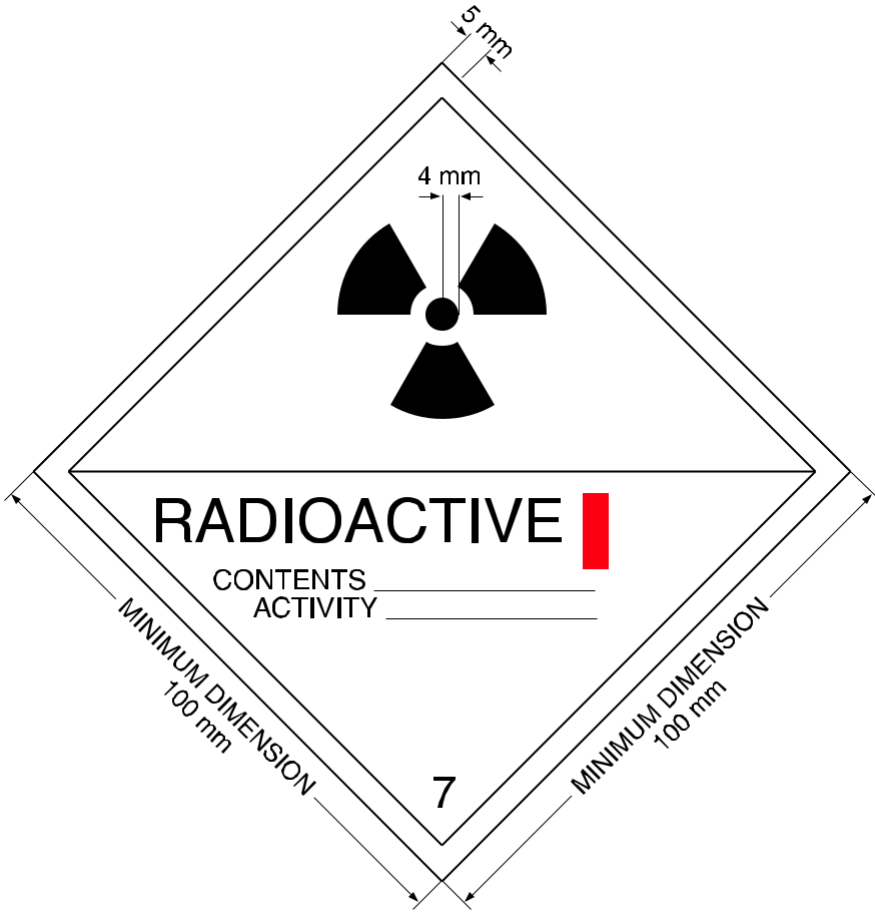


FIG. 2. Category I-WHITE label. *The minimum width of the line inside the edge forming the diamond shall be 2 mm. The background colour of the label shall be white, the colour of the trefoil and the printing shall be black, and the colour of the category bar shall be red.*

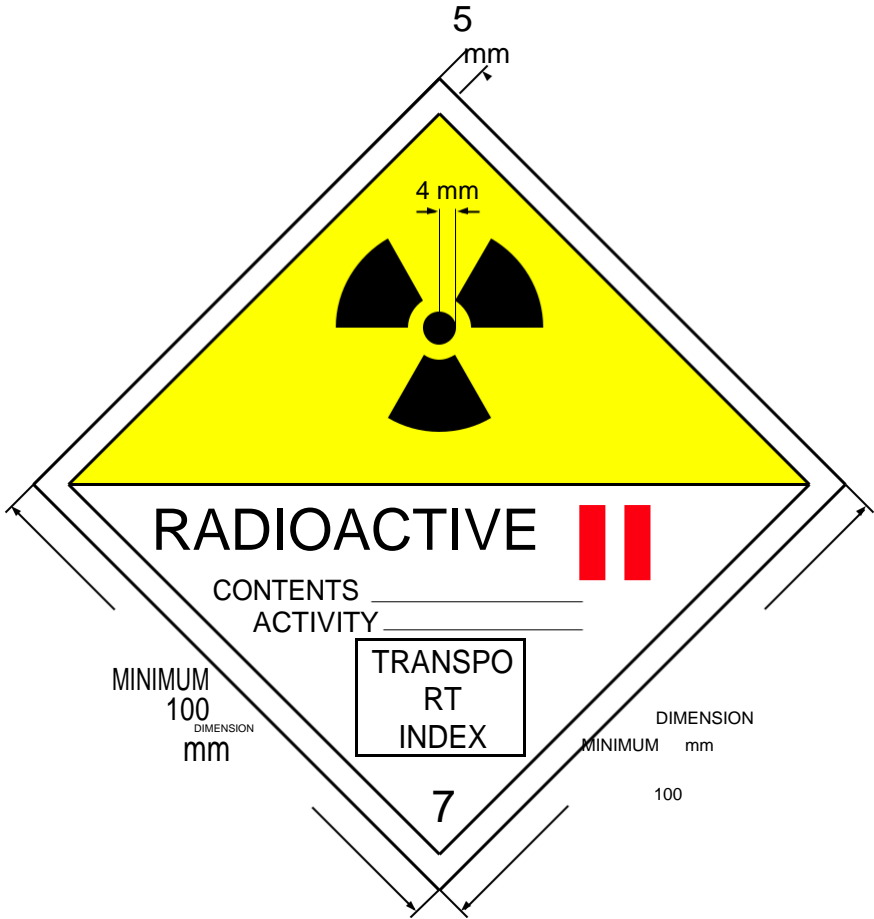


FIG. 3. Category II-YELLOW label. *The minimum width of the line inside the edge forming the diamond shall be 2 mm. The background colour of the upper half of the label shall be yellow and the lower half white, the colour of the trefoil and the printing shall be black, and the colour of the category bars shall be red.*

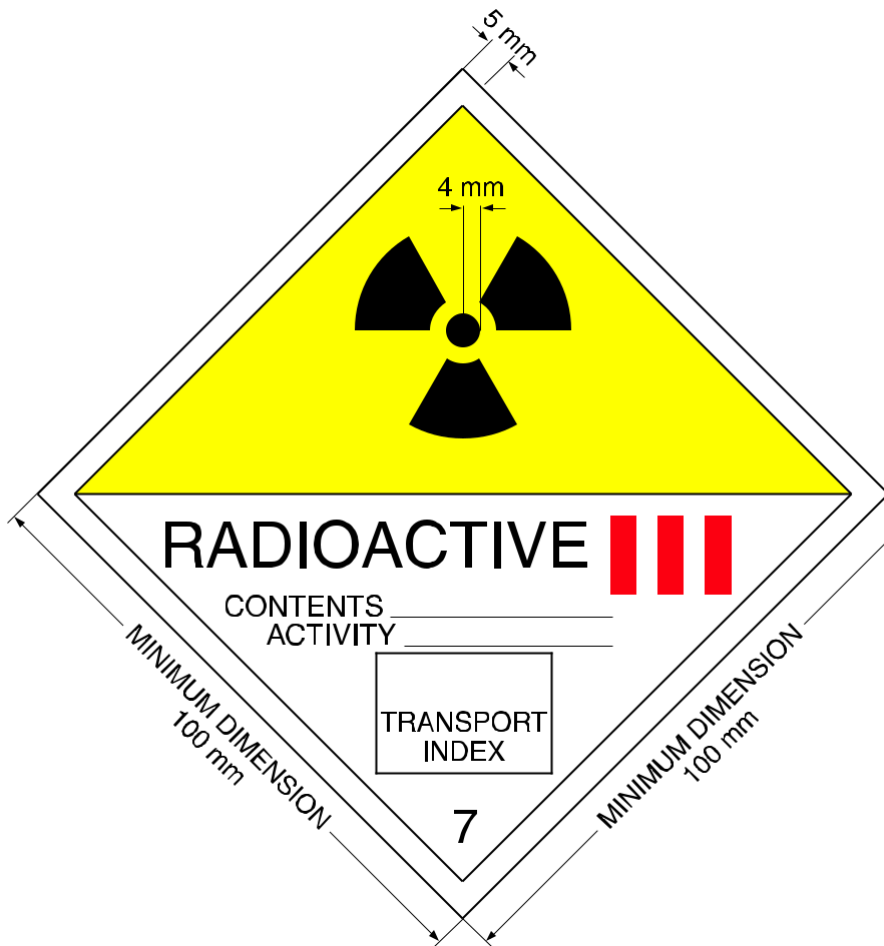


FIG. 4. Category III-YELLOW label. *The minimum width of the line inside the edge forming the diamond shall be 2 mm. The background colour of the upper half of the label shall be yellow and the lower half white, the colour of the trefoil and the printing shall be black, and the colour of the category bars shall be red.*

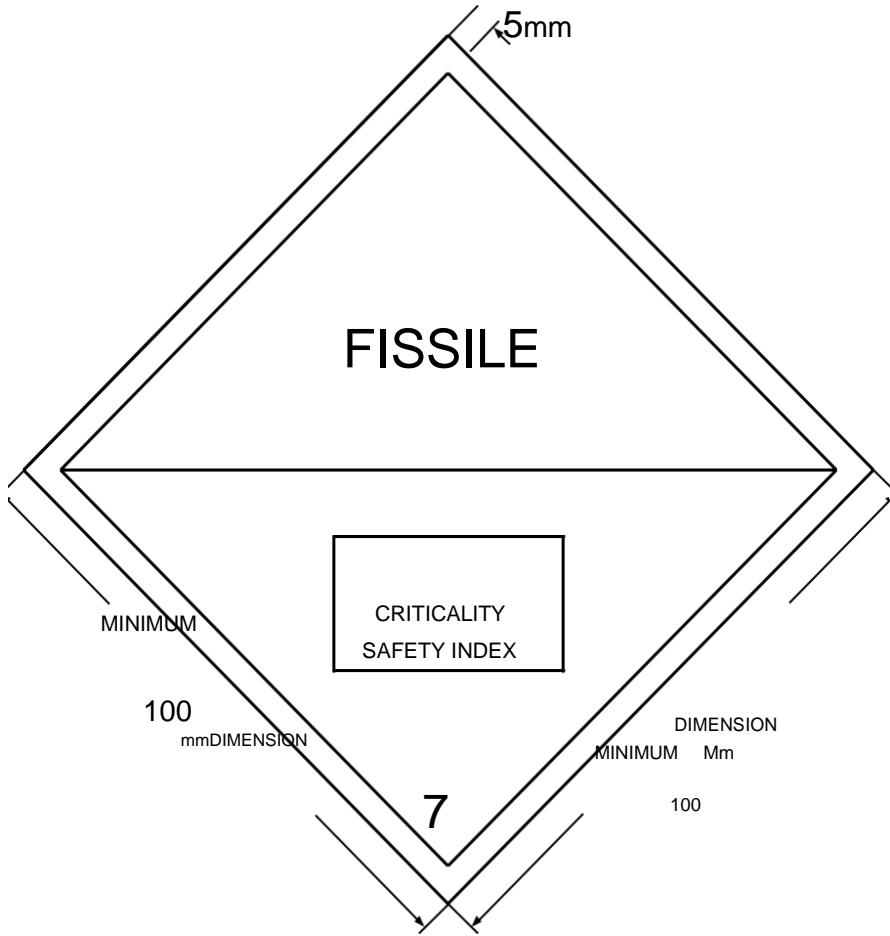


FIG. 5. CSI label. *The minimum width of the line inside the edge forming the diamond shall be 2 mm. The background colour of the label shall be white, the colour of the printing shall be black.*

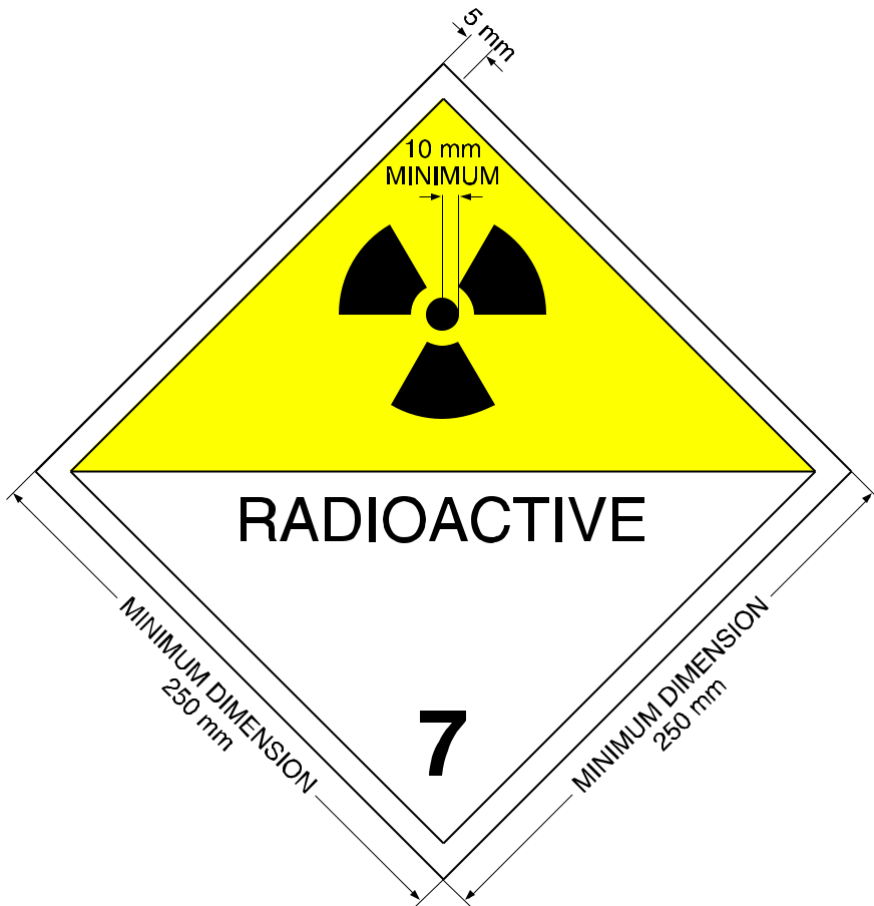


FIG. 6. Placard. Except as permitted by Regulation 48(1), minimum dimensions shall be as shown; when different dimensions are used, the relative proportions must be maintained. The number "7" shall not be less than 25 mm high. The background colour of the upper half of the placard shall be yellow and of the lower half white, the colour of the trefoil and the printing shall be black. The use of the word "RADIOACTIVE" in the bottom half is optional, to allow the alternative use of this placard to display the appropriate UN number for the consignment.

SECTION V

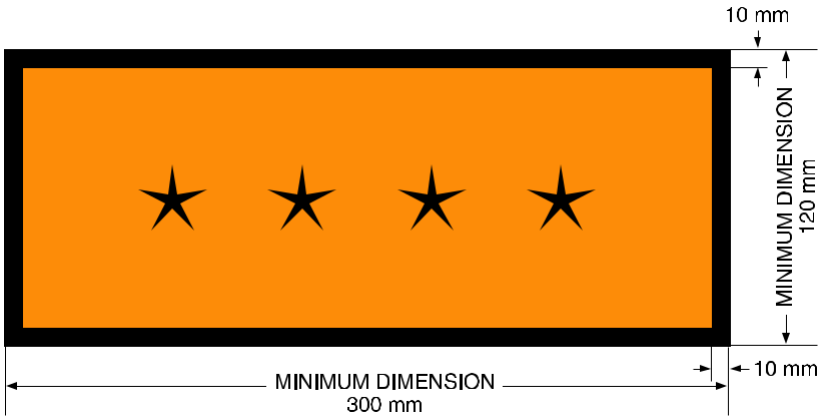


FIG. 7. Placard for separate display of UN number.

*The background colour of the placard shall be orange and the border and UN number shall be black. The symbol "****" denotes the space in which the appropriate UN number for radioactive material, as specified in Table 1, shall be displayed.*

TABLE 10. TRANSPORT INDEX LIMITS FOR FREIGHT CONTAINERS AND CONVEYANCES NOT UNDER EXCLUSIVE USE

Type of <i>freight container</i> or <i>conveyance</i>	Limit on sum of <i>TIs</i> in a <i>freight container</i> or aboard a <i>conveyance</i>
<i>Freight container:</i>	
<i>Small freight container</i>	50
<i>Large freight container</i>	50
<i>Vehicle</i>	50
<i>Aircraft:</i>	
Passenger	50
Cargo	200
Inland waterway craft	50
<i>Sea-going vessel^a:</i>	
<i>(i) Hold, compartment or defined deck area:</i>	
<i>Packages, overpacks, small freight containers</i>	50
<i>Large freight containers</i>	200
<i>(ii) Total vessel:</i>	
<i>Packages, overpacks, small freight containers</i>	200
<i>Large freight containers</i>	No limit

Packages or overpacks carried in or on a *vehicle* that are in accordance with the provisions of Regulation 48(3) may be transported by *vessels* provided that they are not removed from the *vehicle* at any time while on board the *vessel*.

TABLE 11. CSI LIMITS FOR FREIGHT CONTAINERS AND CONVEYANCES CONTAINING FISSILE MATERIAL

Type of <i>freight container</i> or <i>conveyance</i>	Limit on sum of <i>CSIs</i> in a <i>freight container</i> or aboard a <i>conveyance</i>	
	Not under <i>exclusive use</i>	Under <i>exclusive use</i>
<i>Freight container:</i>		
<i>Small freight container</i>	50	Not applicable
<i>Large freight container</i>	50	100
<i>Vehicle</i>	50	100
<i>Aircraft:</i>		
Passenger	50	Not applicable
Cargo	50	100
Inland waterway craft	50	100
Sea-going vessel ^a :		
(i) Hold, compartment or <i>defined deck area</i> :		
<i>Packages, overpacks, small freight containers</i>	50	100
<i>Large freight containers</i>	50	100
(ii) Total vessel:		
<i>Packages, overpacks, small freight containers</i>	200 ^b	200 ^c
<i>Large freight containers</i>	No limit ^b	No limit ^c

Packages or overpacks carried in or on a *vehicle* that are in accordance with the provisions of Regulation 48(3) may be transported by *vessels* provided that they are not removed from the *vehicle* at any time while on board the *vessel*. In this case, the entries under the heading “under *exclusive use*” apply.

TABLE 12. INSOLATION DATA

Case	Form and location of surface	Insolation for 12 h per day (W/m^2)
1	Flat surfaces transported horizontally — downward facing	0
2	Flat surfaces transported horizontally — upward facing	800
3	Surfaces transported vertically	200 ^a
4	Other downward facing (not horizontal) surfaces	200 ^a
5	All other surfaces	400 ^a

Alternatively, a sine function may be used, with an absorption coefficient adopted and the effects of possible reflection from neighbouring objects neglected.

TABLE 13. VALUES OF Z FOR CALCULATION OF CSI IN ACCORDANCE WITH REGULATION 68(2)

Enrichment ^a	Z
Uranium enriched up to 1.5%	2200
Uranium enriched up to 5%	850
Uranium enriched up to 10%	660
Uranium enriched up to 20%	580
Uranium enriched up to 100%	450

If a *package* contains *uranium* with varying enrichments of uranium-235, then the value corresponding to the highest enrichment shall be used for Z.

Plutonium may be of any isotopic composition provided that the amount of plutonium-241 is less than that of plutonium-240 in the *packag*

TABLE 14. FREE DROP DISTANCE FOR TESTING PACKAGES TO NORMAL CONDITIONS OF TRANSPORT

Package mass (kg)	Free drop distance (m)
package mass < 5 000	1.2
5 000 ≤ package mass < 10 000	0.9
10 000 ≤ package mass < 15 000	0.6
15 000 ≤ package mass	0.3

